


Model THC4452B

Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	4.4~5.2GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤0.5dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥22dB		
Amplitude Balance	≤±0.3dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±3°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.25:1	Operating Temperature	-55~+85°C
¹ Power Handling	Average ≤50Watt Peak ≤1KW	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	50g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

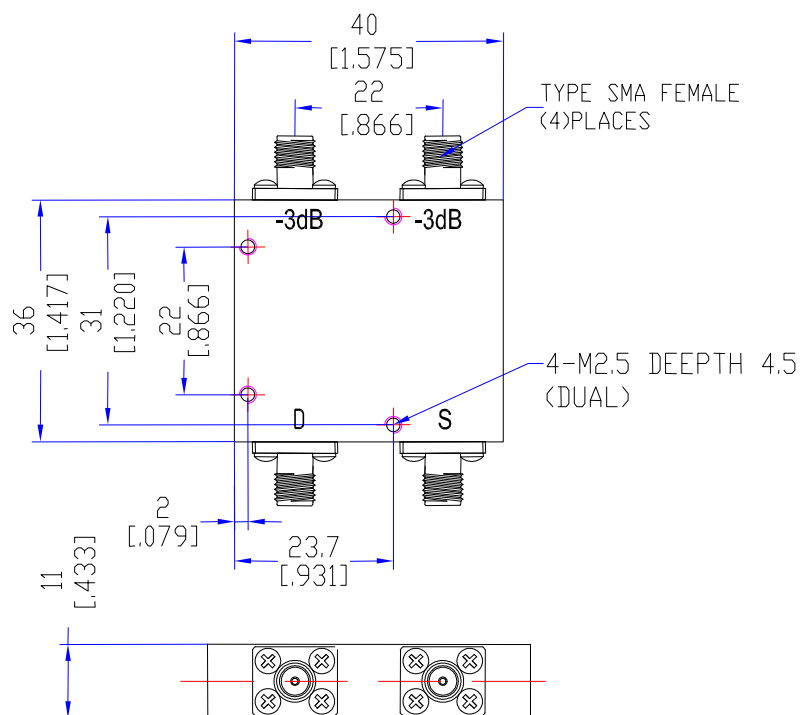

Typical Performance


1. Insertion Loss, Amplitude & Phase Balance, VSWR _ 0°

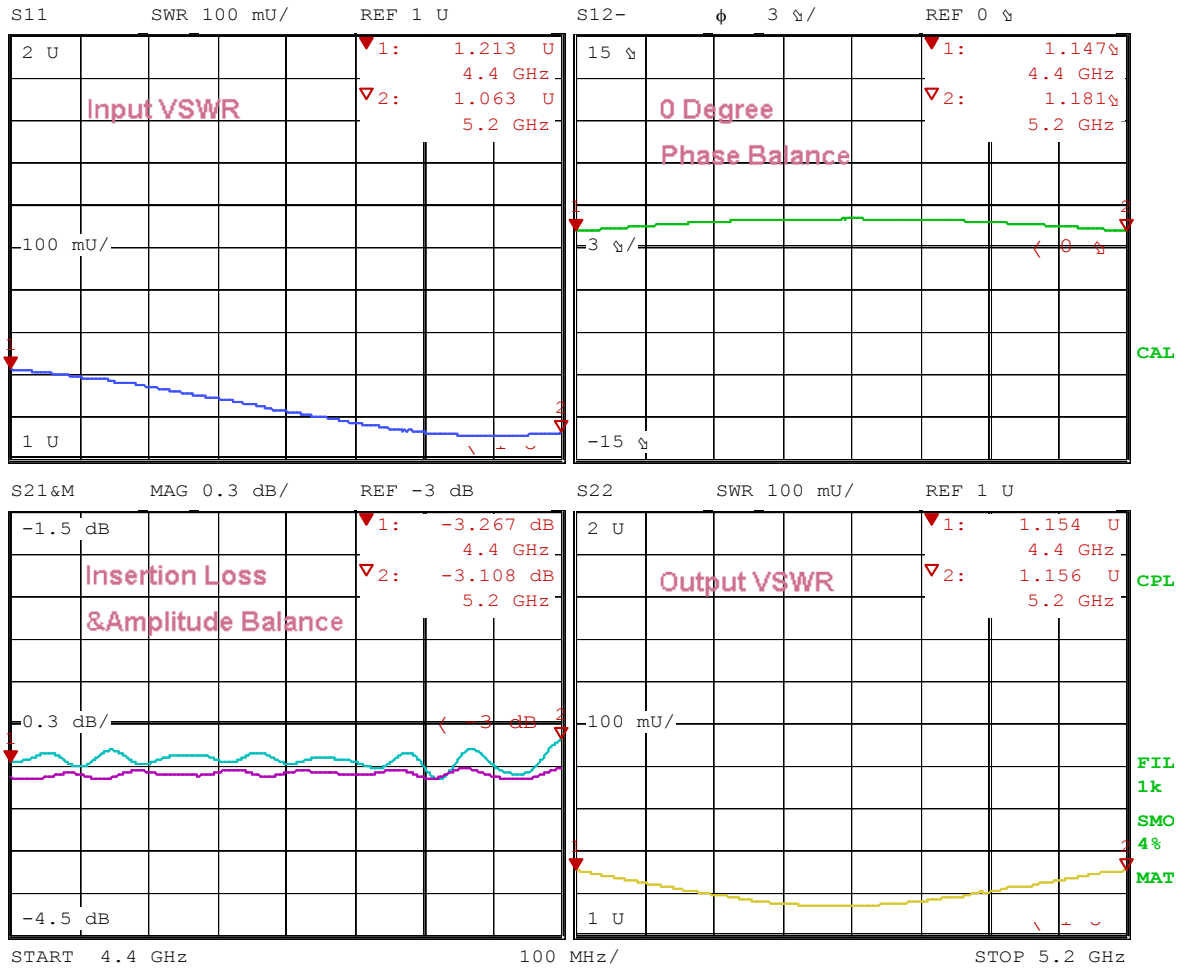

Date: 14.AUG.16 16:42:21



2. Insertion Loss, Amplitude/ Phase Balance, VSWR _ 180°

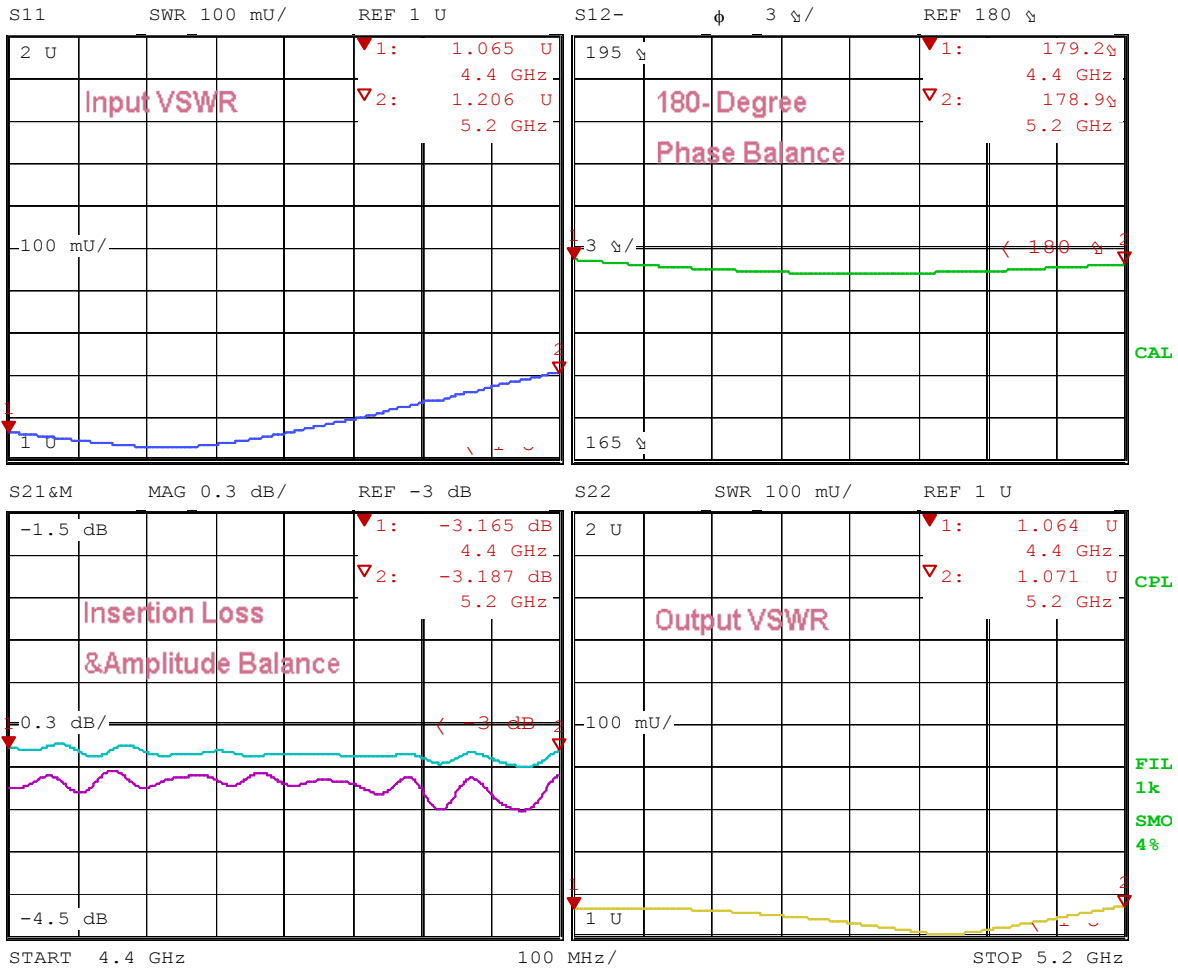

3. Isolation

