


## Model TPD10100A6

### Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	1~10GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤2.2dB (Above 7.78dB Split)	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.90:1 Output ≤1.70:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥17dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.8dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±10°	Operating Temperature	-55~+85°C
<sup>1</sup> Power Handling	Forward ≤10Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	520g
Port Connectors	SMA-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

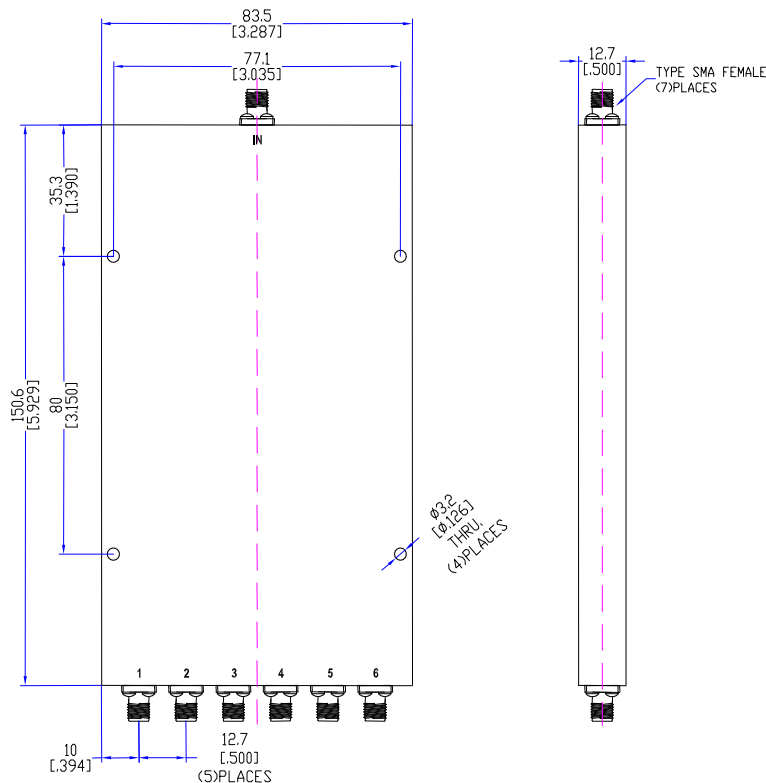


## Typical Performance

### 1. Insertion Loss, Amplitude &Phase Balance ,VSWR

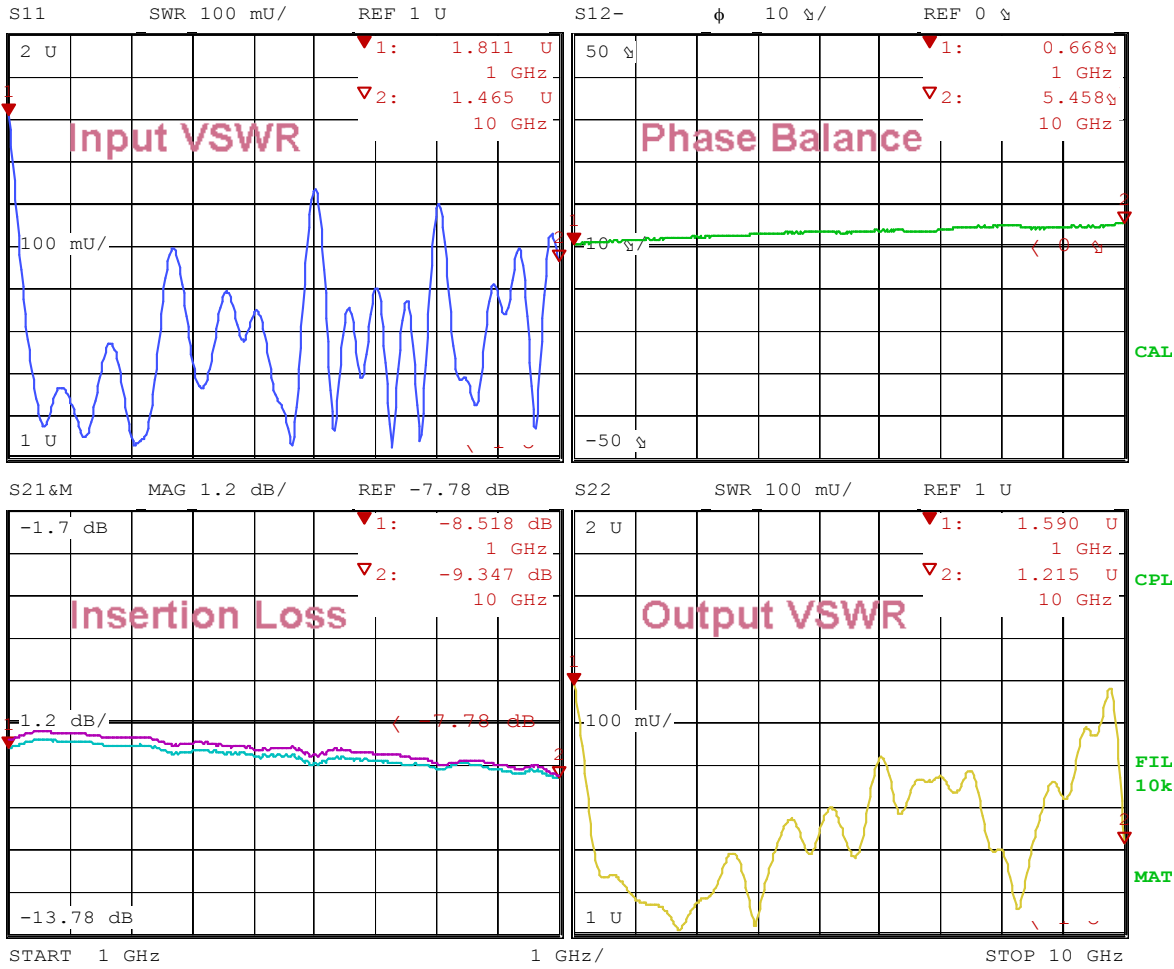

Date: 17.JAN.17 17:34:05

### 2. Isolation

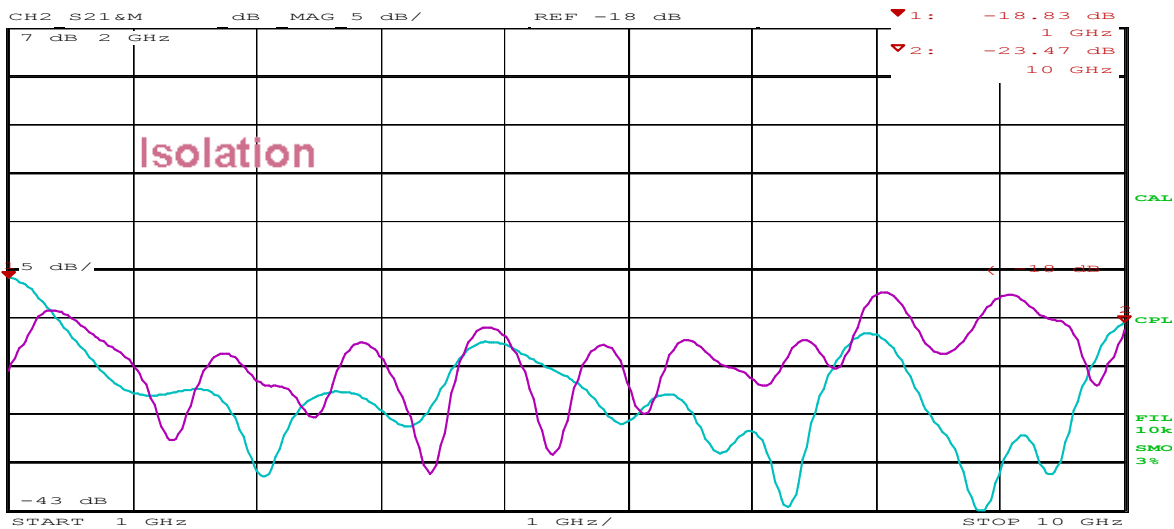

Date: 17.JAN.17 17:38:31

