


## Model TPD901090A10

### Features

Excellent phase & amplitude balance  
 Low Insertion Loss & VSWR  
 High Isolation


Technical Data Sheet			
Frequency Range	9 ~ 10GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤2.4dB (Above 10.0dB Split)	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.40:1 Output ≤1.40:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥20dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.5dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±5°	Operating Temperature	-55~+85°C
<sup>1</sup> Power Handling	Forward ≤30Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	300g
Port Connectors	SMA-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

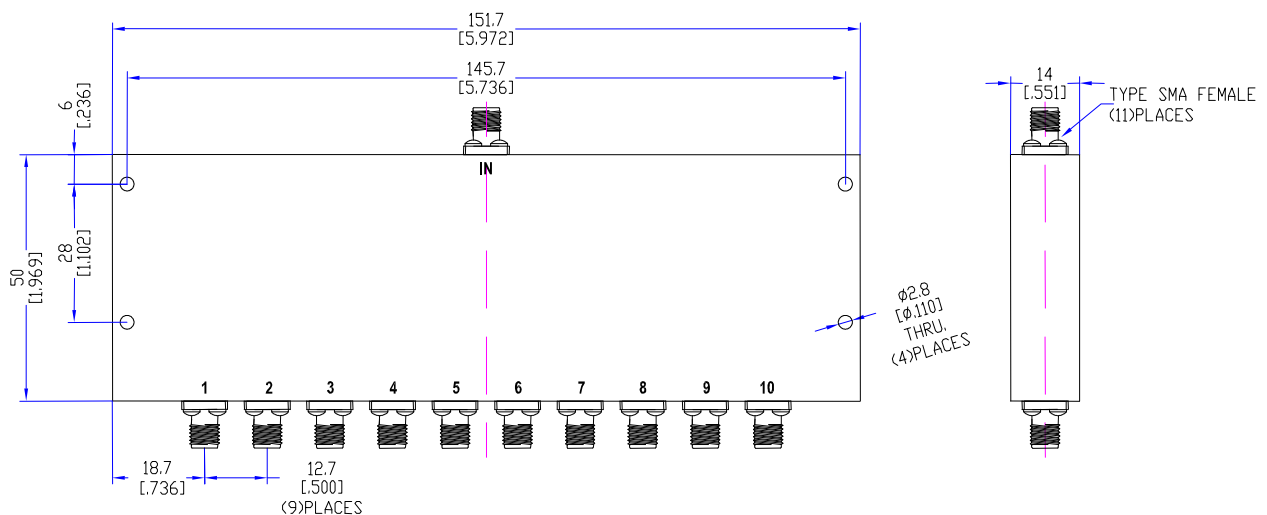

## Typical Performance

### 1. Insertion Loss, Amplitude &Phase Balance ,VSWR

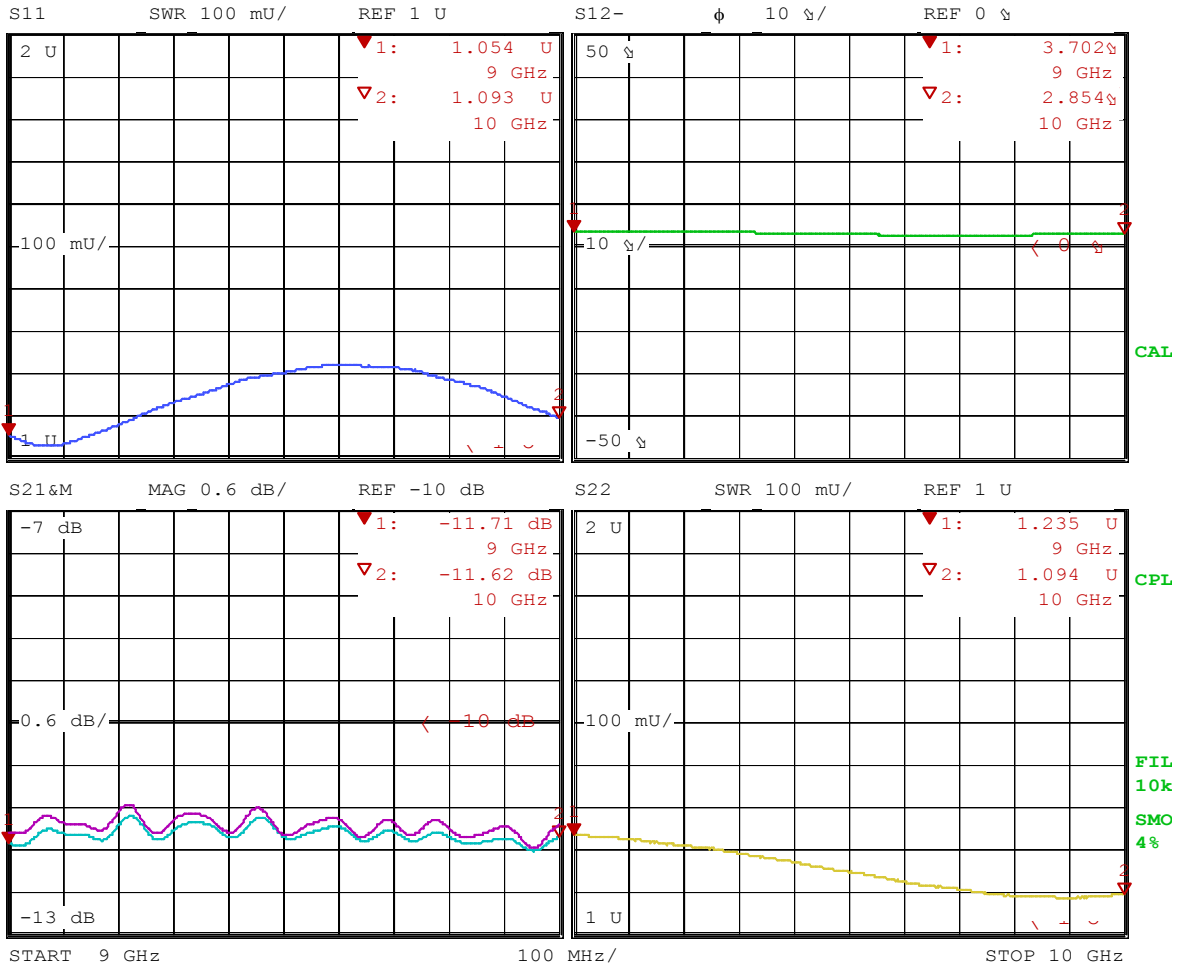

Date: 18.AUG.16 16:09:30

### 2. Isolation

