


Model THC2080A

Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


| Technical Data Sheet | | | |
|-----------------------------|------------------------------|-----------------------|---|
| Frequency Range | 2~8GHz | Finish | Painted Blue_ RAL #5007 |
| Nominal Split | 3.01dB | Connector Body | Passivated Stainless Steel |
| Insertion Loss | ≤0.7dB | Housing | Aluminum, 6061 T6 Clear Chem Conversion Film |
| Isolation | ≥20dB | | |
| Amplitude Balance | ≤±0.5dB | Connector Pin | Beryllium Copper, Gold Plate |
| Phase Balance | ≤±5° | Solder | Lead Free, RoHS Compliant |
| VSWR | ≤1.25:1 | Operating Temperature | -55~+85°C |
| ¹ Power Handling | Average ≤50Watt Peak ≤1KW | Operating Humidity | Up to 95%, Non- Condensing |
| Impedance | 50Ω | Weight | 30g |
| Port Connectors | SMA-Female | | |

¹Power Handling guaranteed when load's VSWR within 1.50:1.

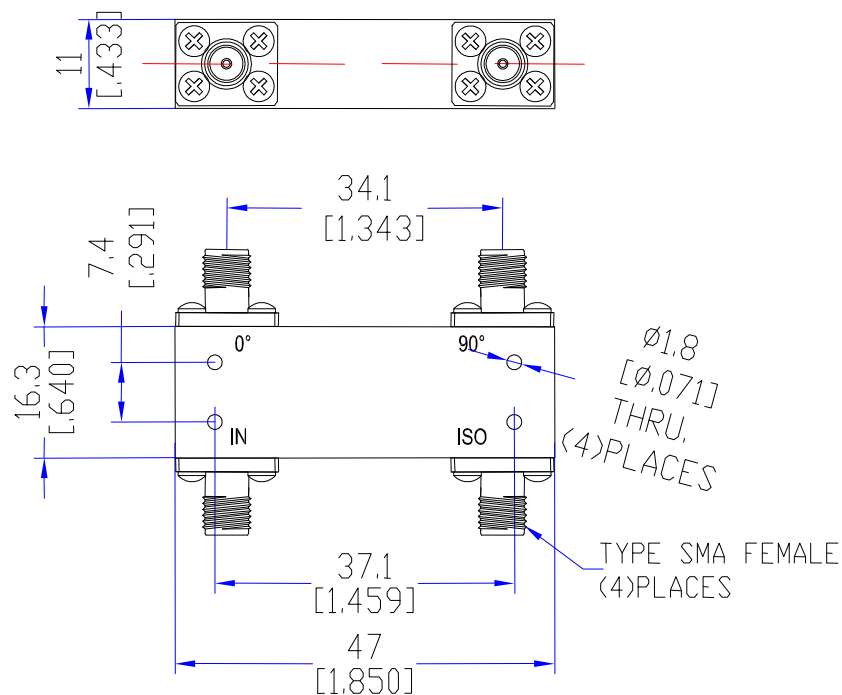


Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR

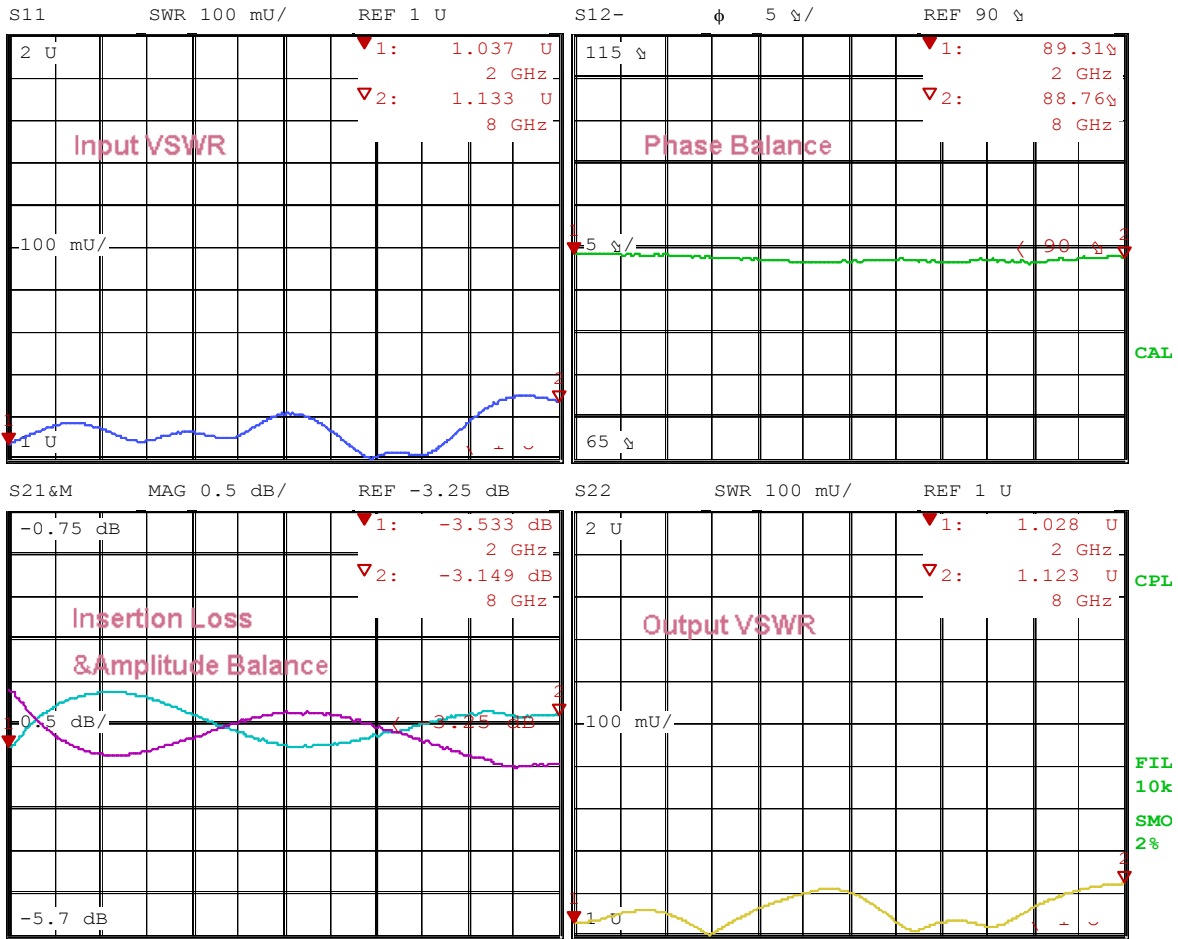

Date: 10.MAR.16 14:13:49

2. Isolation

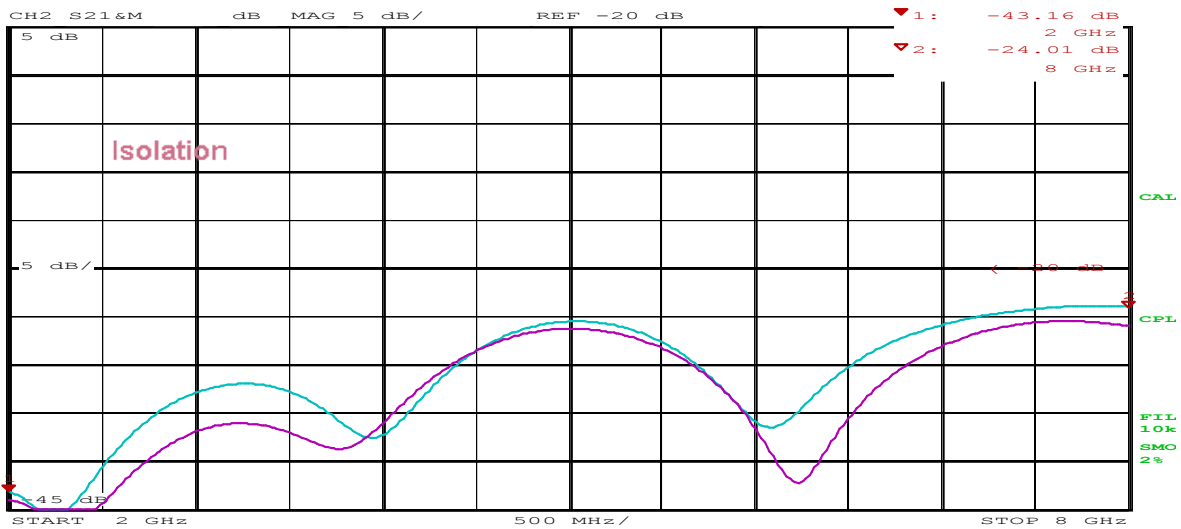

Date: 10.MAR.16 14:22:19

