


Model TDC0304N6A

Features

Low VSWR
High Directivity
Broadband & Miniature Size


| Technical Data Sheet | | | |
|-----------------------------|---------------------------------------|-----------------------|---|
| Frequency Range | 350~450MHz | Finish | Painted Blue_ RAL #5007 |
| Insertion Loss | ≤0.4dB (Excl. Coupling Loss 1.26dB) | Connector Body | Brass, Tri-Alloy Plate |
| Coupling Factor | ≤6±1dB | Housing | Aluminum, 6061 T6 Clear Chem Conversion Film |
| Coupling Sensitivity | ≤±0.5dB | Connector Pin | Beryllium Copper, Gold Plate |
| Directivity | ≥20dB | Solder | Lead Free, RoHS Compliant |
| VSWR | Primary ≤1.20:1 Secondary ≤1.20:1 | Operating Temperature | -20~+70°C |
| ¹ Power Handling | Incident ≤50Watt; Reflected ≤5Watt | Operating Humidity | Up to 95%, Non- Condensing |
| Impedance | 50Ω | Weight | 230g |
| Port Connectors | N-Female | | |

¹Power Handling guaranteed when load's VSWR within 1.50:1.

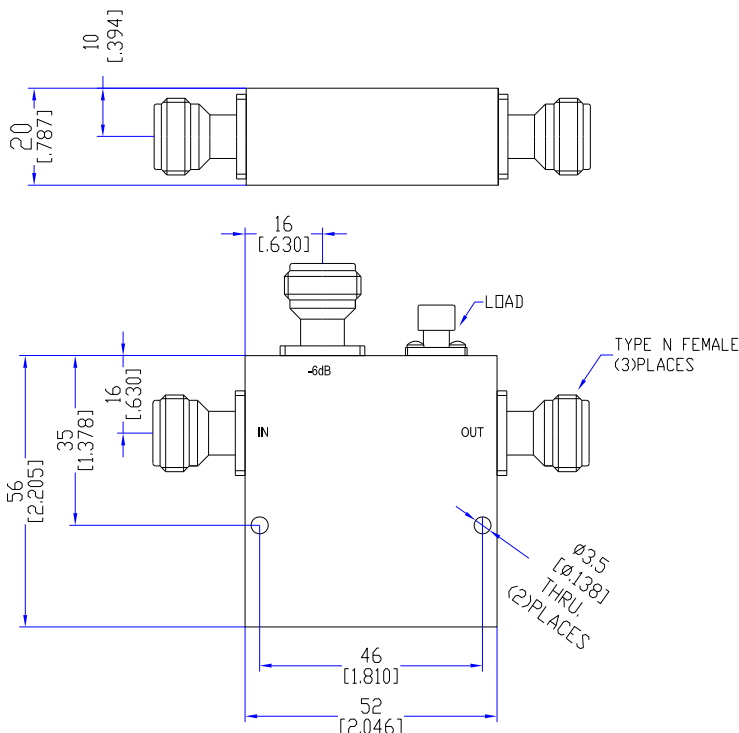


Typical Performance

1. Coupling Factor & Sensitivity, Isolation, VSWR

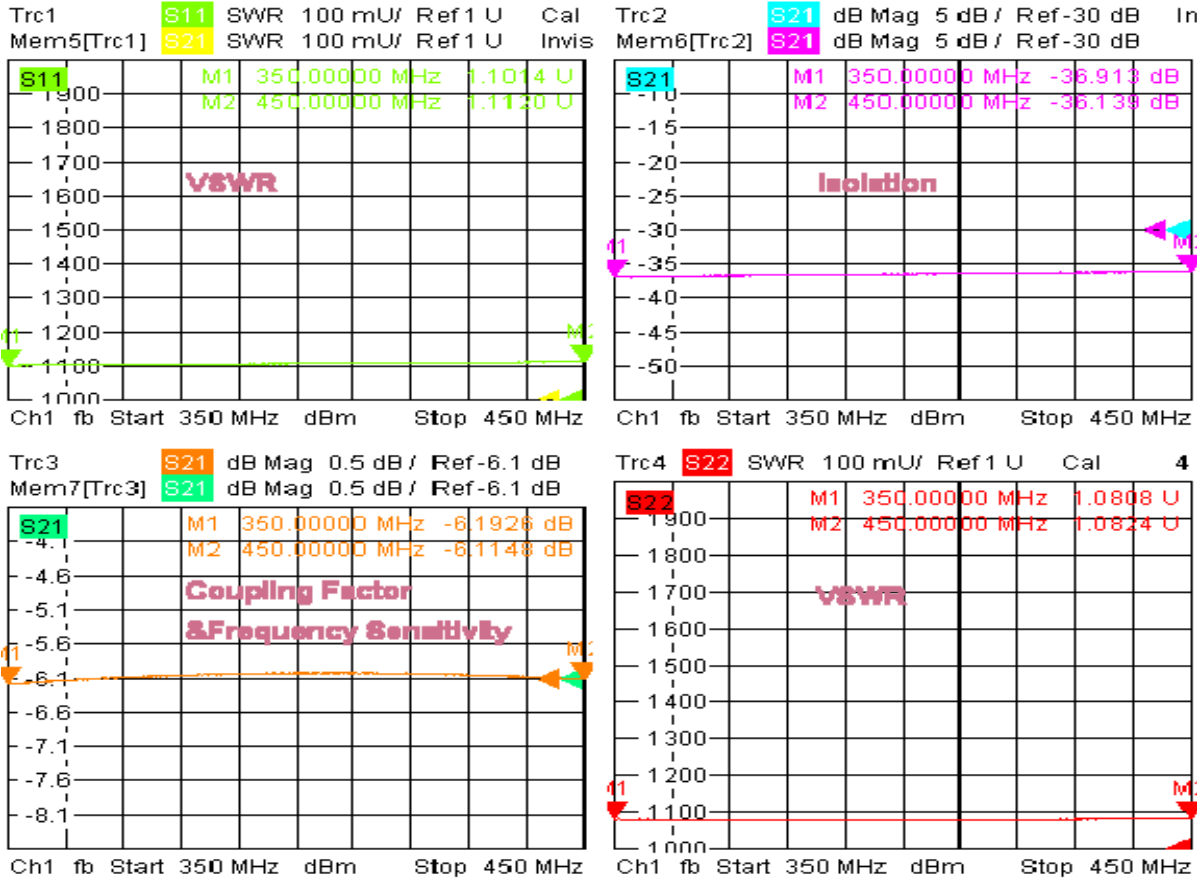

7/18/2018, 9:29 AM

2. Insertion Loss

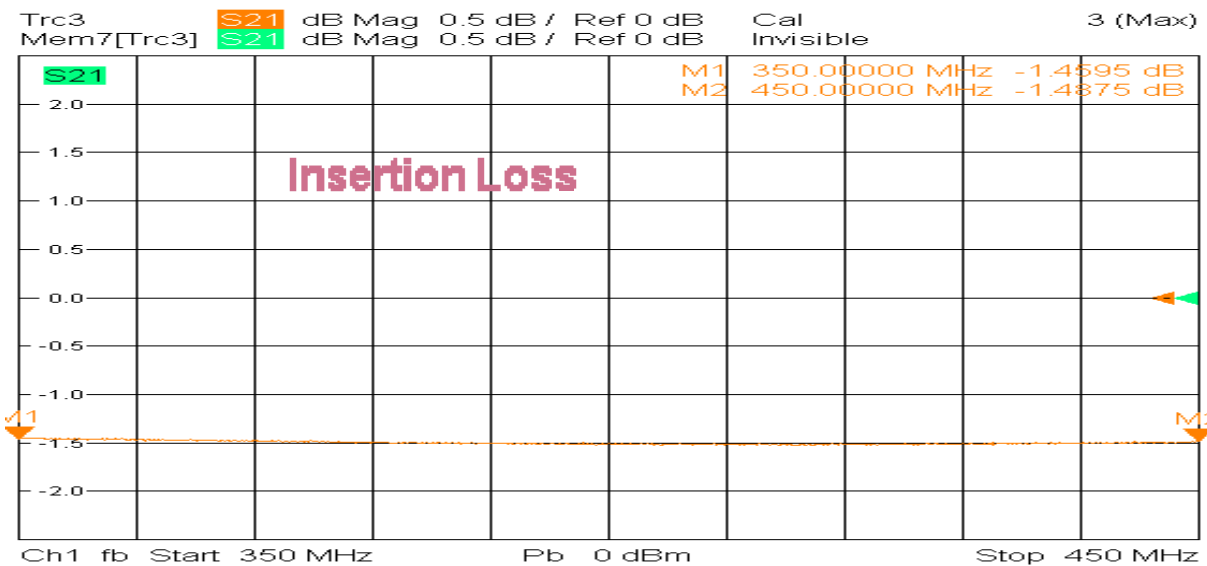

7/18/2018, 9:33 AM

