


Model TDC80160A10

Features

Low VSWR
High Directivity
Broadband & Miniature Size

Technical Data Sheet			
Frequency Range	8~16GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.7dB (Excl. Coupling Loss 0.46dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤10±0.5dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±0.4dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥12dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.50:1 Secondary ≤1.50:1	Operating Temperature	-55~+85°C
¹ Power Handling	Incident ≤50Watt; Reflected ≤2Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	20g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

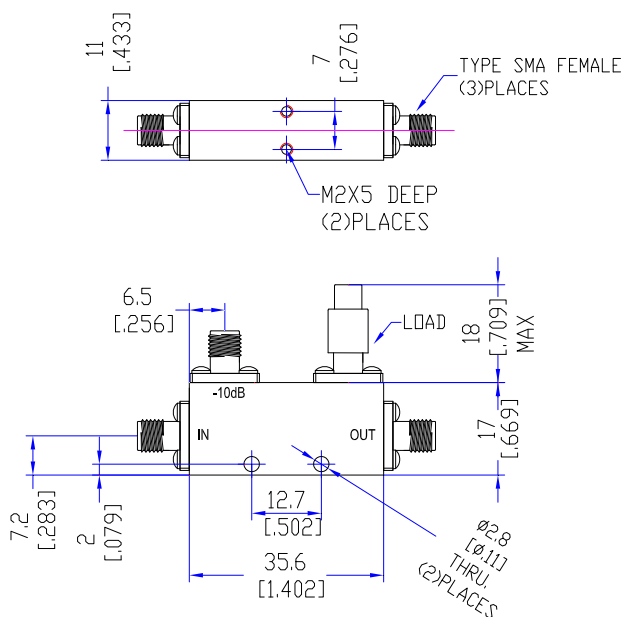


Typical Performance


1. Coupling Factor & Sensitivity, Isolation, VSWR




Trc1 **S11** SWR 100 mU/ Ref1 U Cal int
 Mem5[Trc1] **S21** SWR 100 mU/ Ref1 U Invisib

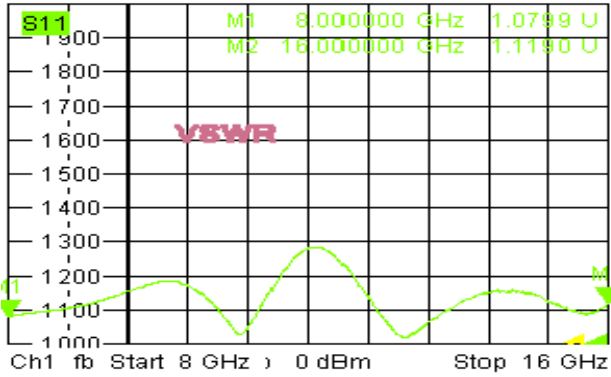


Trc2 **S21** dB Mag 5 dB / Ref-22 dB
 Mem6[Trc2] **S21** dB Mag 5 dB / Ref-22 dB

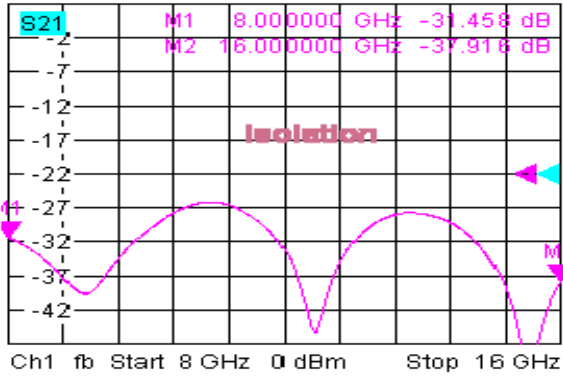

Trc3 **S21** dB Mag 0.4 dB / Ref-10.18 dB
 Mem7[Trc3] **S21** dB Mag 0.4 dB / Ref-10.18 dB

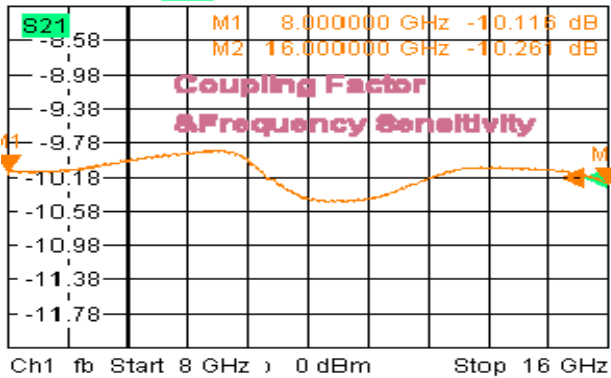

Trc4 **S22** SWR 100 mU/ Ref1 U Cal int 4

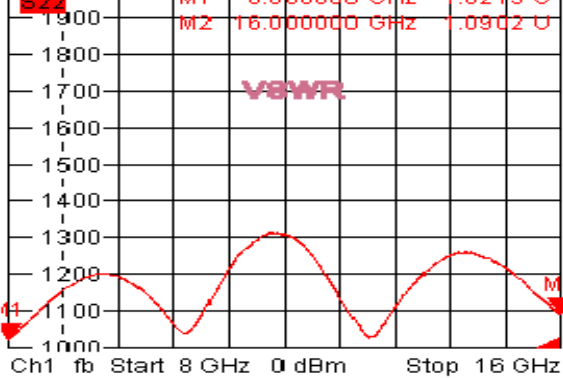


8/17/2018, 4:21 PM

2. Insertion Loss



Trc3 **S21** dB Mag 0.4 dB / Ref-1.16 dB Cal int 3 (Max)
 Mem7[Trc3] **S21** dB Mag 0.4 dB / Ref-1.16 dB Invisib

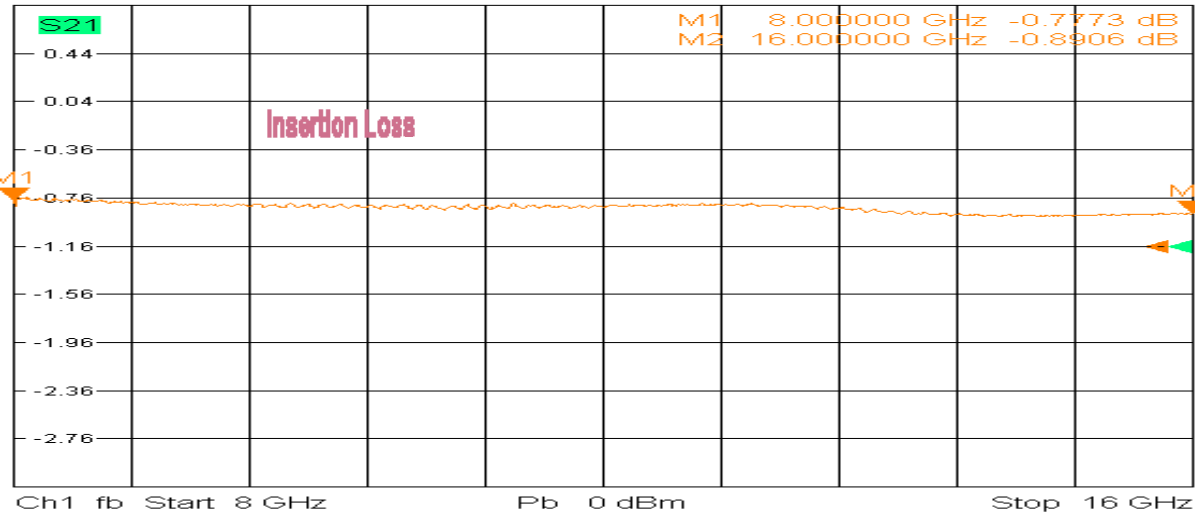

8/17/2018, 4:34 PM

