


Model TPD3135A32M

Features

Excellent phase& amplitude balance
 Low Insertion Loss& VSWR
 High Isolation


Technical Data Sheet			
Frequency Range	3.1~3.5GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤1.6dB (Above 15.05dB Split)	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.60:1 Output ≤1.30:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥20dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.7dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±7°	Operating Temperature	-55~+85°C
¹ Power Handling	Forward ≤30Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	1100g
Port Connectors	Input: SMA-Male Output: SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

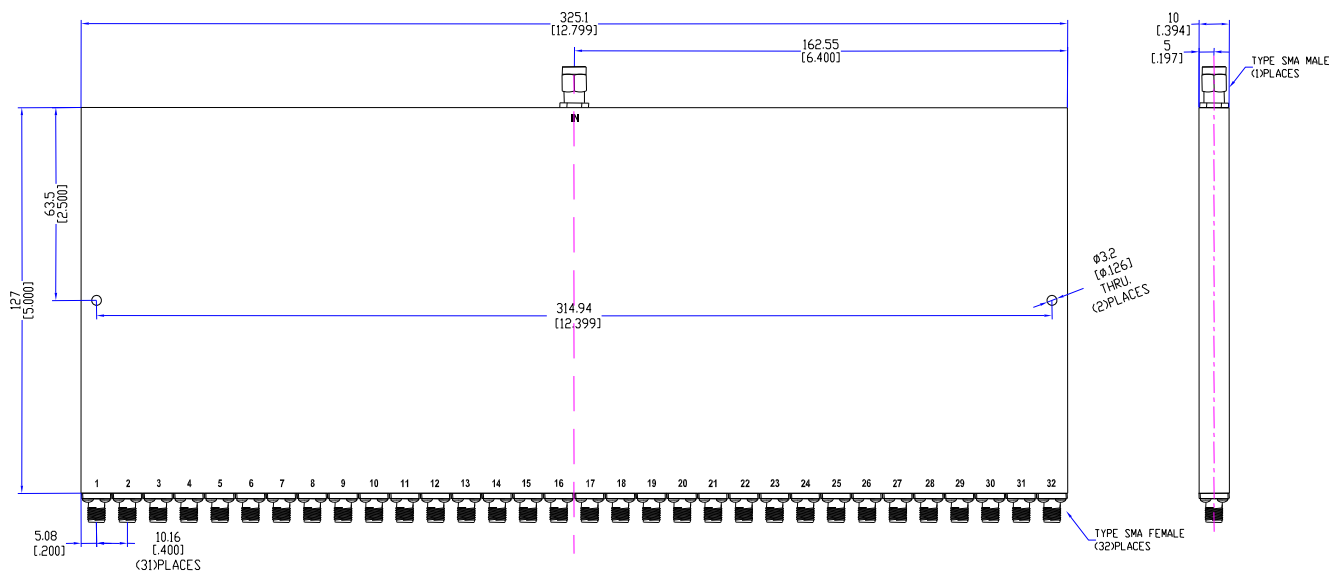

Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR

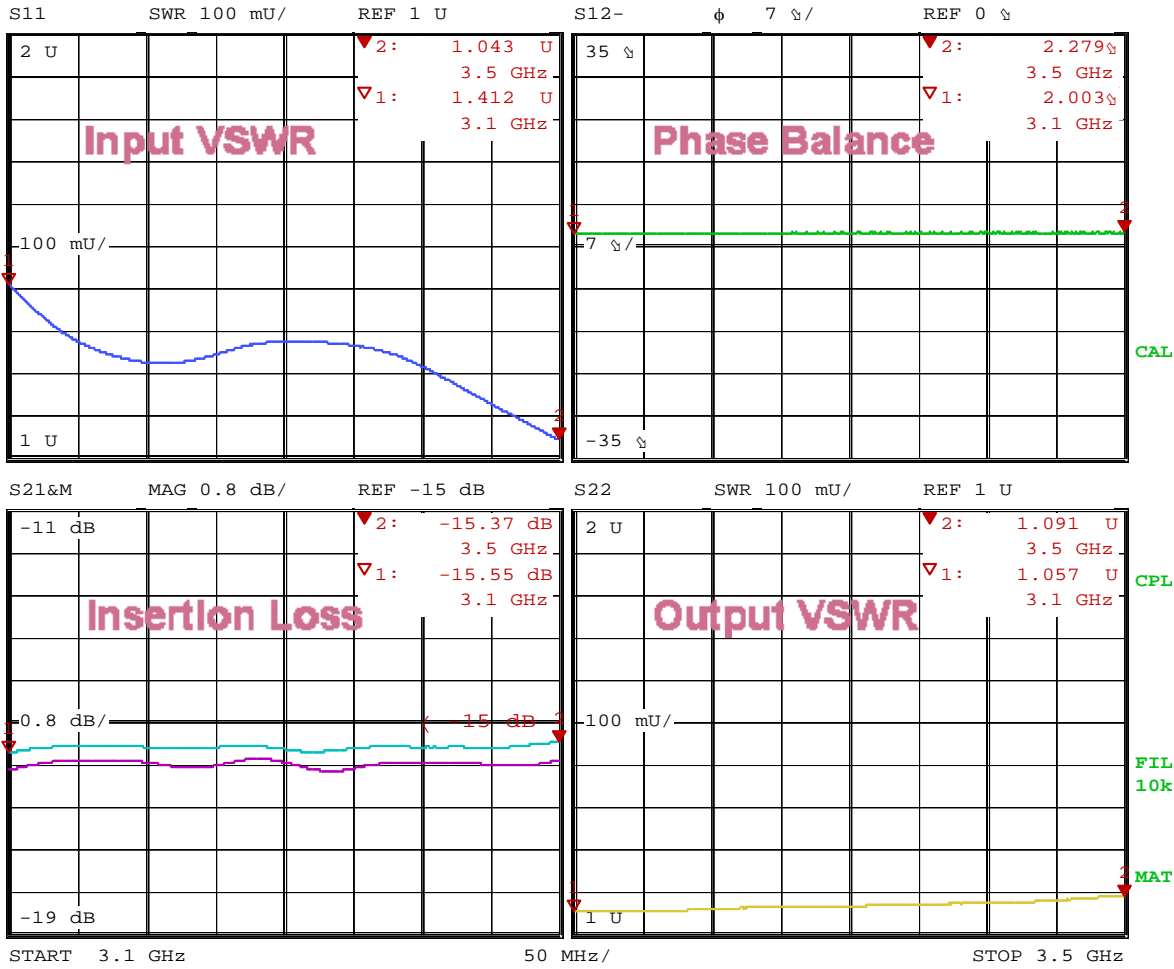

Date: 17.MAY.17 10:14:13

2. Isolation

