

Model TBF190221AB

Electrical Specifications


| | |
|-----------------|--------------------------------|
| Frequency Range | 9.5~9.7GHz |
| Insertion Loss | ≤1.50dB |
| VSWR | ≤1.30:1 |
| Rejection | ≤35dB@DC~9.3GHz & 9.9GHz~14GHz |
| Power Handling | ≤5Watt |
| Impedance | 50Ω |
| Port Connectors | SMA-Female |
| Finish | Painted Blue_ RAL #5007 |
| Weight | 30g |

Environmental Parameters

Operating Temperature -25~+65°C

Operating Humidity Up to 90%,Non- Condensing

Outline Drawing

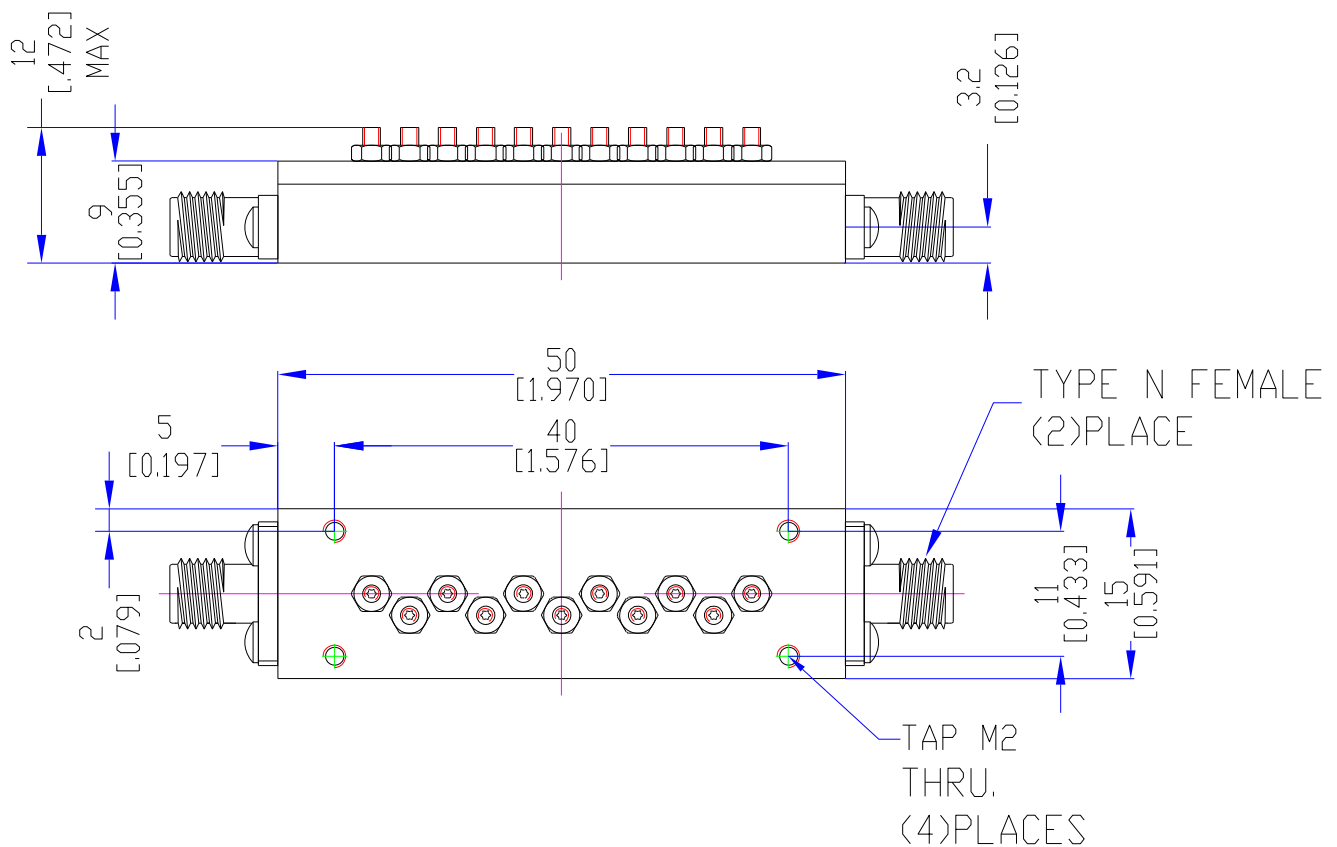

Typical Performance

