

Model TBF190221AC

Electrical Specifications


Frequency Range	9.26~9.46GHz
Insertion Loss	≤1.50dB
VSWR	≤1.30:1
Rejection	≤35dB@DC~9.06GHz & 9.66GHz~14GHz
Power Handling	≤5Watt
Impedance	50Ω
Port Connectors	SMA-Female
Finish	Painted Blue_ RAL #5007
Weight	30g

Environmental Parameters

Operating Temperature -25~+65°C

Operating Humidity Up to 90%,Non- Condensing

Outline Drawing

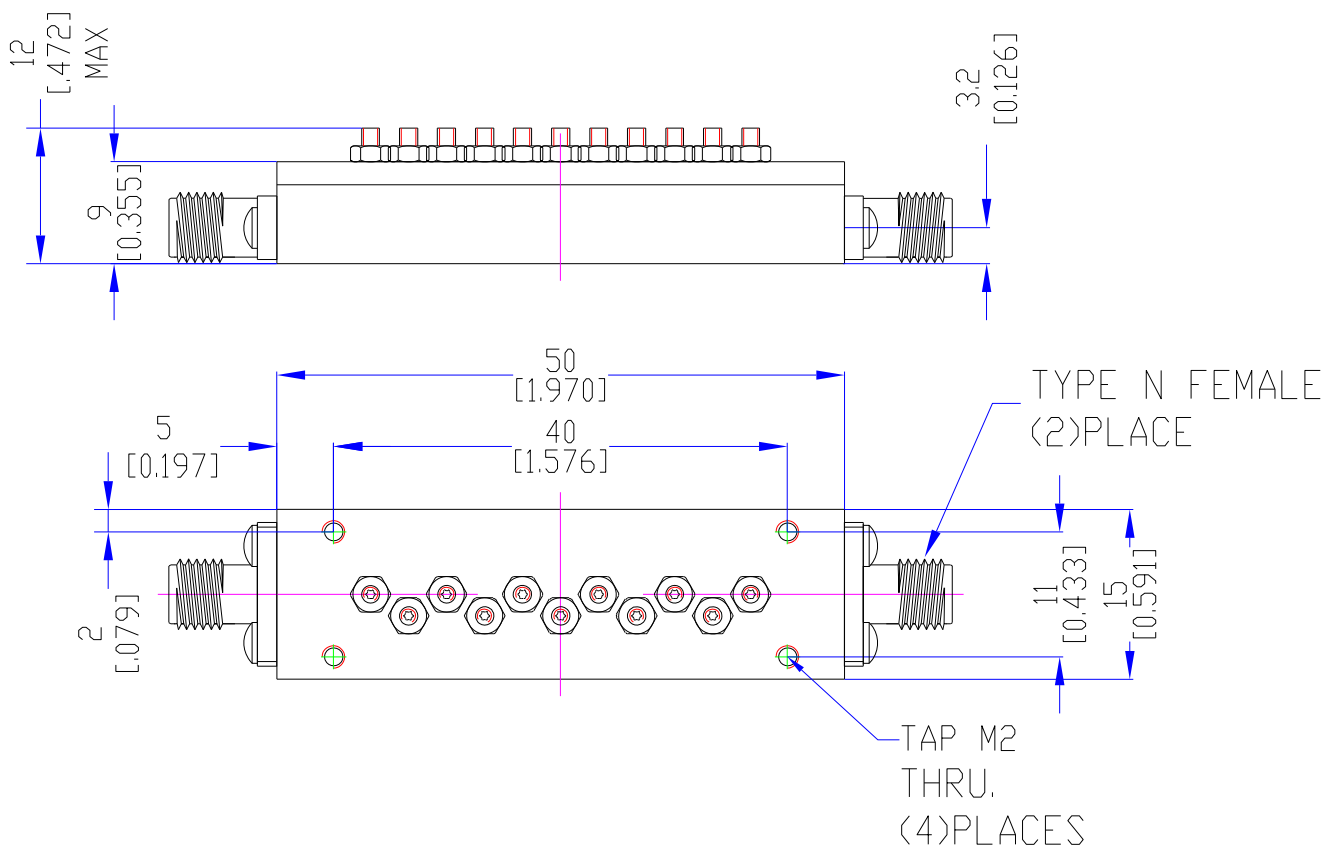

Typical Performance

