


Model TPD05265A4

Features

Excellent phase& amplitude balance
Low Insertion Loss& VSWR
High Isolation


Technical Data Sheet			
Frequency Range	0.5~26.5GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤5.80dB (Above 6.02dB Split)	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.90:1 Output ≤1.80:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥16dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±1.0dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±10°	Operating Temperature	-55~+85℃
¹ Power Handling	Forward ≤20Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Weight	330g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

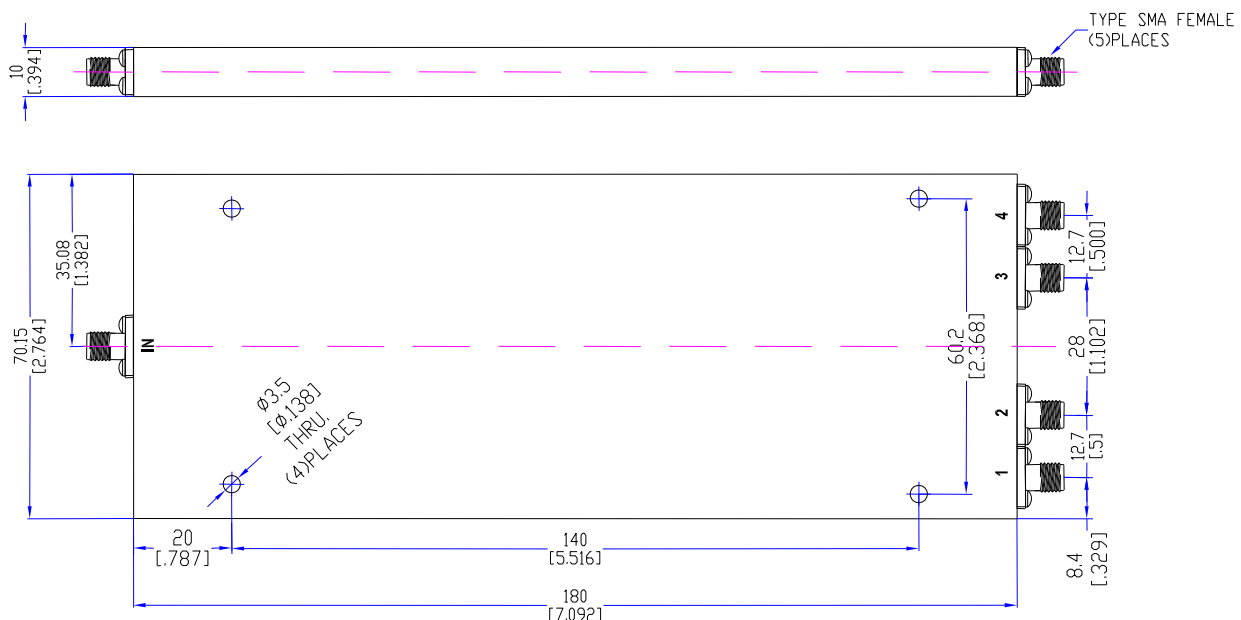


Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR

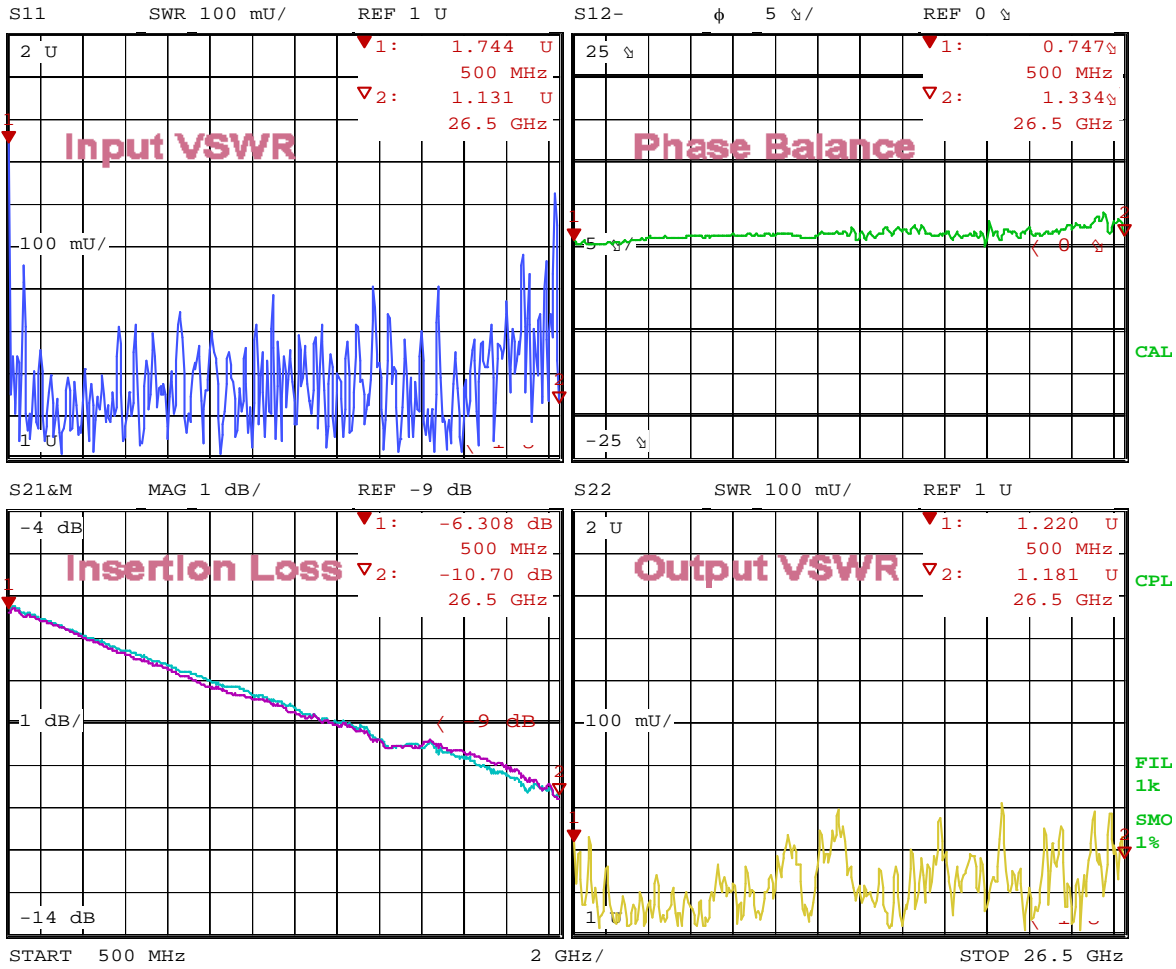

Date: 14.NOV.19 15:20:56

2. Insertion Loss

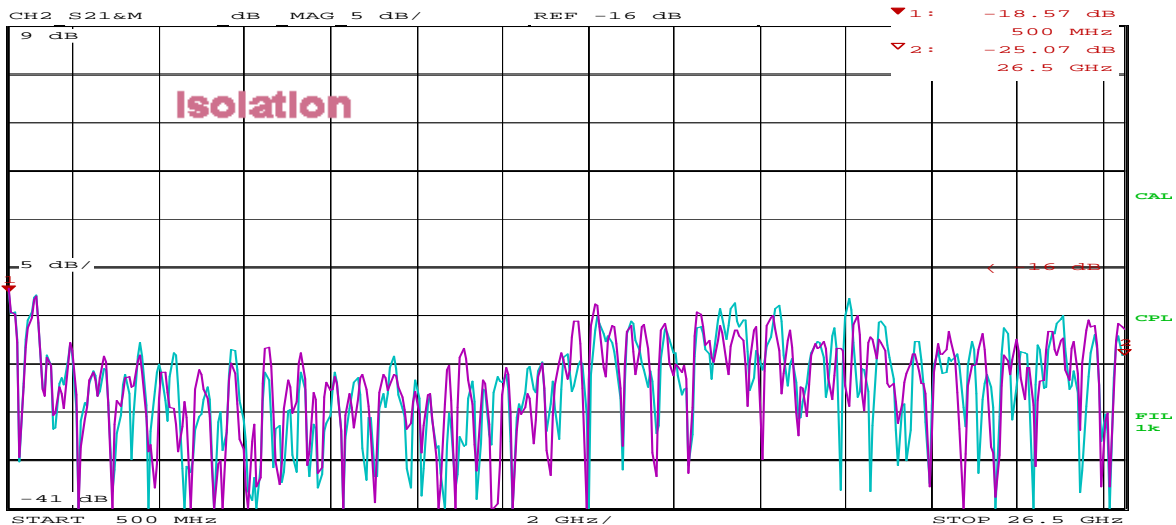

Date: 14.NOV.19 15:25:09

