


Model THC2060N

Features

Excellent phase & amplitude balance
Low Insertion Loss & VSWR
High Isolation

Technical Data Sheet			
Frequency Range	2~6GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤0.8dB	Housing	Aluminum, 6061 T6
Isolation	≥18dB		Clear Chem Conversion Film
Amplitude Balance	≤±0.5dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±5°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.35:1	Operating Temperature	-55~+85°C
¹ Power Handling	Average ≤50Watt Peak ≤3KW	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	150g
Port Connectors	N-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

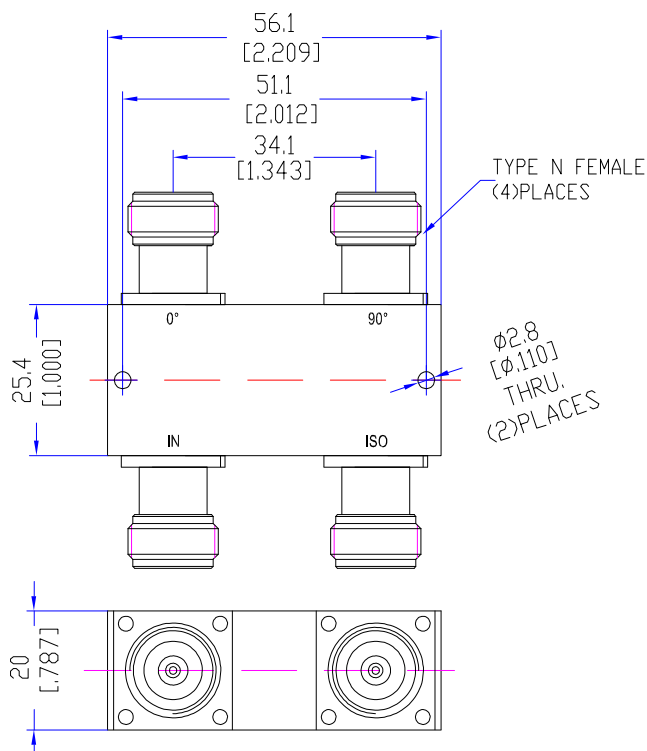


Typical Performance


1. Insertion Loss, Amplitude & Phase Balance, VSWR




Trc1 **S11** SWR 100 mU/ Ref 1 U Cal
Mem5[Trc1] **S11** SWR 100 mU/ Ref 1 U Invisi

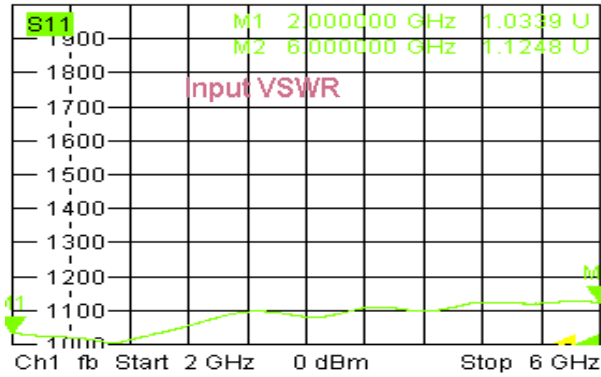


Trc2 **S21** Phase 5° / Ref 90° Cal Mal
Mem6[Trc2] **S21** Phase 5° / Ref 90° Invisibl

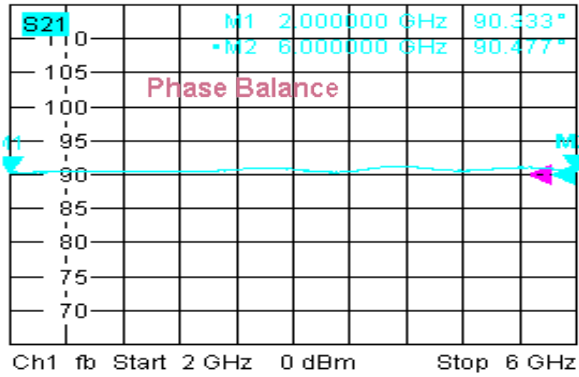

Trc3 **S21** dB Mag 0.5 dB / Ref -3 dB Ca
Mem7[Trc3] **S21** dB Mag 0.5 dB / Ref -3 dB

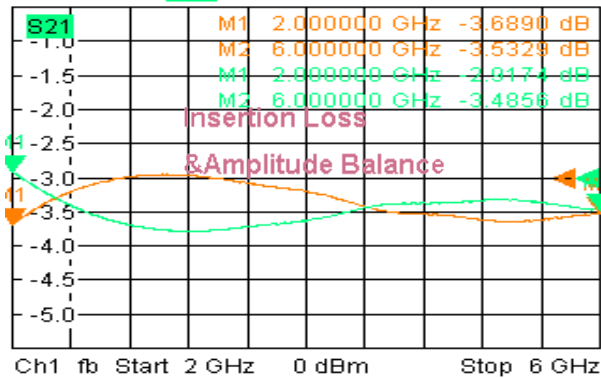

Trc4 **S22** SWR 100 mU/ Ref 1 U Cal
Mem8[Trc4] **S22** SWR 100 mU/ Ref 1 U Invi

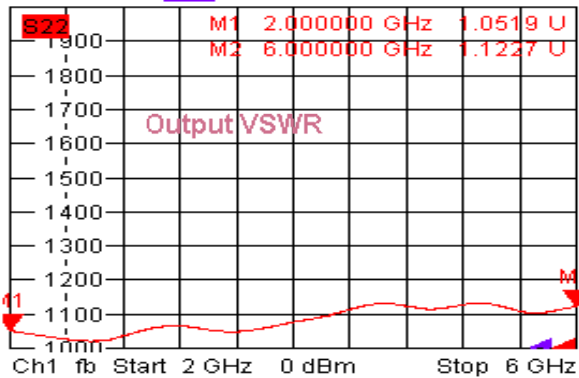


6/21/2019, 11:17 PM



Typical Performance

2. Insertion Loss, Amplitude & Phase Balance, VSWR

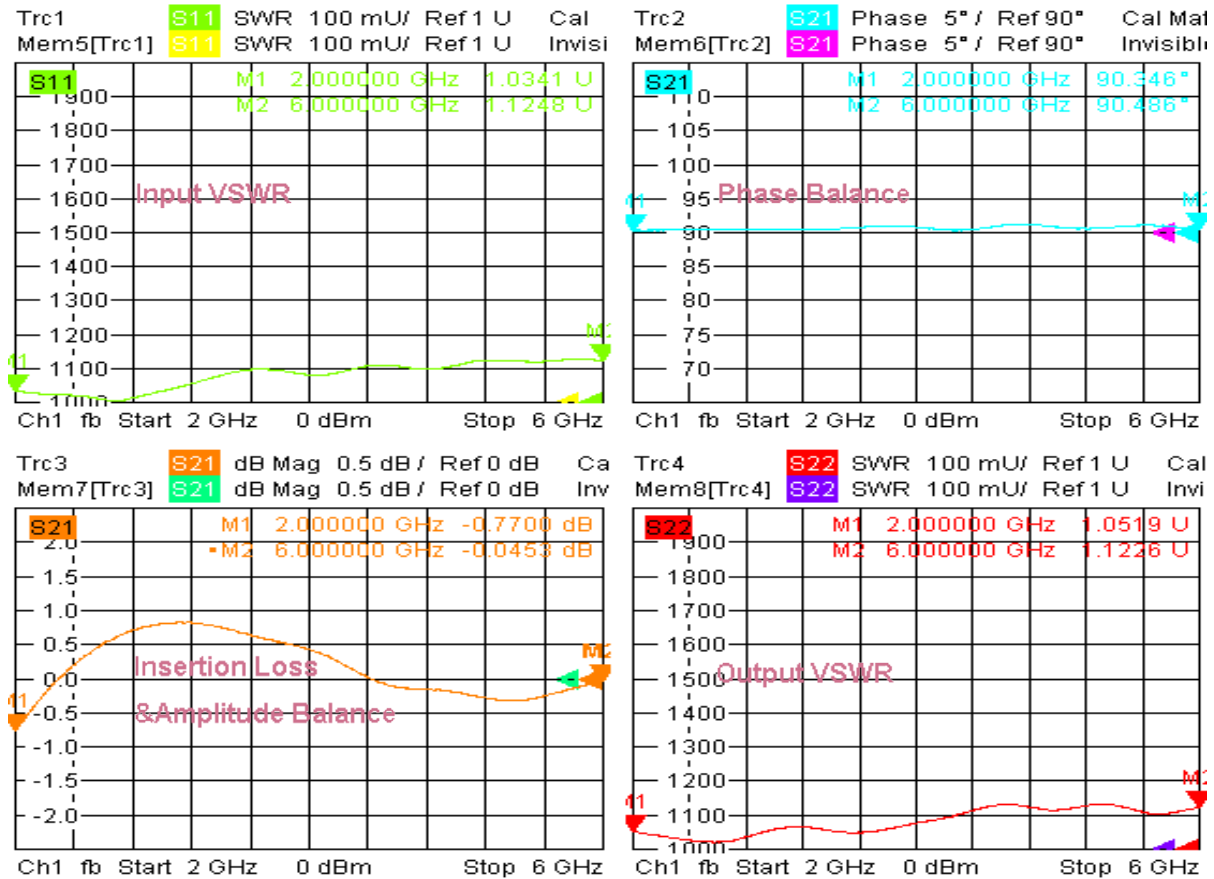

3. Isolation

