


## Model TPD2080A4A

### Features

Excellent phase & amplitude balance  
 Low Insertion Loss & VSWR  
 High Isolation


Technical Data Sheet			
Frequency Range	2~8GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤1.0dB (Above 6.02dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.35:1 Output ≤1.30:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥20dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.5dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±5°	Operating Temperature	-55~+85°C
Ripple	≤0.2dB@2.5-3.5GHz ≤0.3dB@4.5-5.5GHz	Operating Humidity	Up to 95%, Non-Condensing
<sup>1</sup> Power Handling	Forward ≤30Watt; Reversed ≤1Watt	Port Connectors	SMA-Female
Impedance	50Ω	Weight	70g

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

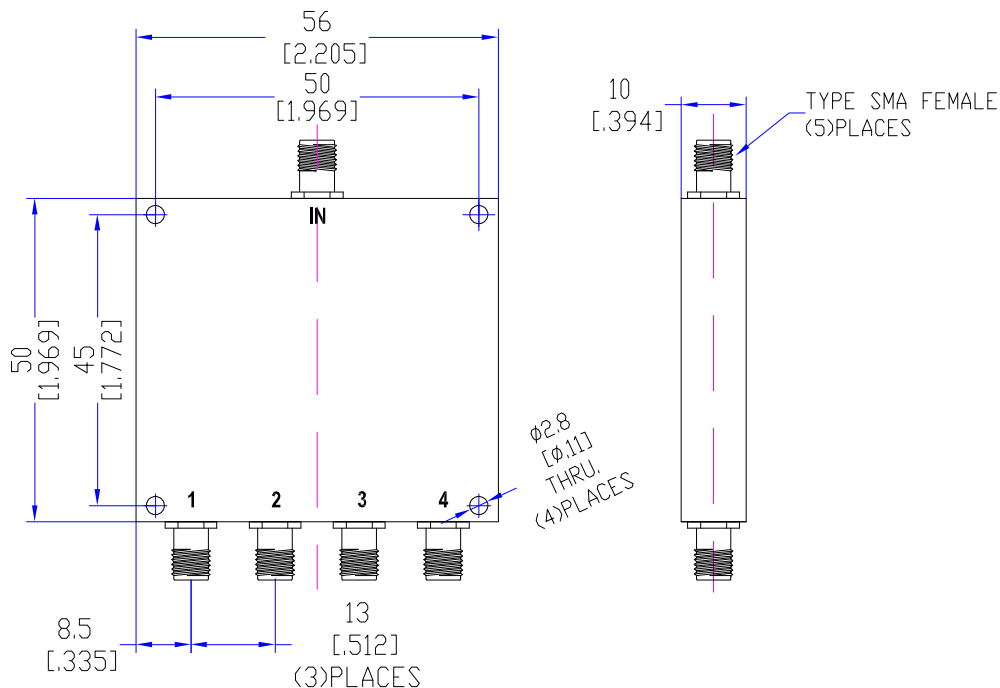

## Typical Performance

### 1. Insertion Loss, Amplitude &Phase Balance, VSWR

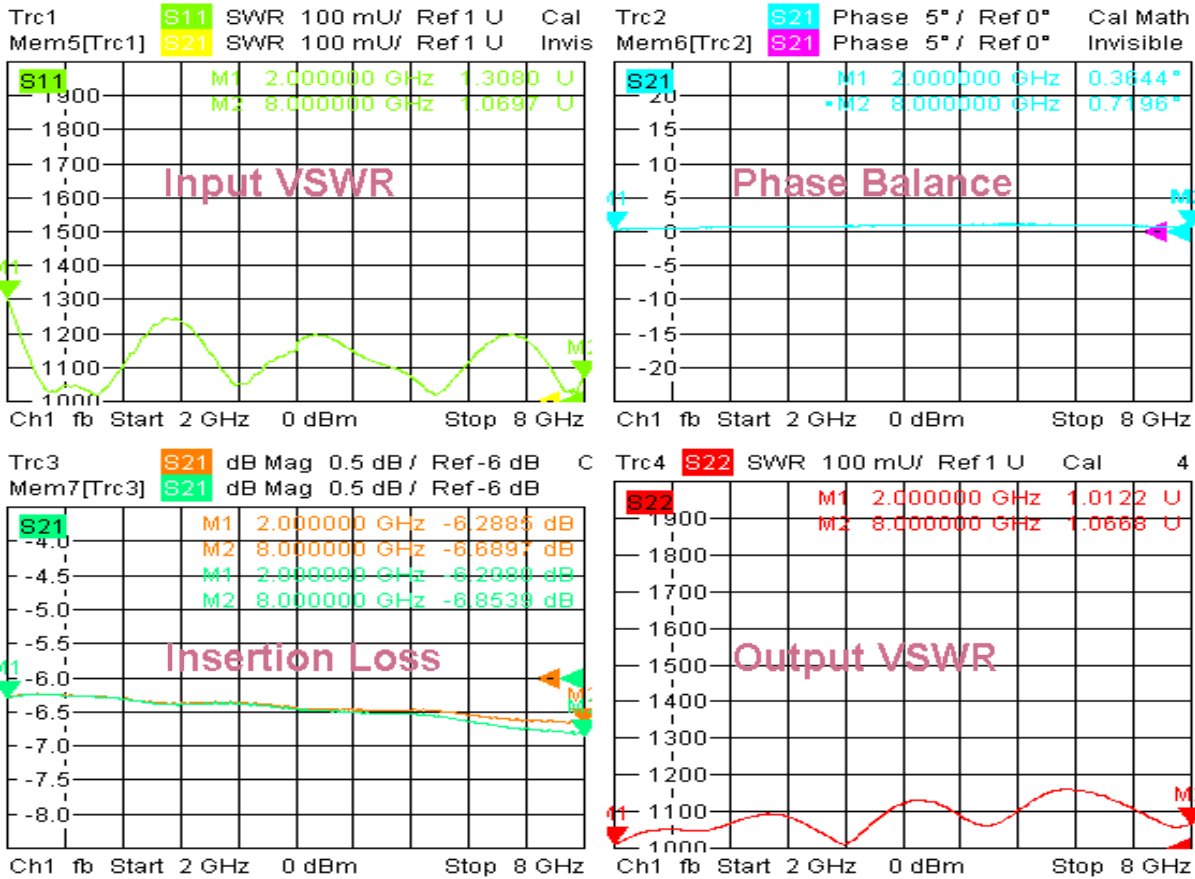

### 2. Isolation

