


Model TDC0380A20

Features

Low VSWR
High Directivity
Broadband & Miniature Size

Technical Data Sheet			
Frequency Range	0.3~8GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.8dB (Excl. Coupling Loss 0.04dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤20±1.0dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±1.2dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥12dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.30:1 Secondary ≤1.30:1	Operating Temperature	-55~+85°C
¹ Power Handling	Incident ≤50Watt; Reflected ≤2Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	110g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

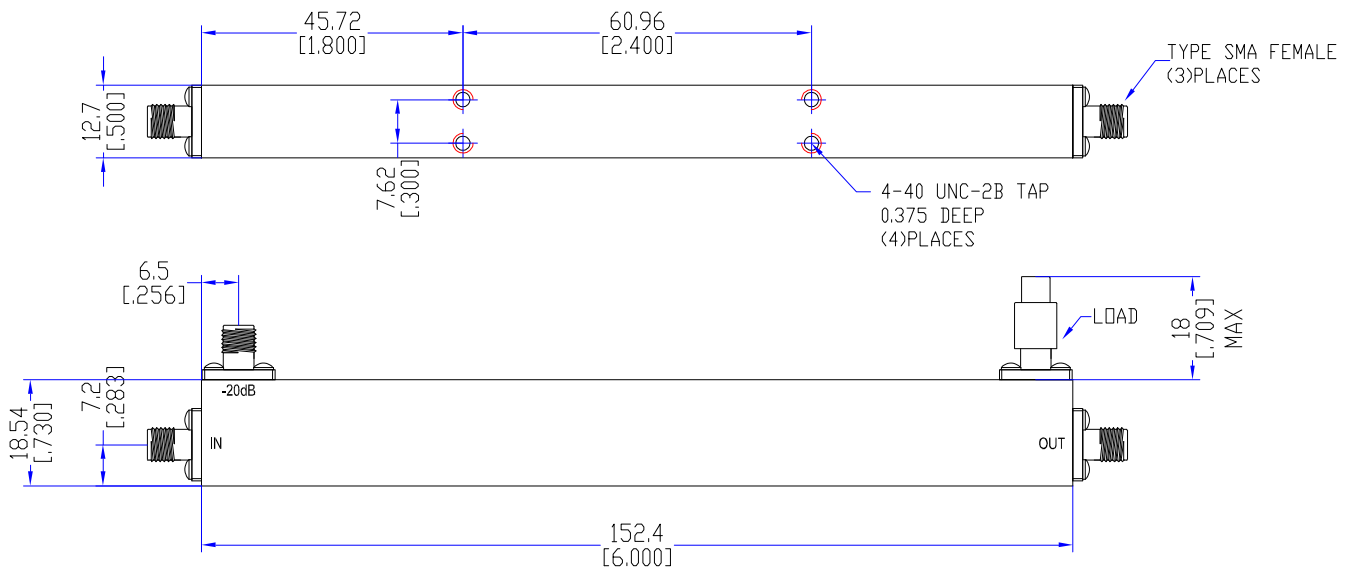


Typical Performance


1. Coupling Factor & Sensitivity, Isolation, VSWR




Trc1 **S11** SWR 200 mU/ Ref 1 U Cal
Mem5[Trc1] **S21** SWR 200 mU/ Ref 1 U Invisib

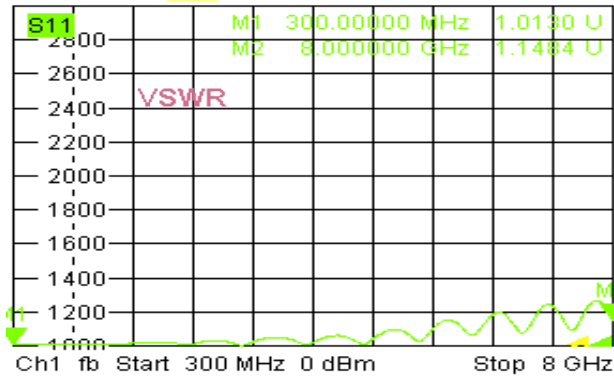


Trc2 **S21** dB Mag 10 dB / Ref -32 dB
Mem6[Trc2] **S21** dB Mag 10 dB / Ref -32 dB

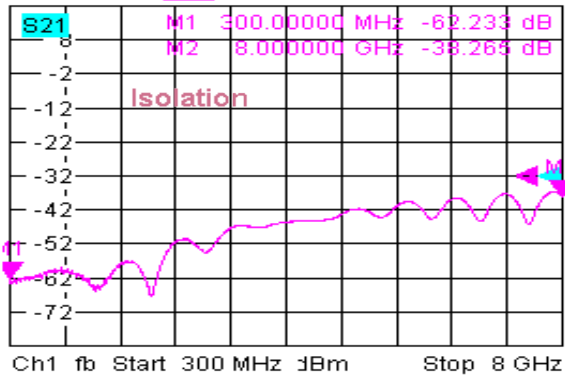

Trc3 **S21** dB Mag 1.2 dB / Ref -20.9 dB
Mem7[Trc3] **S21** dB Mag 1.2 dB / Ref -20.9 dB

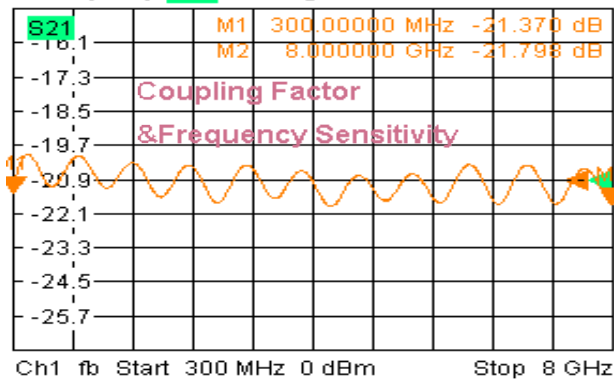

Trc4 **S22** SWR 100 mU/ Ref 1 U Cal 4

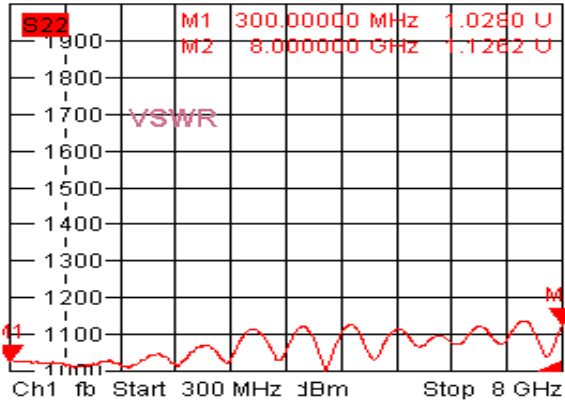


6/5/2019, 5:35 AM

2. Insertion Loss



Trc3 **S21** dB Mag 0.6 dB / Ref -0.04 dB Cal 3 (Max)
Mem7[Trc3] **S21** dB Mag 0.6 dB / Ref -0.04 dB Invisib

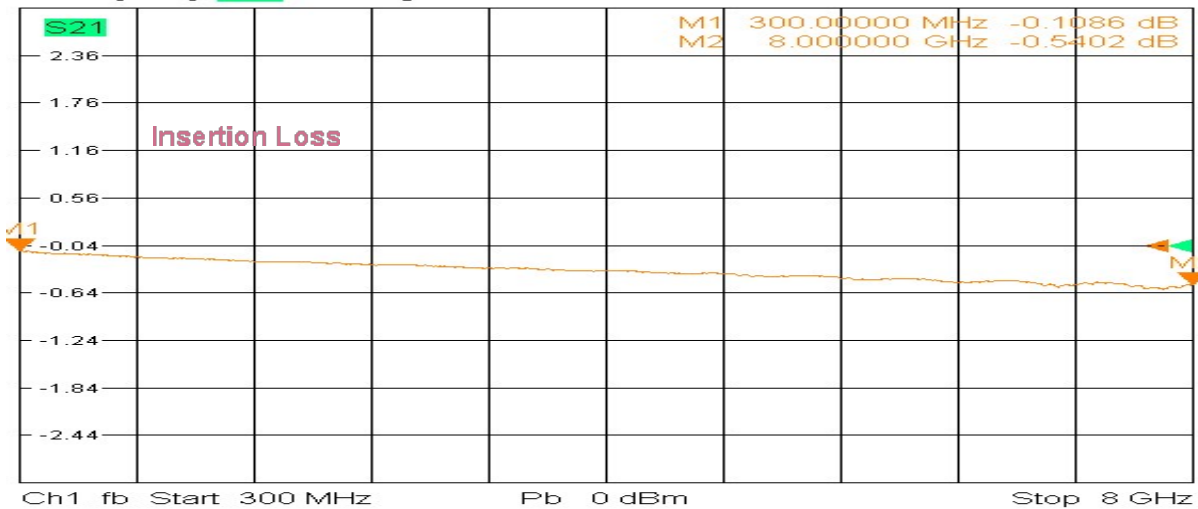

6/5/2019, 5:33 AM

