


Model TPD0722N4A

Features

Excellent phase & amplitude balance
 Low Insertion Loss & VSWR
 High Isolation


Technical Data Sheet			
Frequency Range	7000~2200MHz	Finish	Natural oxygen
Insertion Loss	≤0.8dB (Above 6.02dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.30:1 Output ≤1.20:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥21dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.25dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±2.5°	Operating Temperature	-40~+85°C
¹ Power Handling	Forward ≤30Watt; Rev. ≤2Watt Per Port	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	610g
Port Connectors	N-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

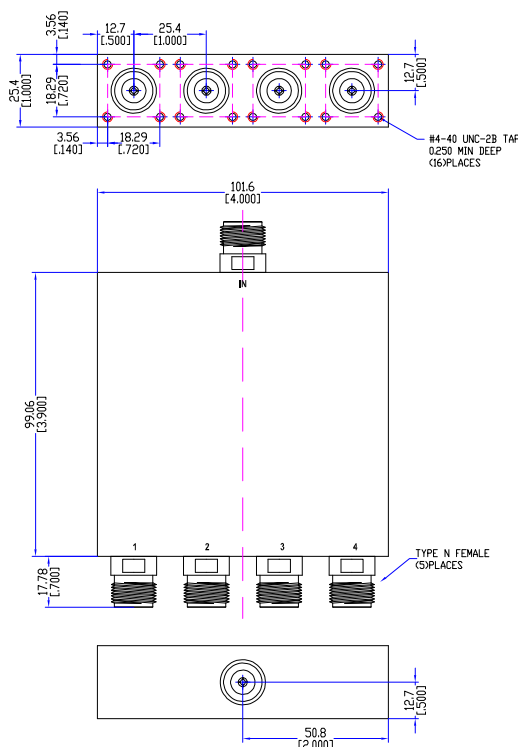


Typical Performance

1. Insertion Loss, Amplitude &Phase Balance, VSWR

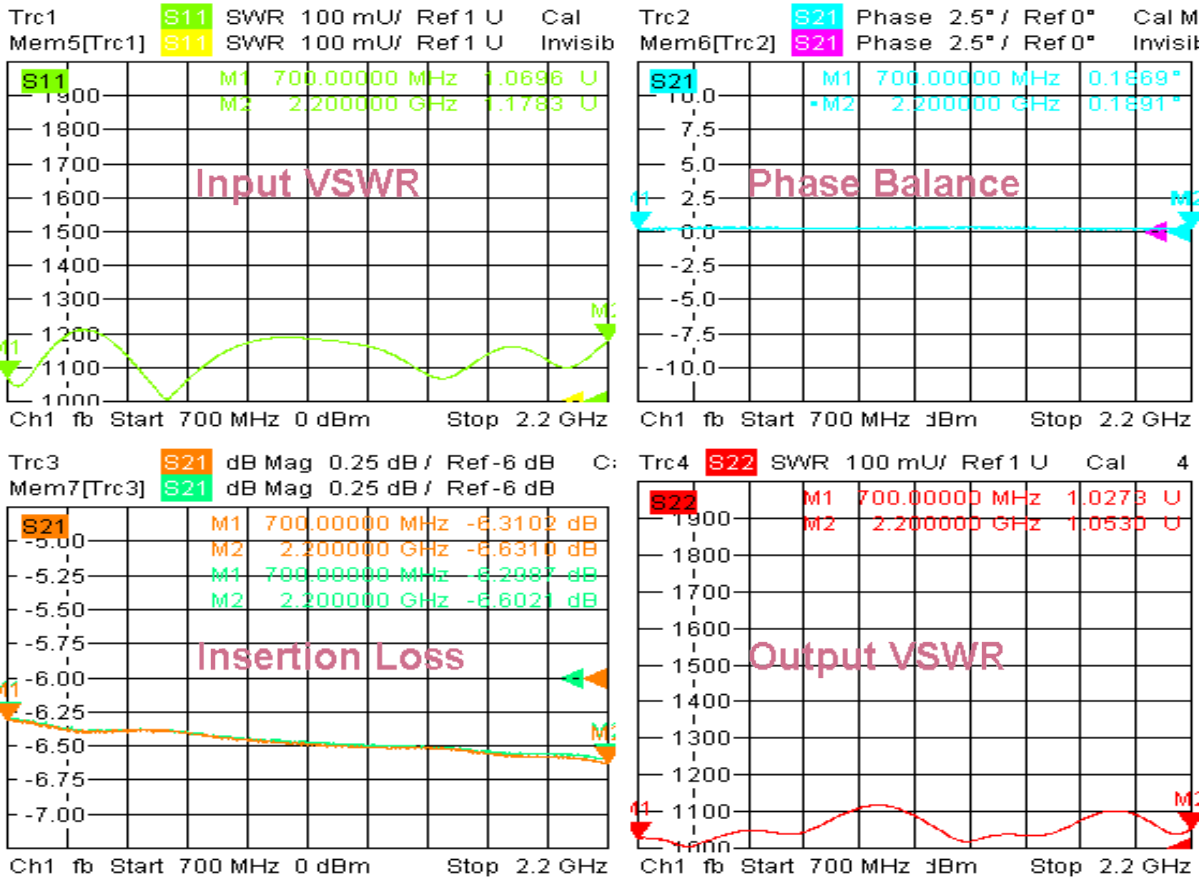

8/15/2020, 3:49 PM

2. Isolation

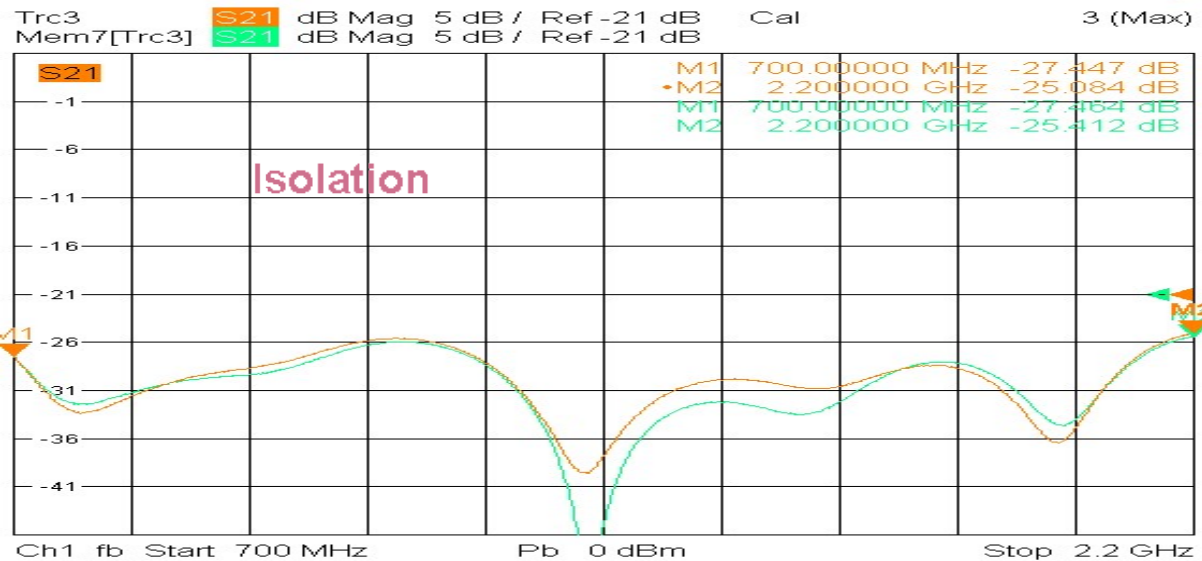

8/15/2020, 3:32 PM

