


## Model THC20180B

### Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation

Technical Data Sheet			
Frequency Range	2~18GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤2.8dB	Housing	Aluminum, 6061 T6
Isolation	≥18dB		Clear Chem Conversion Film
Amplitude Balance	≤±0.8dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±14°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.60:1	Operating Temperature	-55~+85°C
<sup>1</sup> Power Handling	Average ≤50Watt Peak ≤1KW	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	110g
Port Connectors	SMA-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

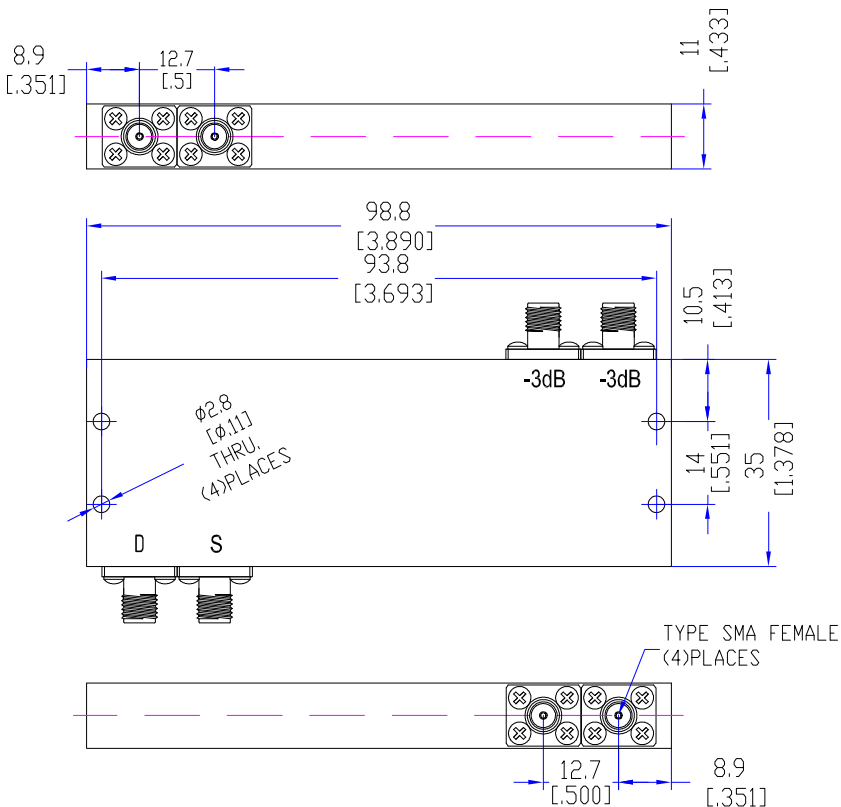


## Typical Performance


### 1. Insertion Loss, Amplitude & Phase Balance, VSWR<sub>in</sub> 0°




Trc1 **S11** SWR 100 mU/ Ref 1 U Cal  
Mem5[Trc1] **S21** SWR 100 mU/ Ref 1 U Invisi

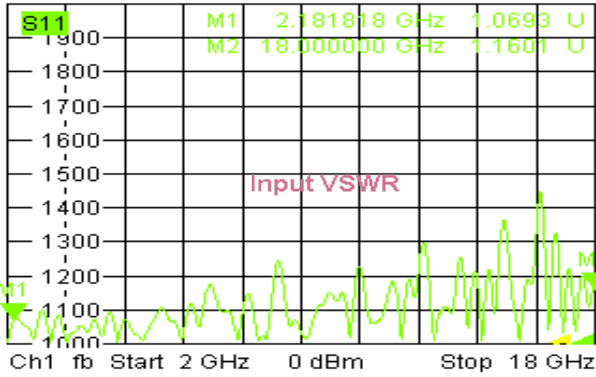


Trc2 **S21** Phase unwrap 7° / Ref 0° Cal  
Mem6[Trc2] **S21** Phase unwrap 7° / Ref 0° Invisi

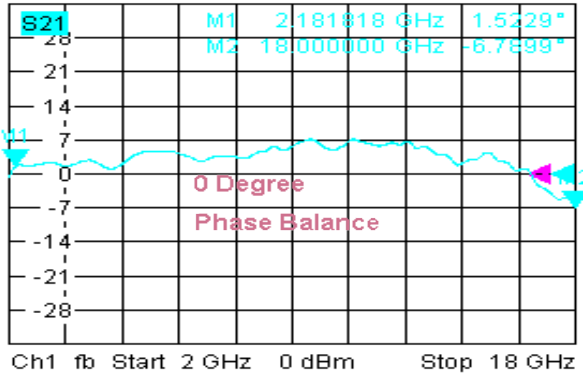

Trc3 **S21** dB Mag 0.8 dB / Ref -3 dB Cal  
Mem7[Trc3] **S21** dB Mag 0.8 dB / Ref -3 dB Invisi

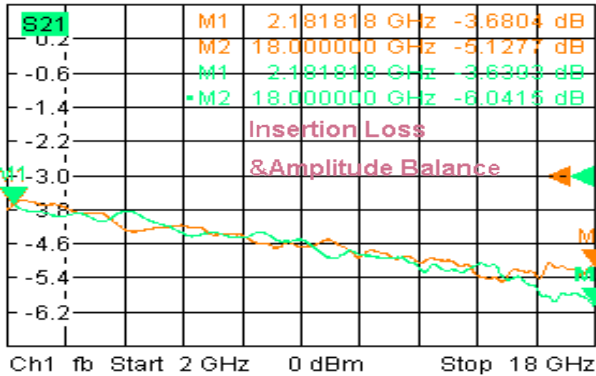

Trc4 **S22** SWR 100 mU/ Ref 1 U Cal  
Mem8[Trc4] **S22** SWR 100 mU/ Ref 1 U Invisi

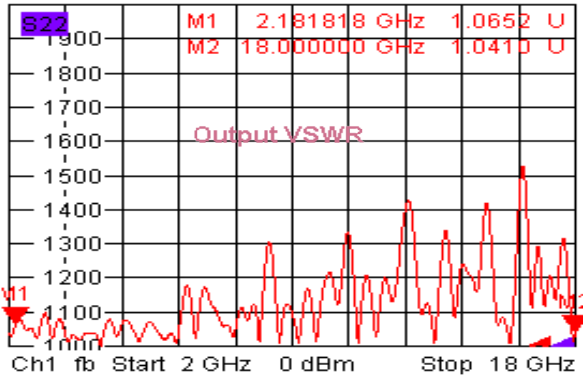


9/26/2018, 5:56 PM



## Typical Performance

### 2. Insertion Loss, Amplitude & Phase Balance, VSWR \_ 180°

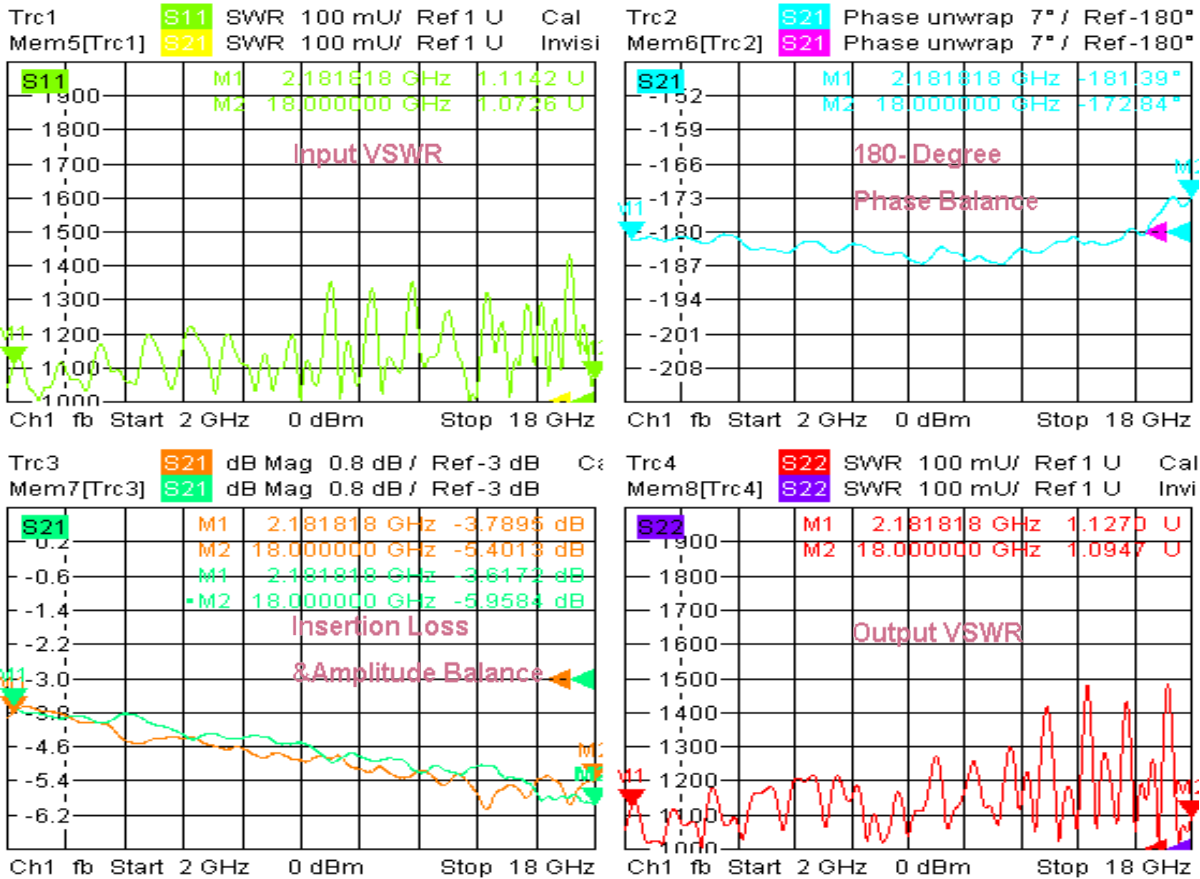

### 3. Isolation

