


Model TDC1020A20B

Features

Low VSWR
High Directivity
Broadband & Miniature Size





| Technical Data Sheet | | | |
|-----------------------------|--|-----------------------|---|
| Frequency Range | 1~2GHz | Finish | Painted Blue_ RAL #5007 |
| Insertion Loss | ≤0.2dB (Excl. Coupling Loss 0.04dB) | Connector Body | Passivated Stainless Steel |
| Coupling Factor | ≤20±0.5dB | Housing | Aluminum, 6061 T6 Clear Chem Conversion Film |
| Coupling Sensitivity | ≤±0.75dB | Connector Pin | Beryllium Copper, Gold Plate |
| Directivity | ≥24dB | Solder | Lead Free, RoHS Compliant |
| VSWR | Primary ≤1.15:1 Secondary ≤1.15:1 | Operating Temperature | -55~+85°C |
| ¹ Power Handling | Incident ≤50Watt; Reflected ≤50Watt | Operating Humidity | Up to 95%, Non- Condensing |
| Impedance | 50Ω | Weight | 30g |
| Port Connectors | SMA-Female | | |

¹Power Handling guaranteed when load's VSWR within 1.50:1.

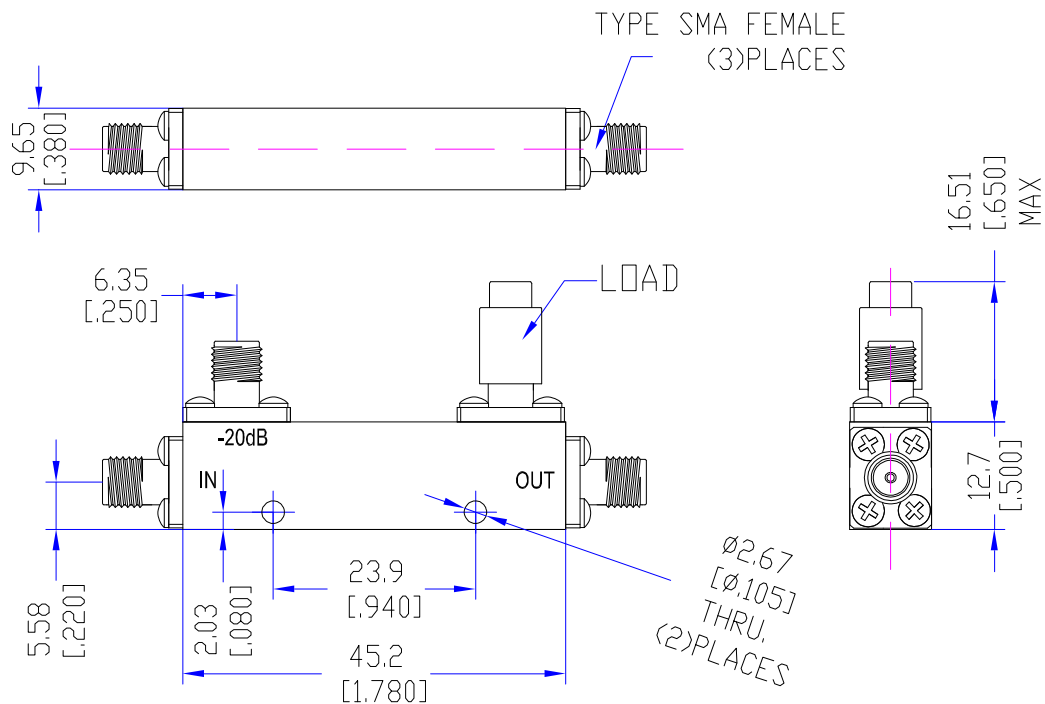


Typical Performance

1. Coupling Factor & Sensitivity, Isolation, VSWR

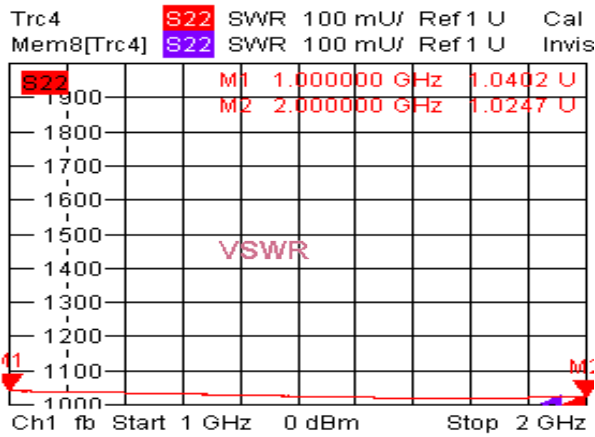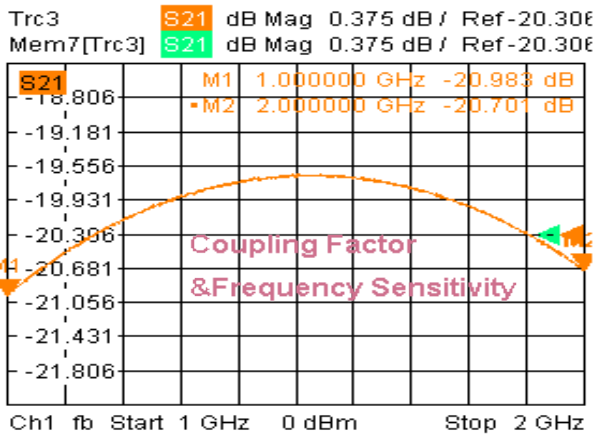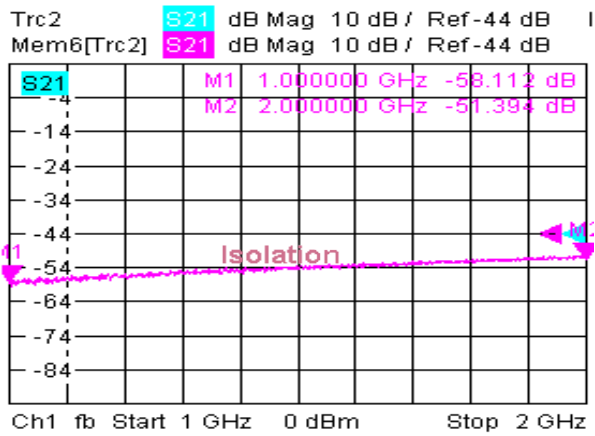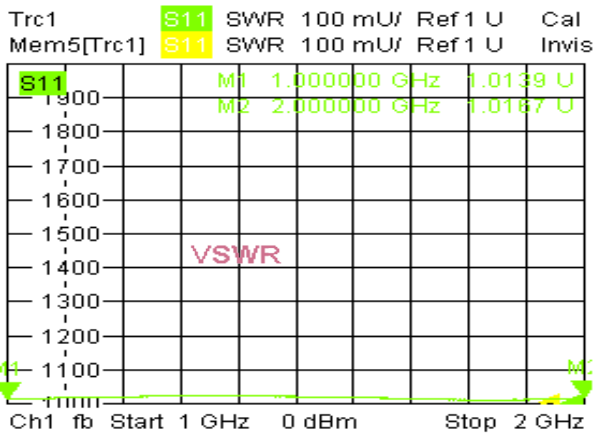

2/1/2021, 10:09 AM

2. Insertion Loss

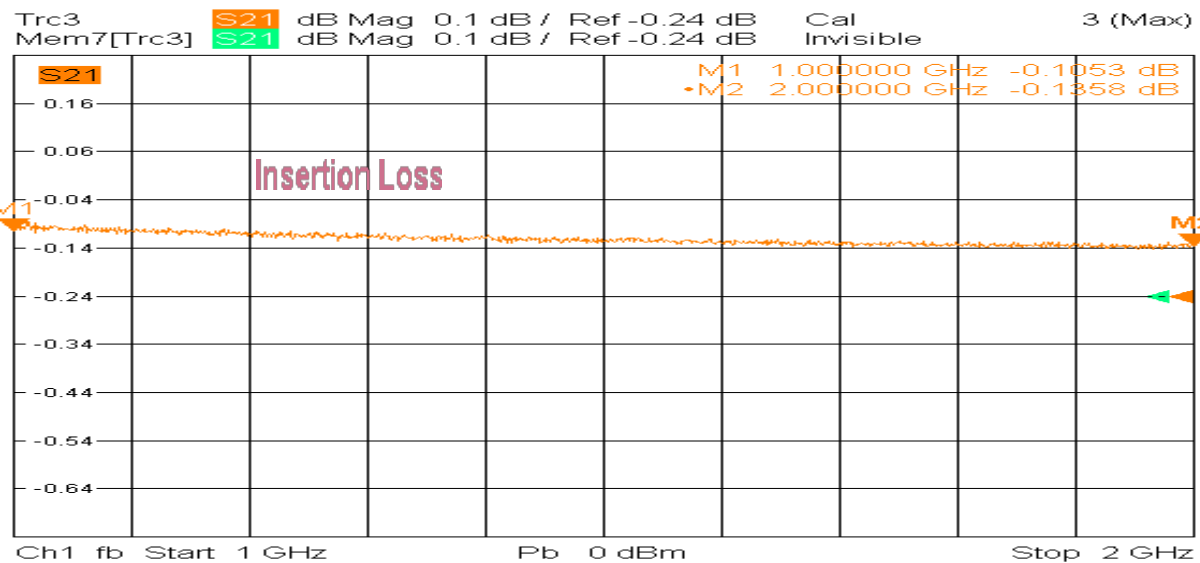

2/1/2021, 10:11 AM

