


## Model TPD04132A2

### Features

Excellent phase& amplitude balance  
Low Insertion Loss& VSWR  
High Isolation


Technical Data Sheet			
Frequency Range	0.4~13.2GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤1.6dB (Above 3.01dB Split)	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.60:1 Output ≤1.60:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥10dB@0.4-0.6GHz ≥15dB@0.6-13.2GHz	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.5dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±5°	Operating Temperature	-55~+85°C
Power Handling	Forward ≤10Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Weight	110g
Port Connectors	SMA-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

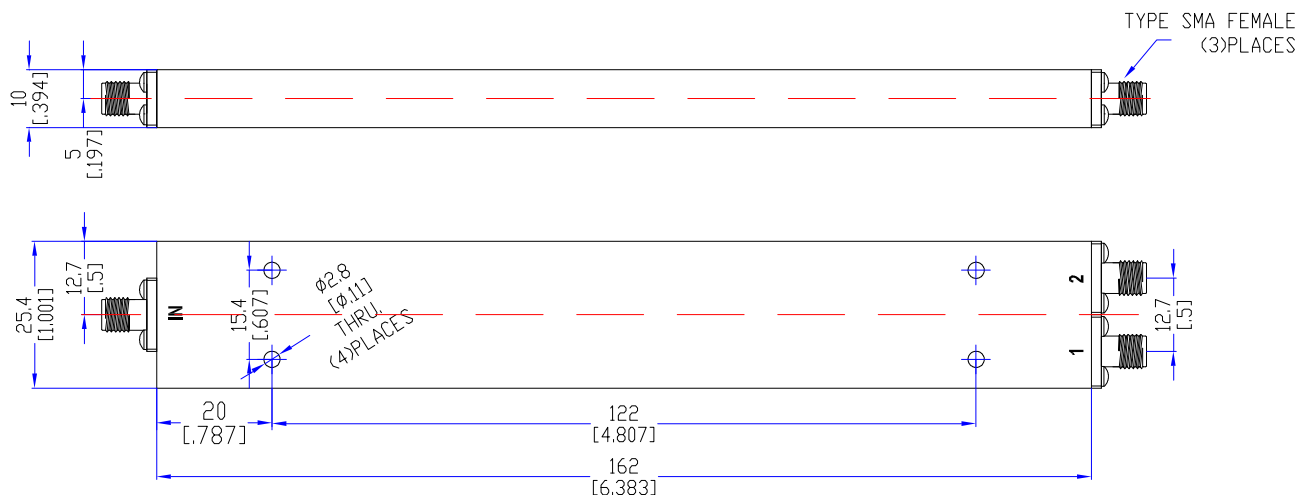


## Typical Performance

### 1. Insertion Loss, Amplitude &Phase Balance, VSWR

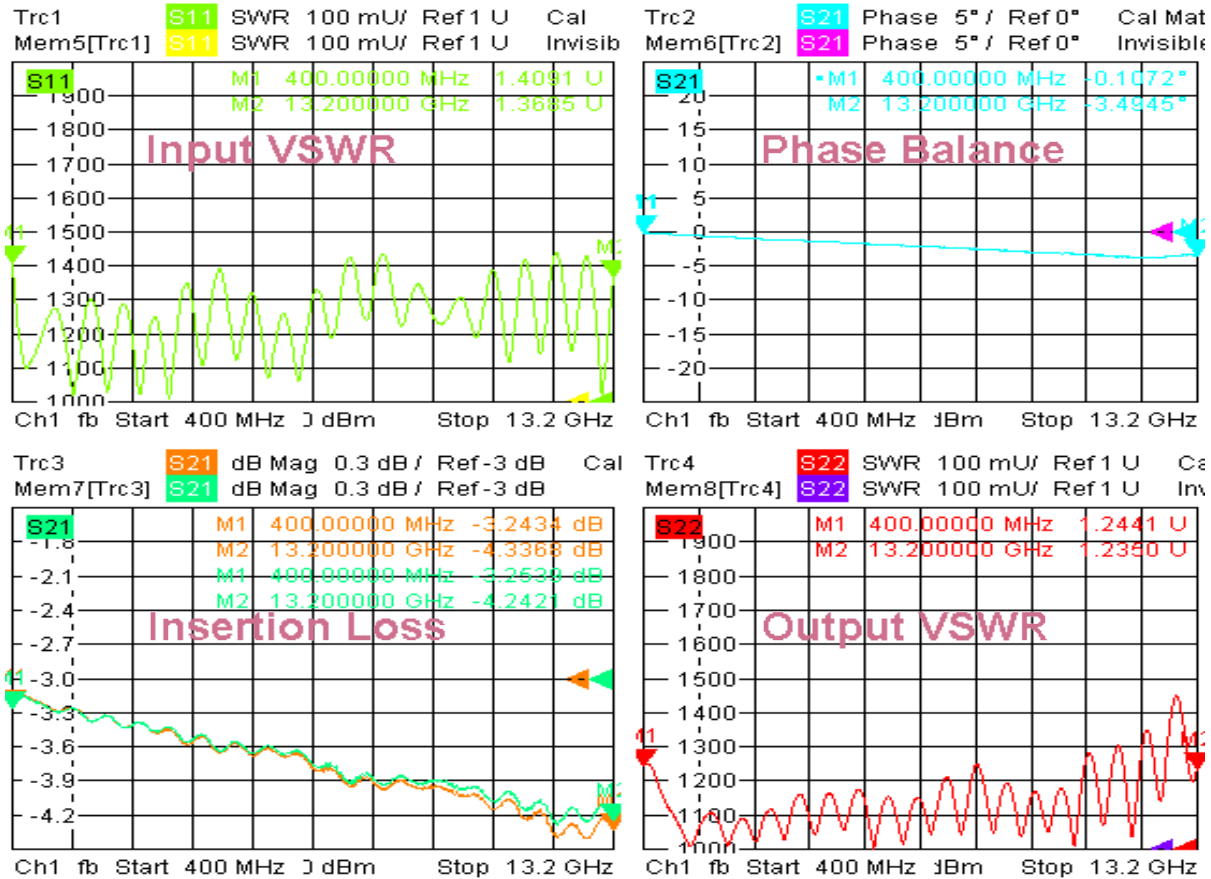

8/28/2018, 5:22 PM

### 2. Isolation

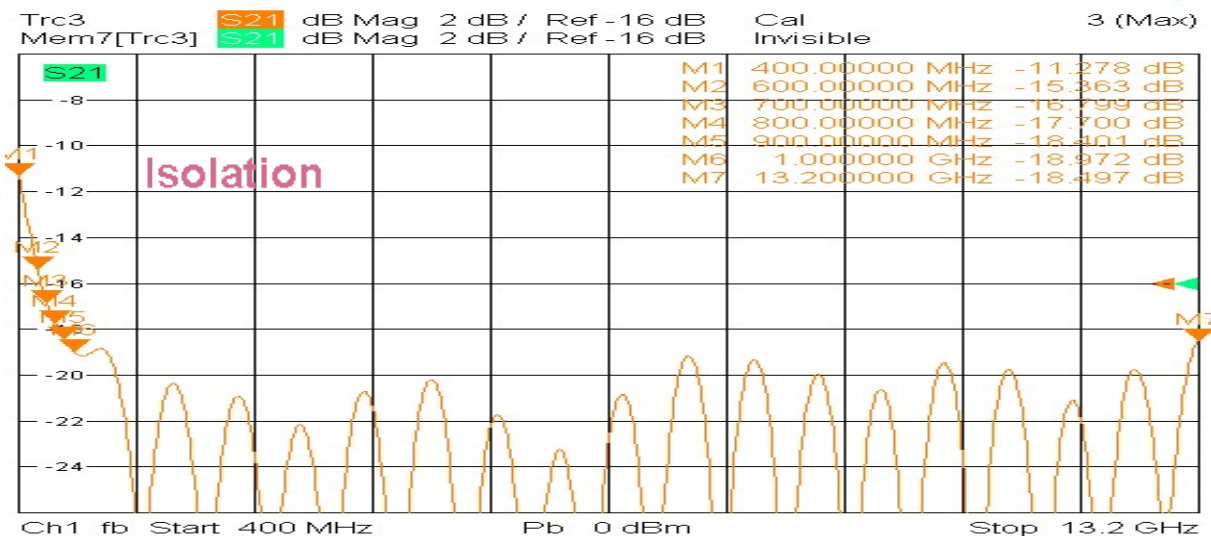

8/29/2018, 11:34 AM

