


Model TPD0921A4

Features

Excellent phase& amplitude balance
 Low Insertion Loss& VSWR
 High Isolation

Technical Data Sheet			
Frequency Range	950~2150MHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.6dB (Above 6.02dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.30:1 Output ≤1.20:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥27dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.3dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±3°	Operating Temperature	-55~+85°C
¹ Power Handling	Forward ≤30Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	90g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

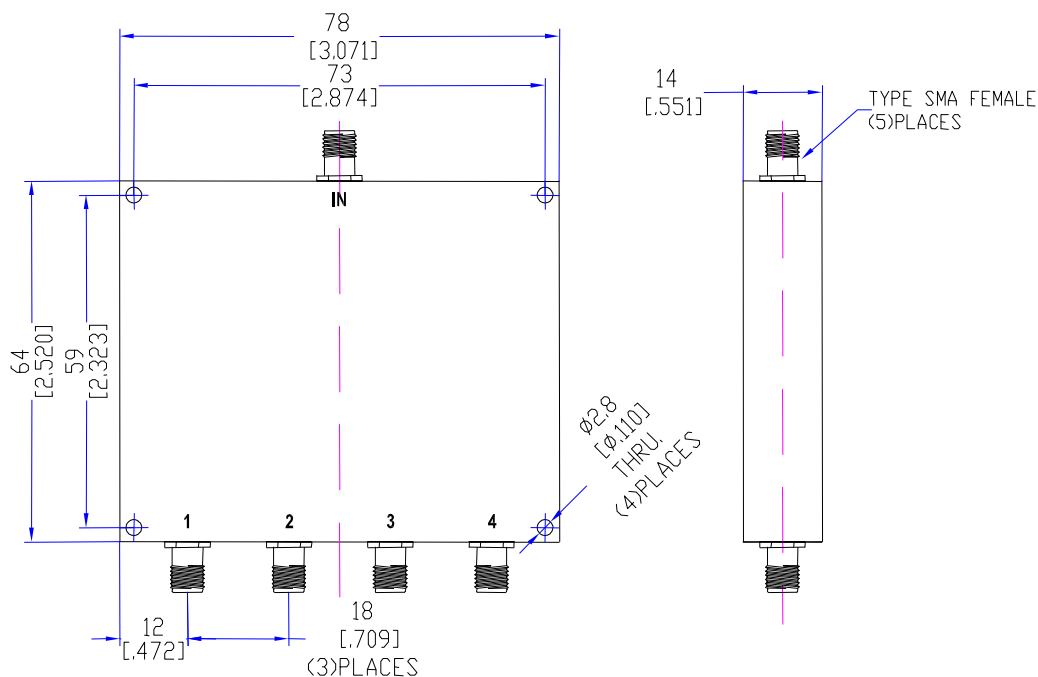


Typical Performance


1. Insertion Loss, Amplitude & Phase Balance, VSWR




Trc1 Mem5[Trc1] S11 SWR 100 mU/ Ref1 U Cal Invisib

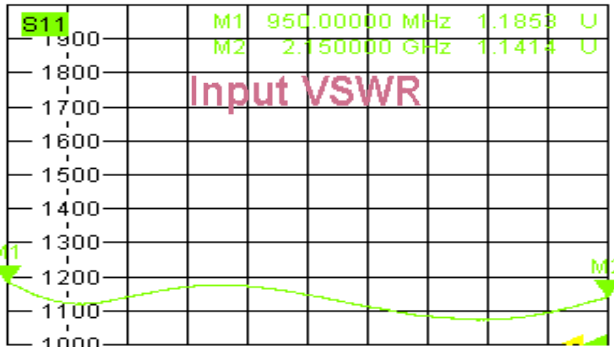


Trc2 Mem6[Trc2] S21 Phase 3° / Ref 0° Cal Mat Invisibl

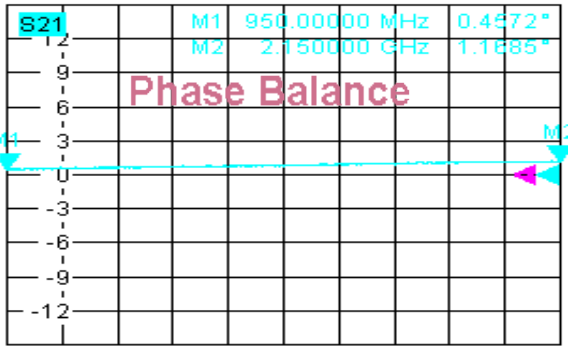

Trc3 Mem7[Trc3] S21 dB Mag 0.3 dB / Ref -6 dB Cal

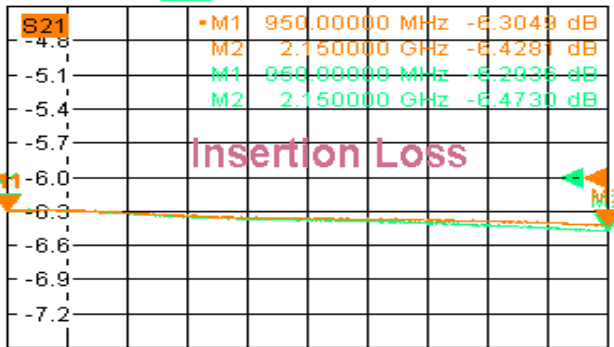

Trc4 S22 SWR 100 mU/ Ref1 U Cal 4

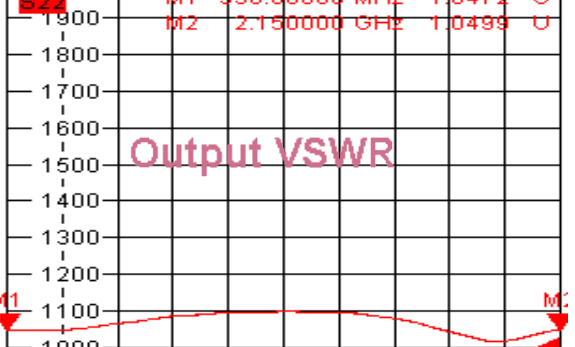


11/14/2020, 5:29 PM

2. Insertion Loss



Trc3 Mem7[Trc3] S21 dB Mag 5 dB / Ref -27 dB Cal 3 (Max)

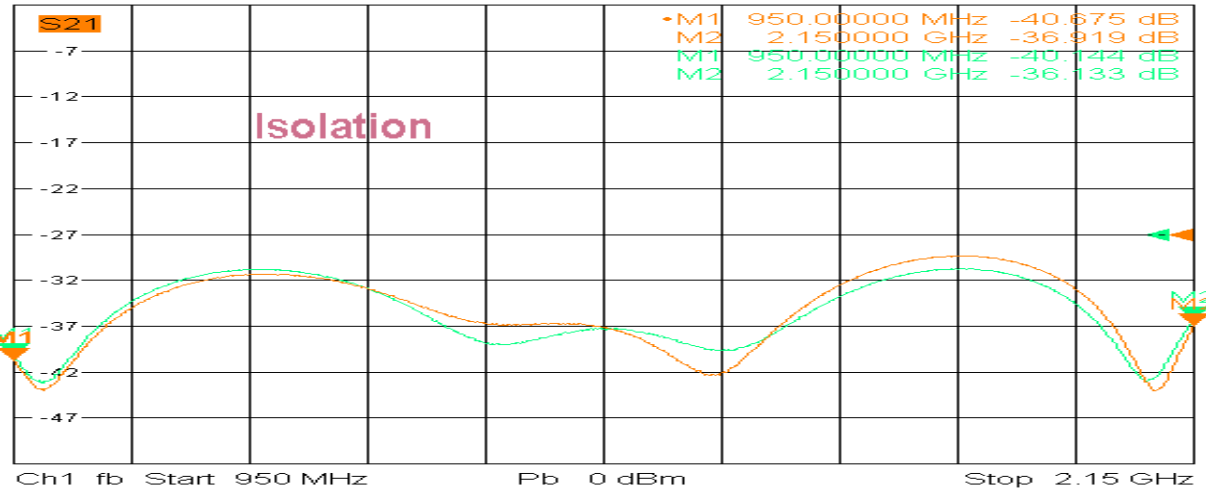

11/14/2020, 5:46 PM

