


Model TDC40180A10A

Features

Low VSWR
High Directivity
Broadband & Miniature Size

Technical Data Sheet			
Frequency Range	4~18GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.7dB (Excl. Coupling Loss 0.46dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤10±0.7dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±0.7dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥12dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.40:1 Secondary ≤1.40:1	Operating Temperature	-55~+85°C
¹ Power Handling	Incident ≤50Watt; Reflected ≤2Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	30g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

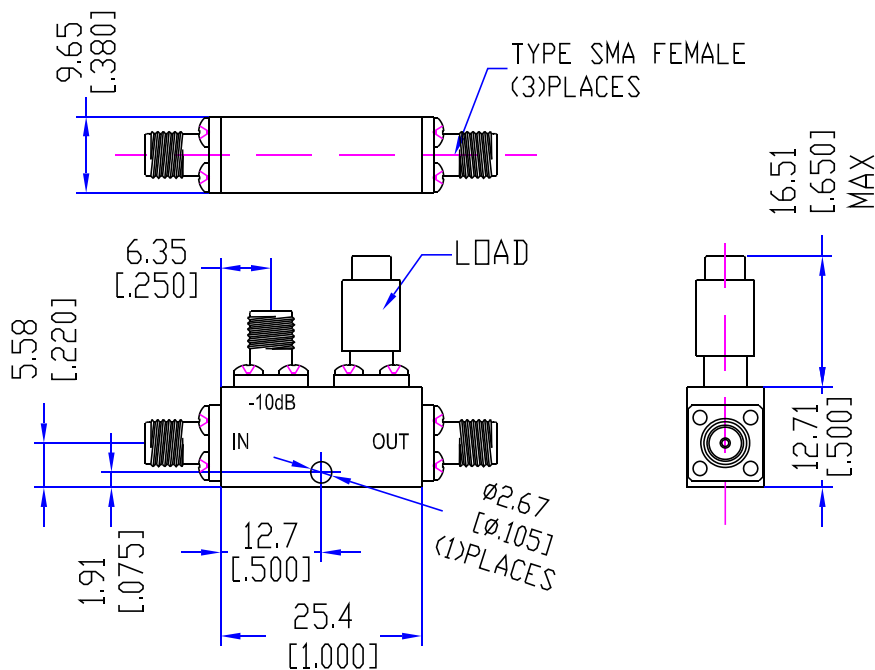

Typical Performance


1. Coupling Factor & Sensitivity, Isolation, VSWR




Trc1 Mem5[Trc1] S11 SWR 100 mU/ Ref 1 U Cal Invisi




Trc2 Mem6[Trc2] S21 dB Mag 5 dB / Ref -22 dB II S21 dB Mag 5 dB / Ref -22 dB

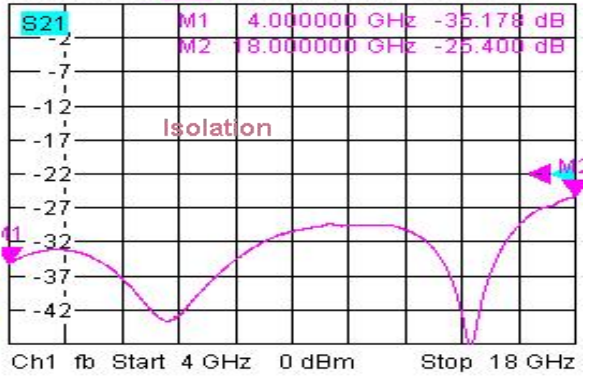

Trc3 Mem7[Trc3] S21 dB Mag 0.7 dB / Ref -9.72 dB S21 dB Mag 0.7 dB / Ref -9.72 dB

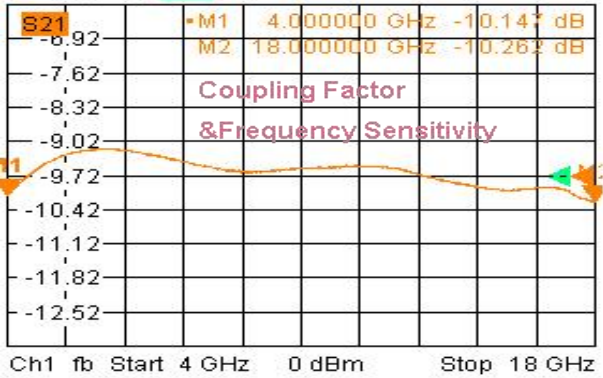

Trc4 Mem8[Trc4] S22 SWR 100 mU/ Ref 1 U Cal Invisi S22 SWR 100 mU/ Ref 1 U Invisi

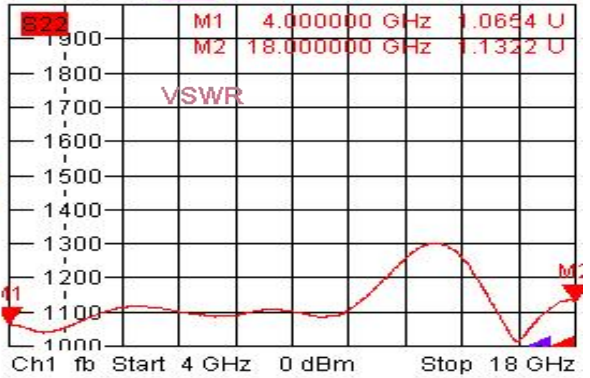

4/17/2019, 4:24 AM

2. Insertion Loss



Trc3 Mem7[Trc3] S21 dB Mag 0.7 dB / Ref 0 dB S21 dB Mag 0.7 dB / Ref 0 dB Cal Invisible 3 (Max)



4/17/2019, 4:24 AM

