


## Model TDC07180A20D

### Features

Low VSWR  
High Directivity  
Broadband & Miniature Size





Technical Data Sheet			
Frequency Range	0.7~18GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤2.1dB (Excl. Coupling Loss 0.08dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤20±1.0dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±1.0dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥12dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.40:1 Secondary ≤1.40:1	Operating Temperature	-55~+85°C
<sup>1</sup> Power Handling	Incident ≤20Watt; Reflected ≤2Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	200g
Port Connectors	SMA-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

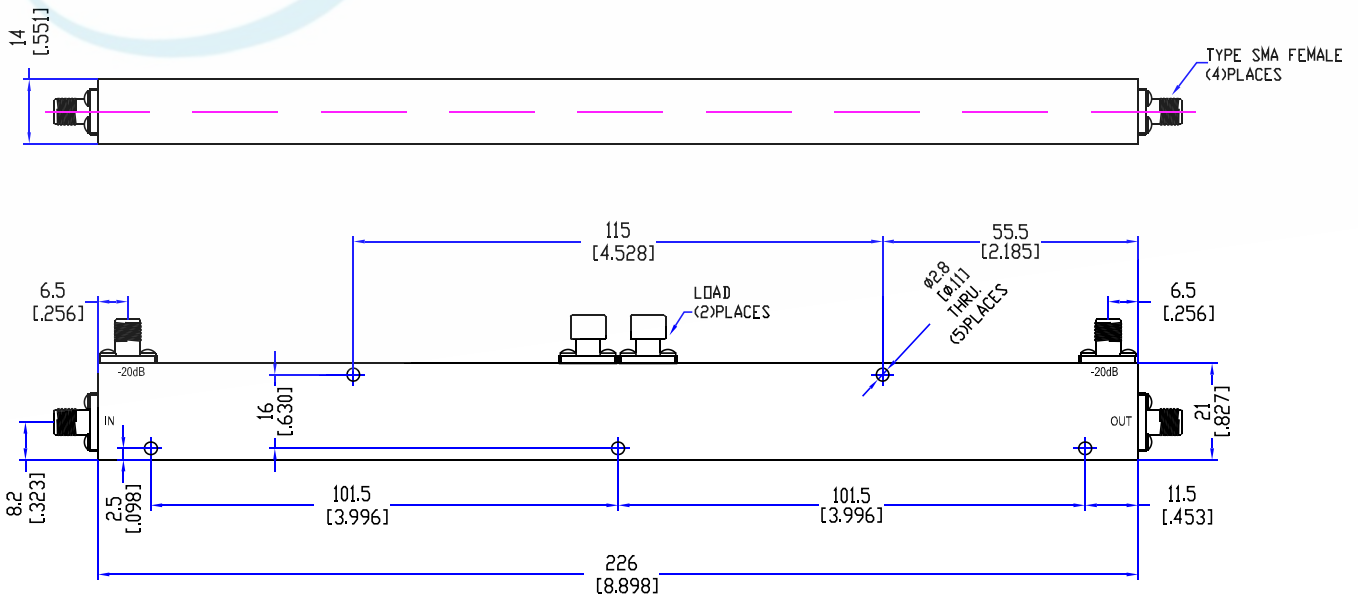

## Typical Performance

### 1. Coupling Factor & Sensitivity, Isolation, VSWR

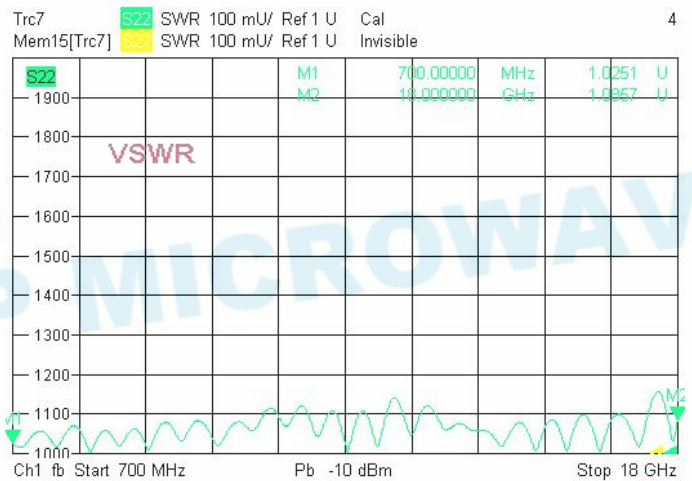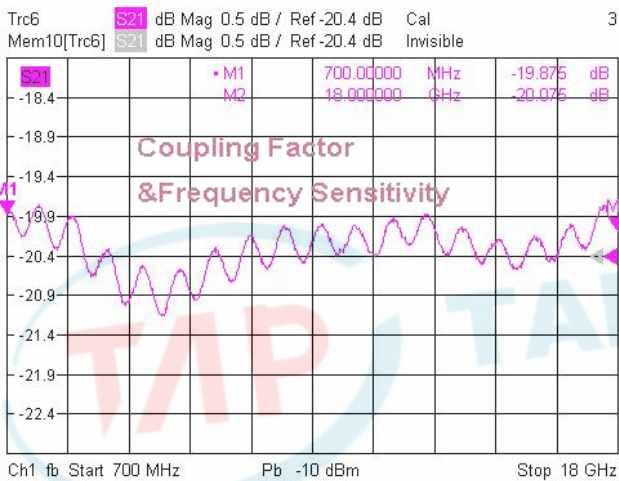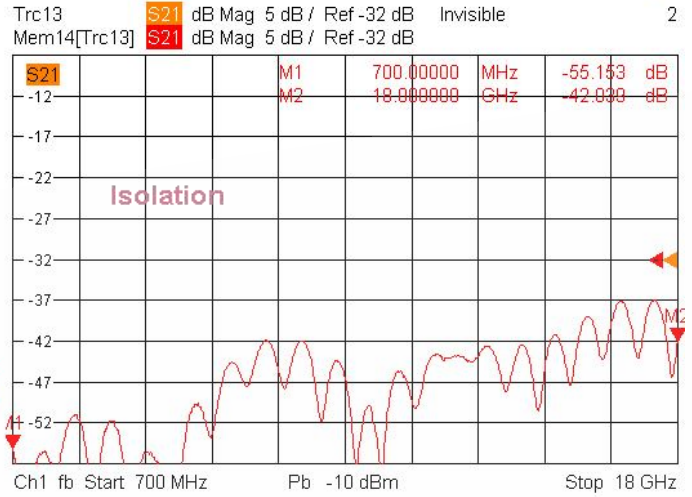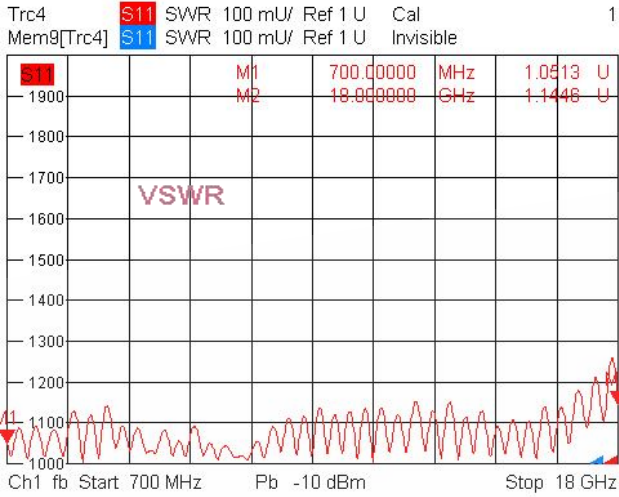


7/8/2024, 1:57 PM




## Typical Performance

### 2. Coupling Factor & Sensitivity, Isolation, VSWR

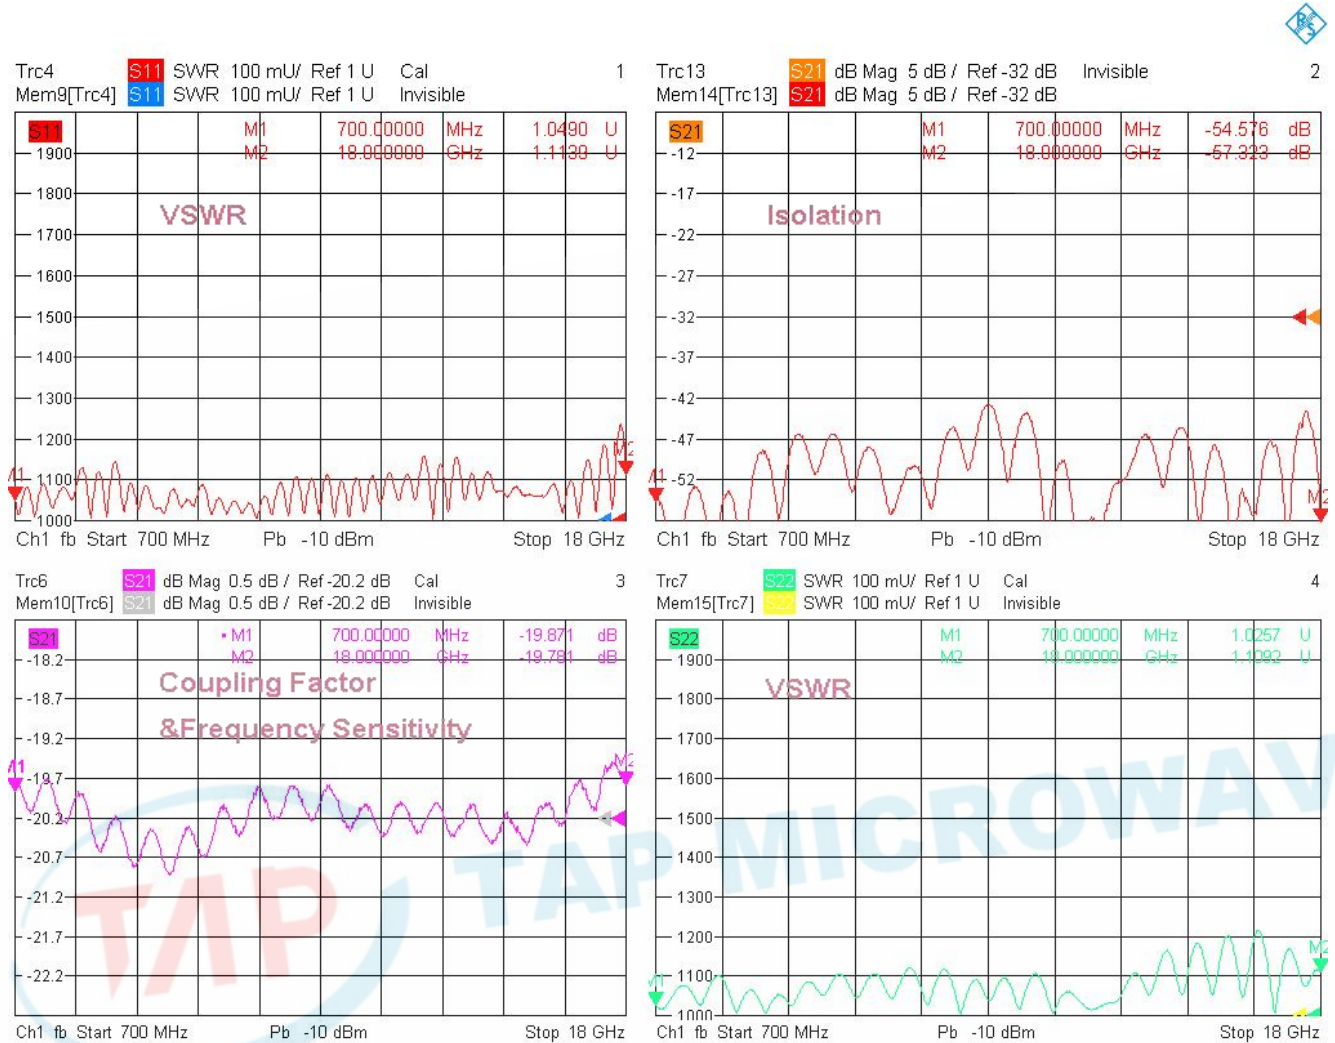

7/8/2024, 1:56 PM

### 3. Insertion Loss

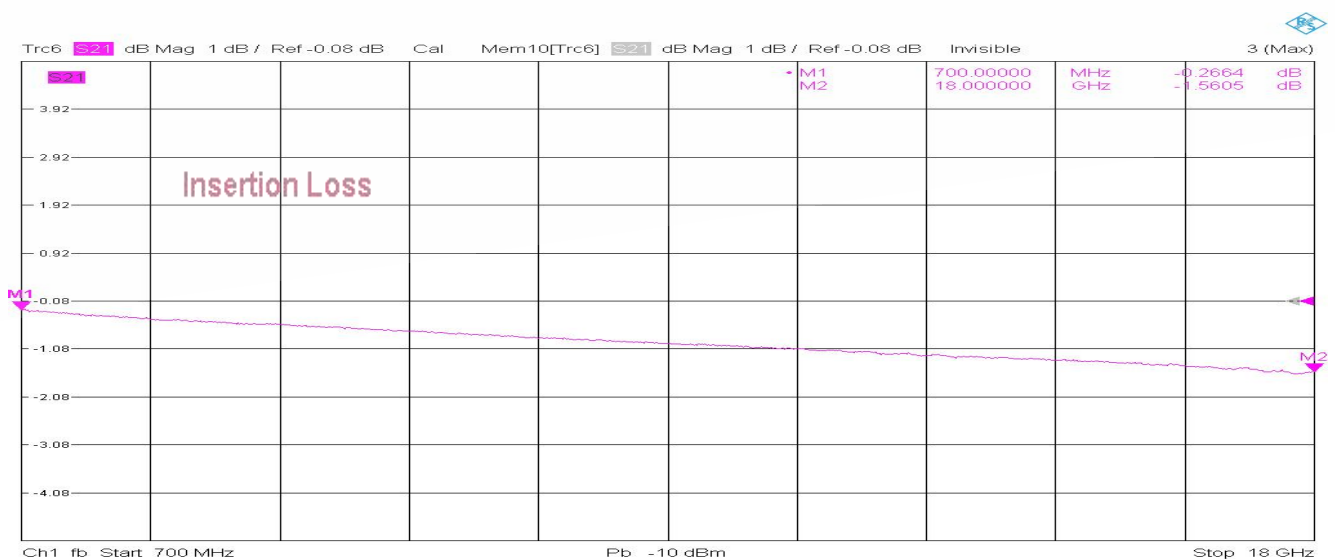

7/8/2024, 2:00 PM

