


## Model TDC09150A10D

### Features

Low VSWR  
High Directivity  
Broadband & Miniature Size


Technical Data Sheet			
Frequency Range	0.9~15GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤1.80dB (Excl. Coupling Loss 0.92dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤10±1dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±1.1dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥15dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.40:1 Secondary ≤1.40:1	Operating Temperature	0~+45°C
<sup>1</sup> Power Handling	Incident ≤10Watt; Reflected ≤10Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	90g
Port Connectors	SMA-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

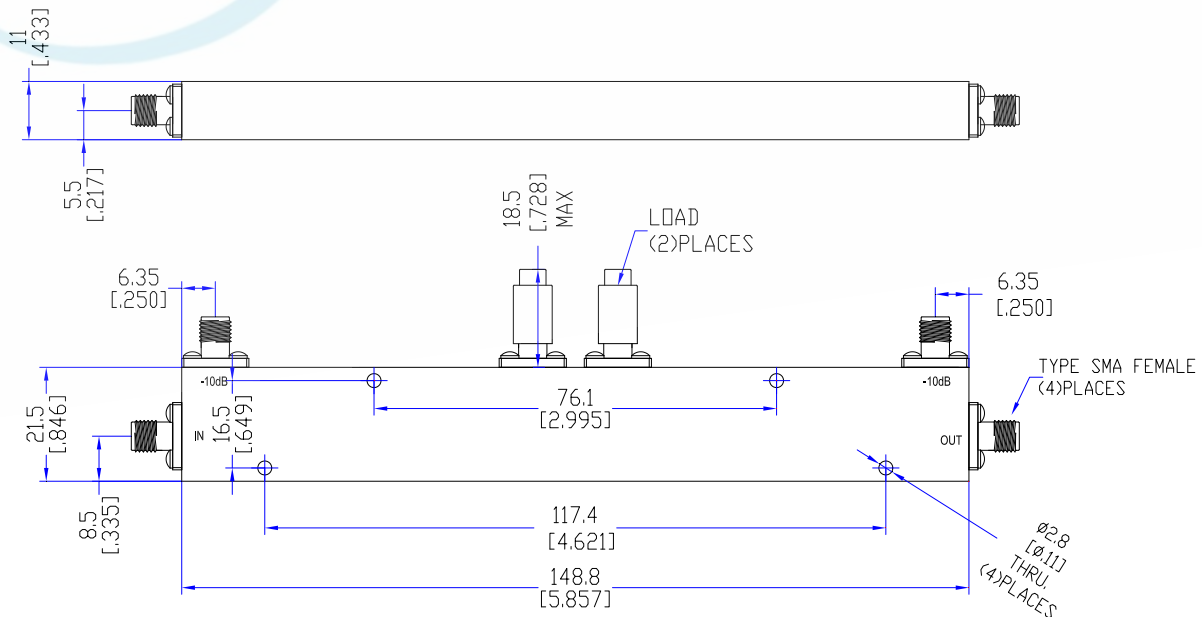


## Typical Performance

### 1. Coupling Factor & Sensitivity, Isolation, VSWR

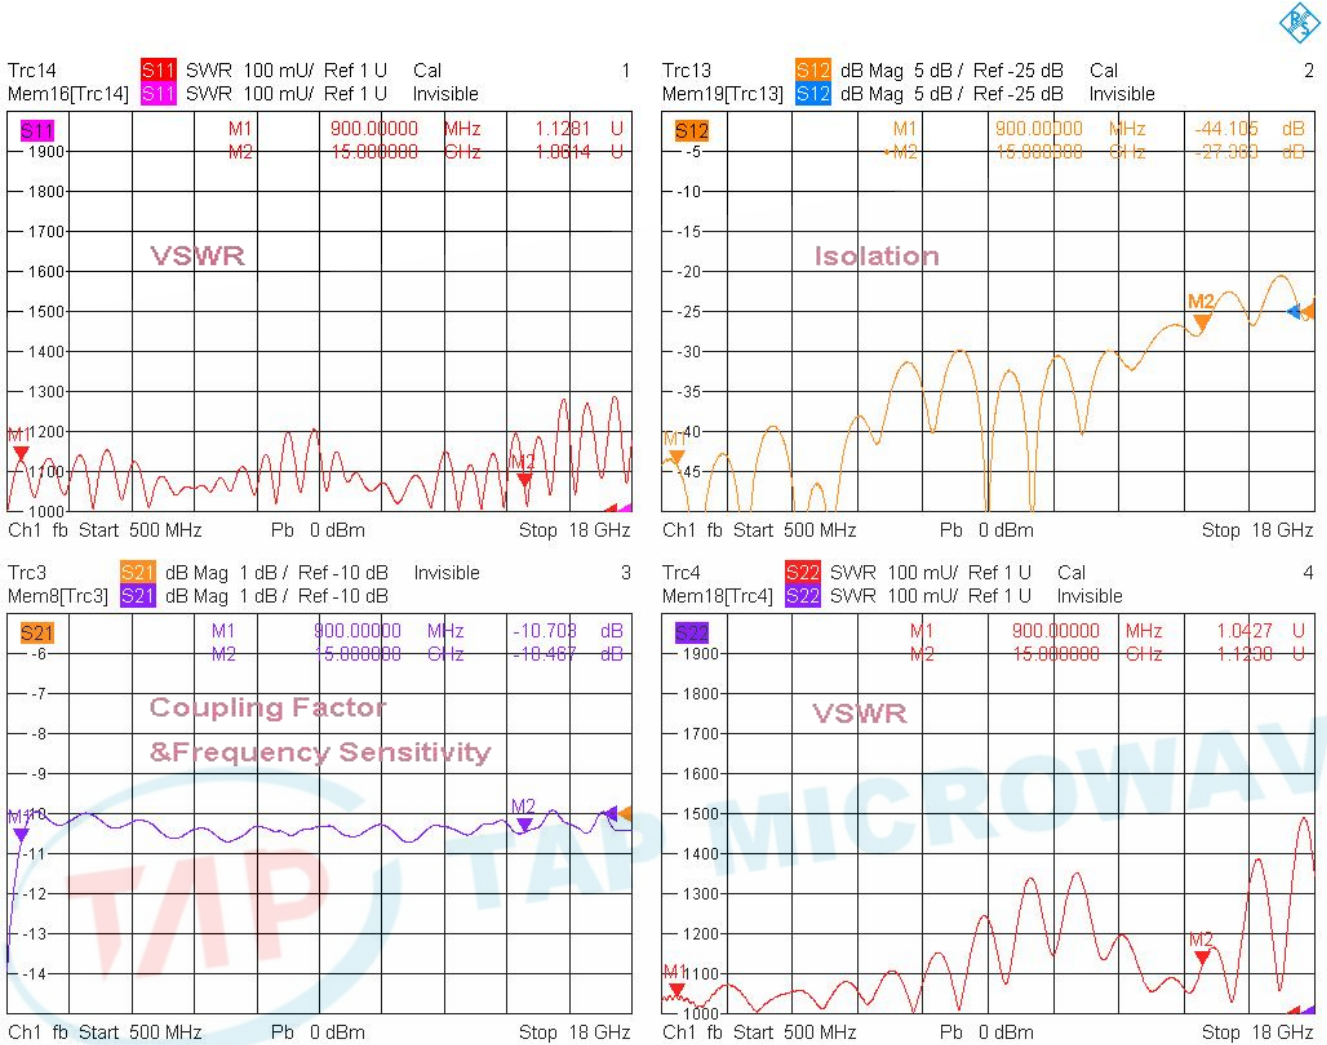

6/5/2023, 2:56 PM

### 2. Insertion Loss

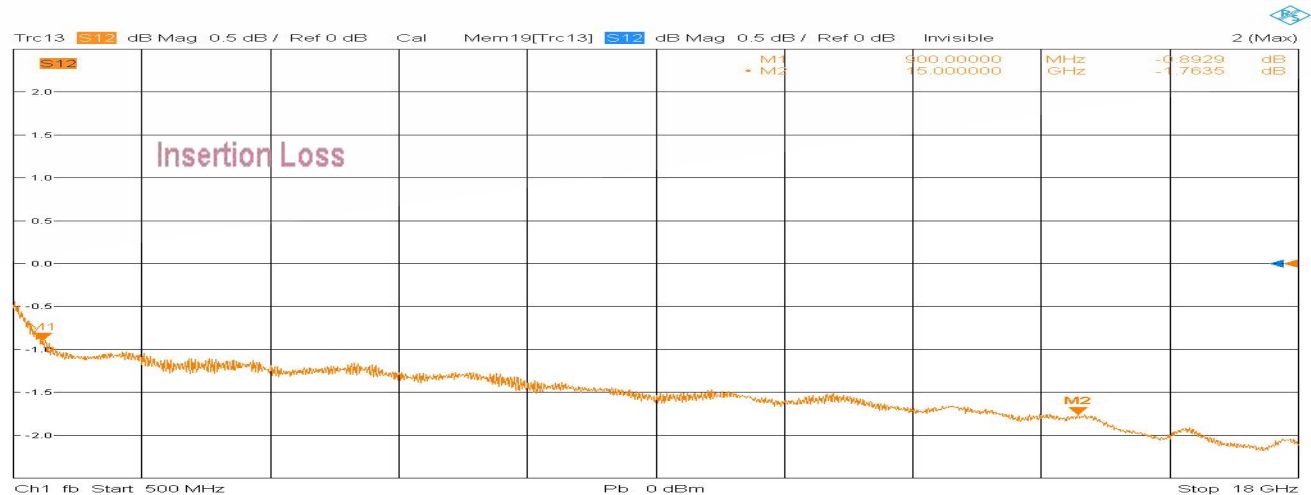

6/5/2023, 2:57 PM

