


Model THC10180B1

Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	1~18GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤2.5dB	Housing	Aluminum, 6061 T6
Isolation	≥18dB		Clear Chem Conversion Film
Amplitude Balance	≤±3.3dB@1~2GHz ≤±0.8dB@2~18GHz	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±15°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.60:1	Operating Temperature	-55~+85°C
¹ Power Handling	Average ≤50Watt Peak ≤1KW	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	110g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

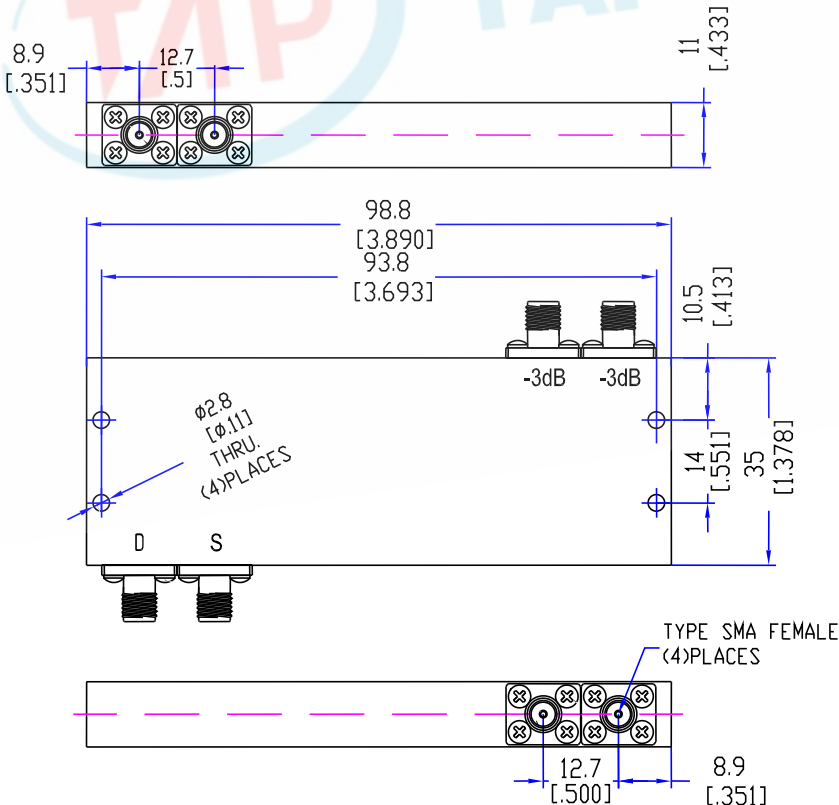

Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR_{-0°}

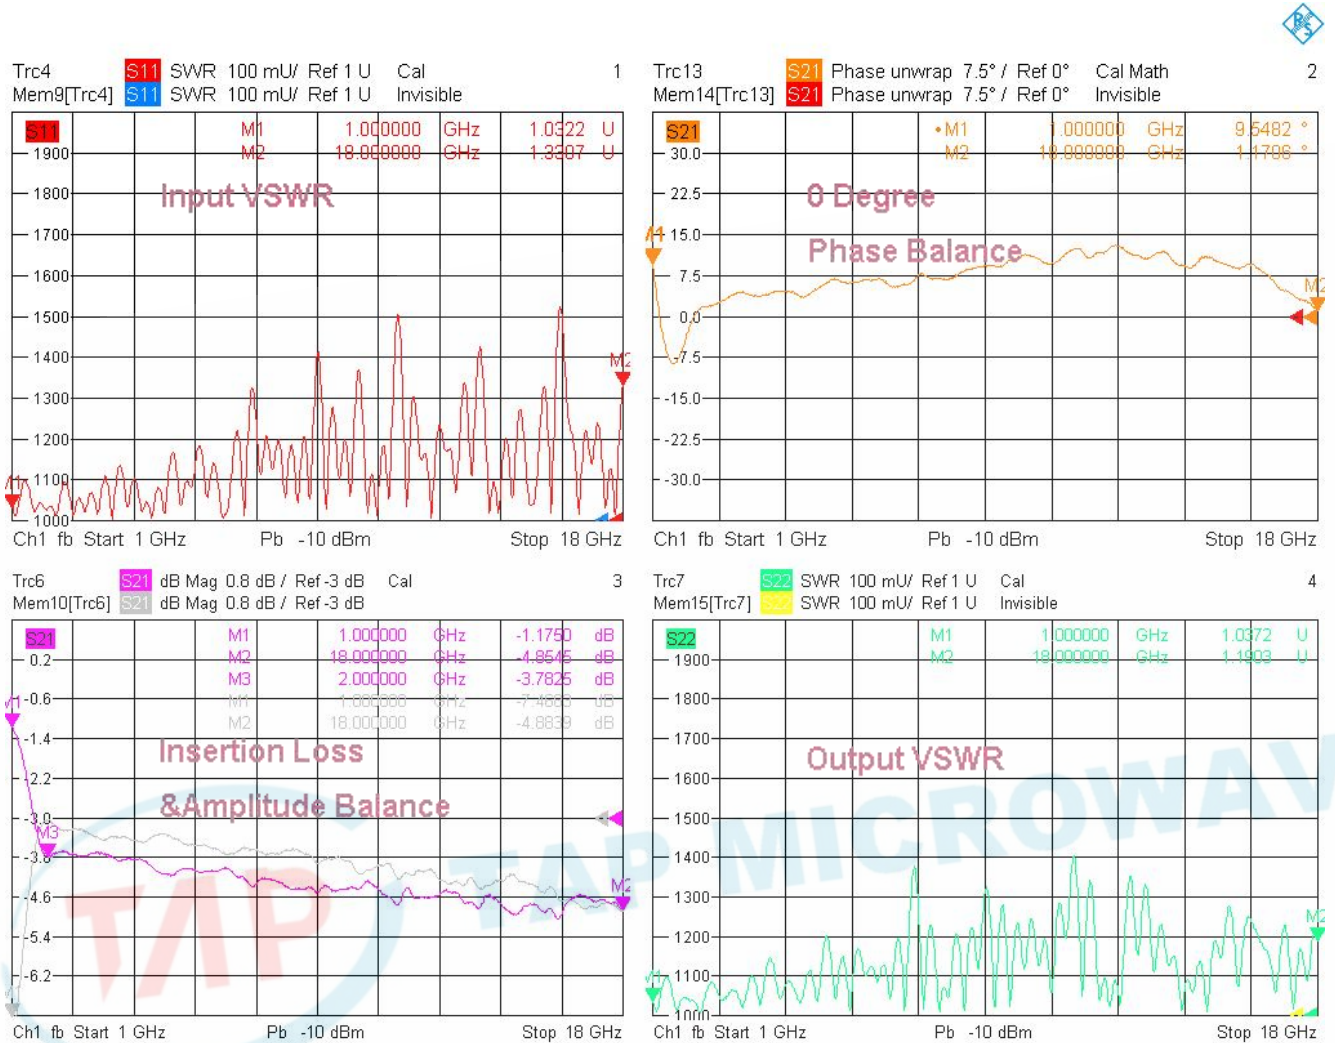


7/1/2024, 10:02 AM



Typical Performance

2. Insertion Loss, Amplitude & Phase Balance, VSWR _ 180°

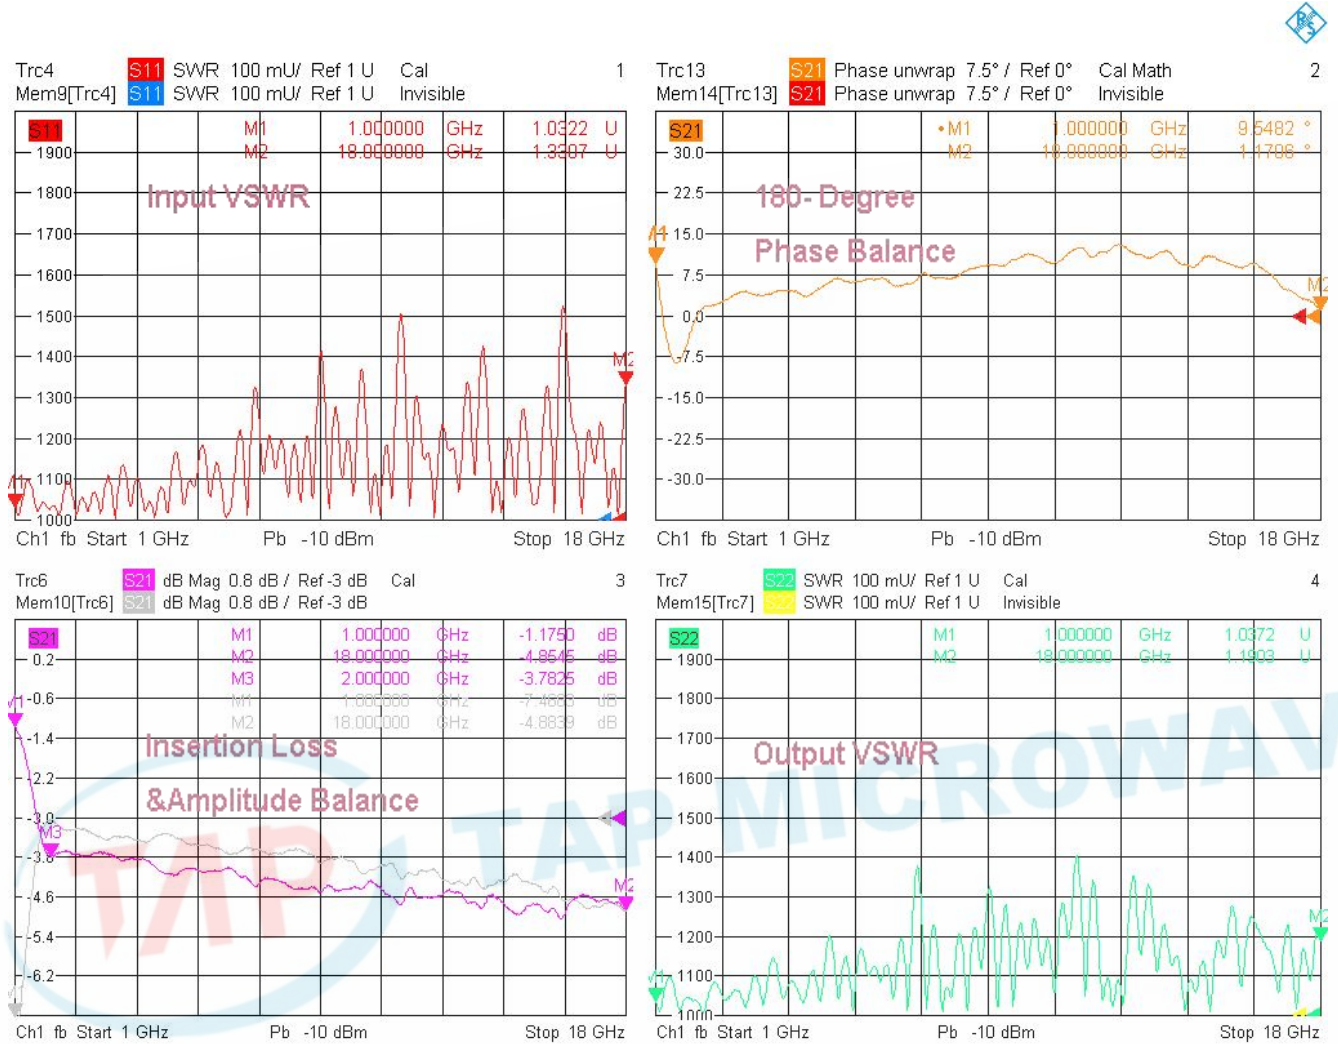

3. Isolation

