


Model THC20180S1

Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	2~18GHz	Finish	Natural oxygen
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤1.2dB	Housing	Aluminum, 6061 T6
Isolation	≥18dB		Clear Chem Conversion Film
Amplitude Balance	≤±0.5dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±5°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.40:1	Operating Temperature	-55~+85°C
¹ Power Handling	Average ≤50Watt Peak ≤1KW	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	30g
Port Connectors	Drop-in Whole Round Pin Φ0.3x1.6mm (SMA-Female removable)		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

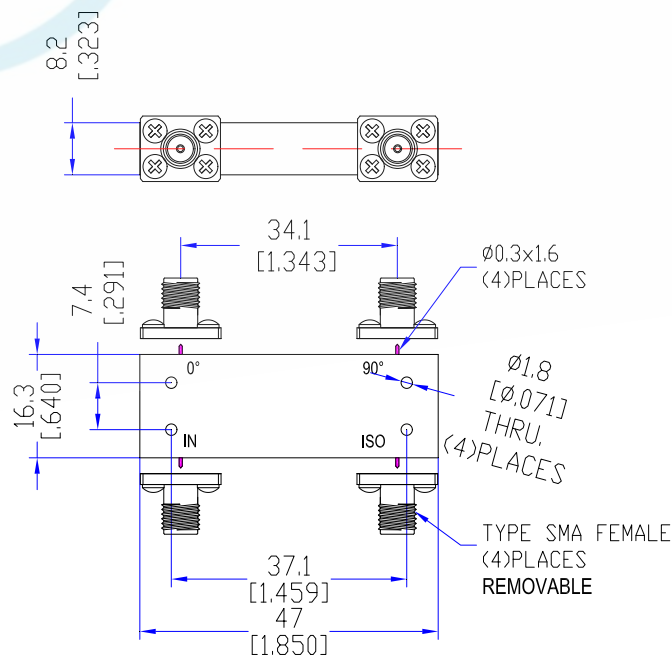

Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR

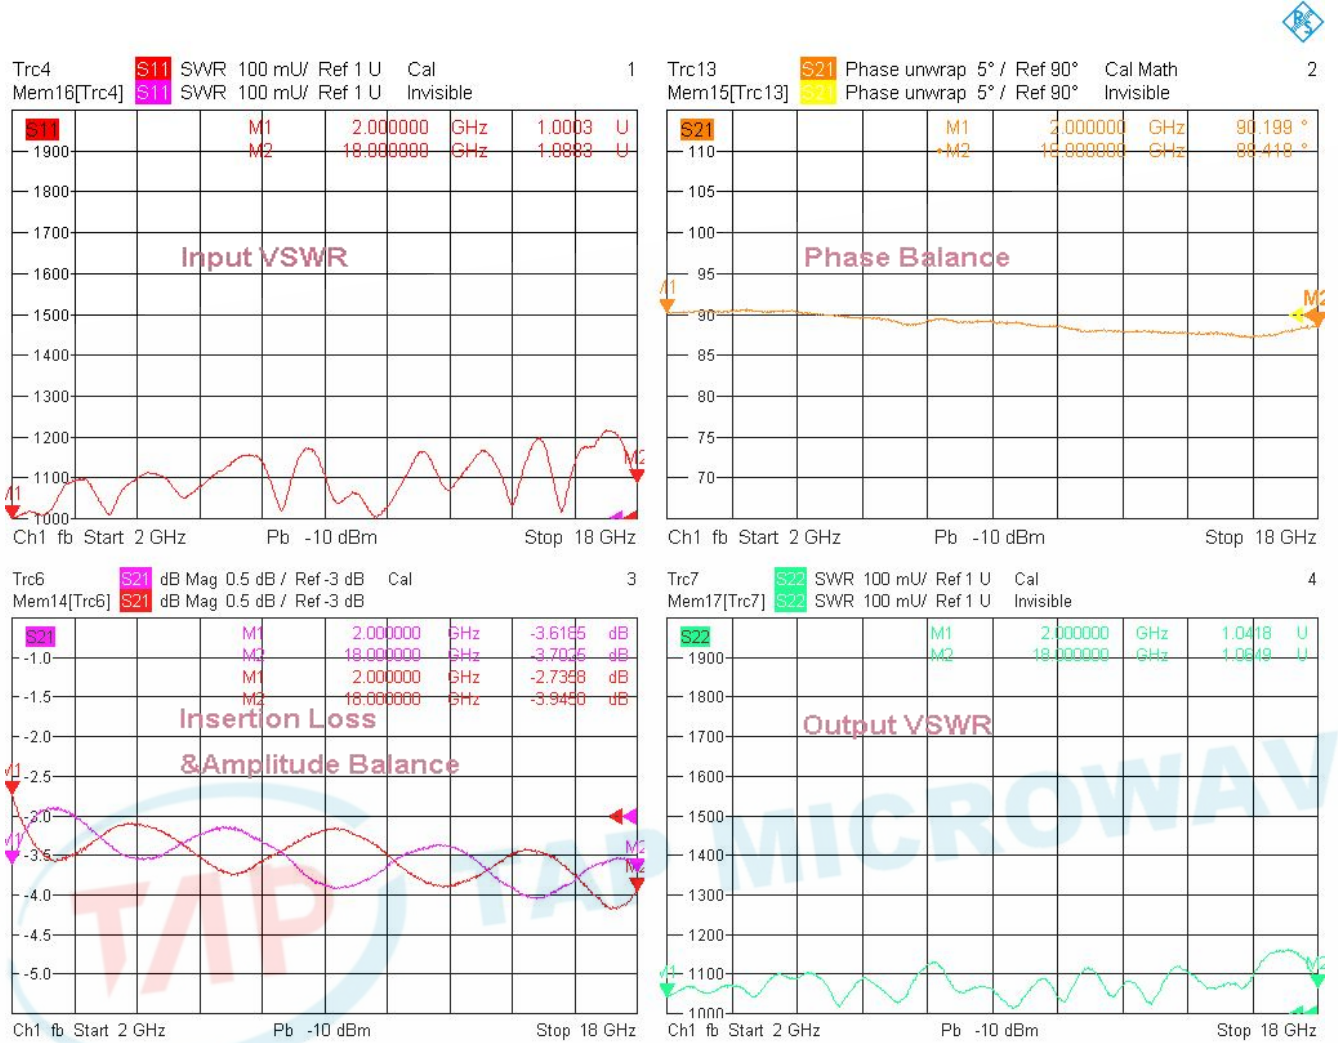


5/9/2024, 4:51 PM




Typical Performance

2. Insertion Loss, Amplitude & Phase Balance, VSWR

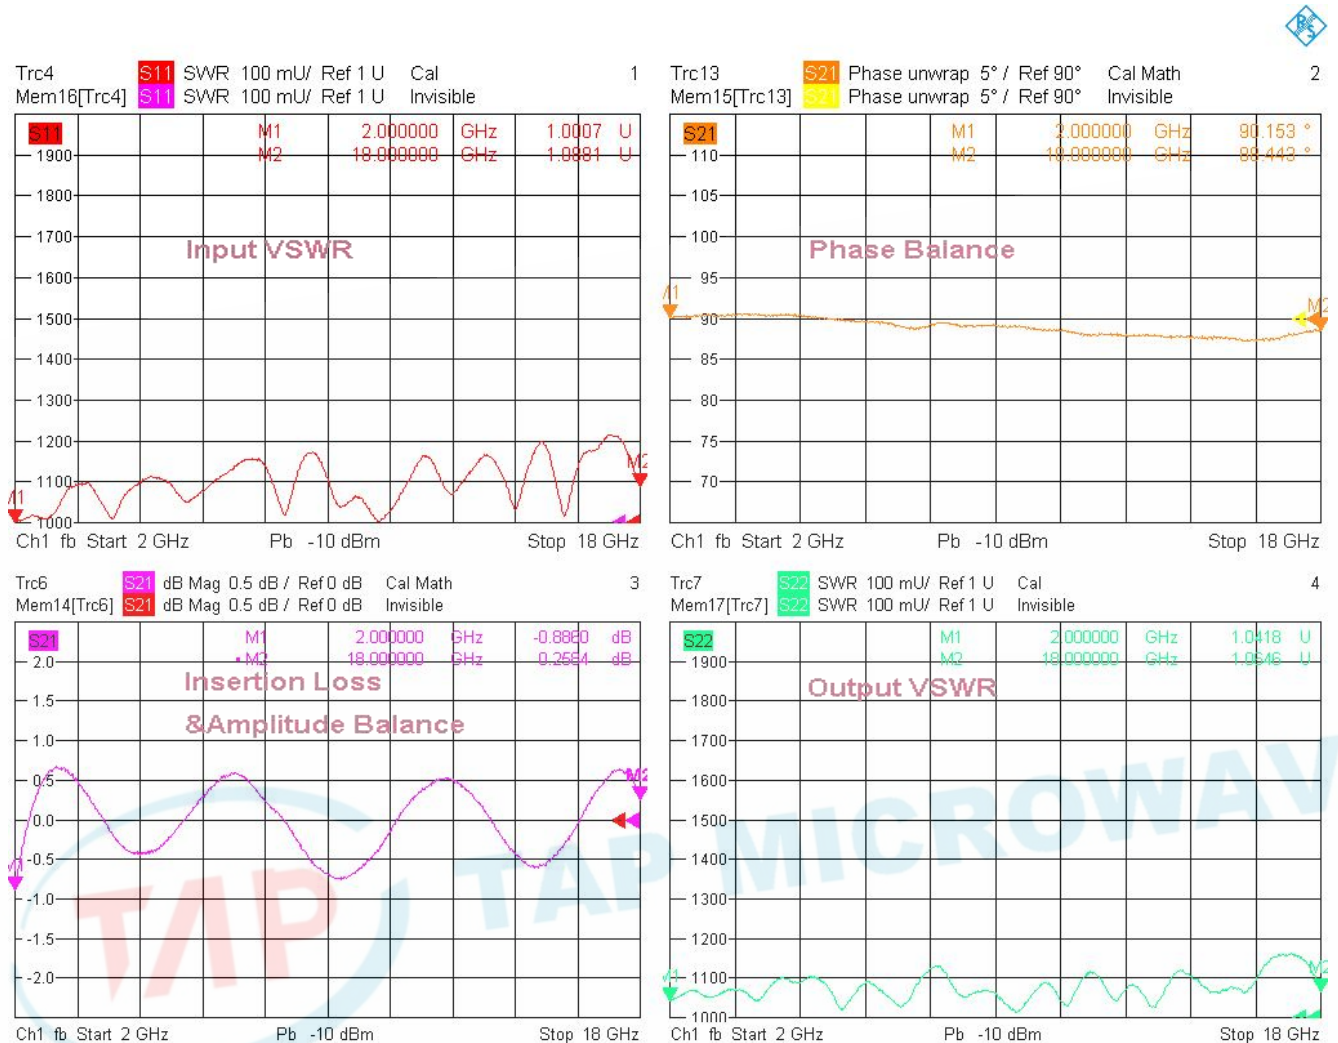

5/9/2024, 4:52 PM

3. Isolation

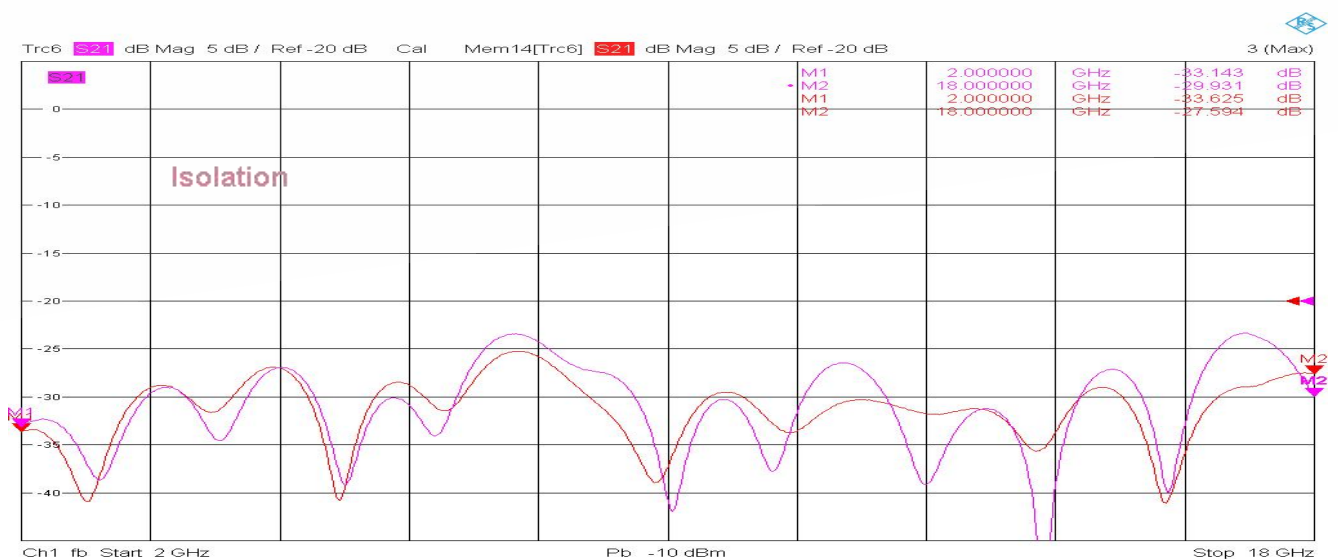

5/9/2024, 4:54 PM

