


Model TDC0512A40DH

Features

Low VSWR
High Directivity
Broadband & Miniature Size





Technical Data Sheet			
Frequency Range	0.5~1.2GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.3dB (Excl. Coupling Loss 0.01dB)	Connector Body	Brass, Tri-Alloy Plate
Coupling Factor	≤40±1.0dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±1.0dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥15dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.25:1 Secondary ≤1.25:1	Operating Temperature	-40~+85°C
¹ Power Handling	Incident ≤120Watt; Reflected ≤120Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	170g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

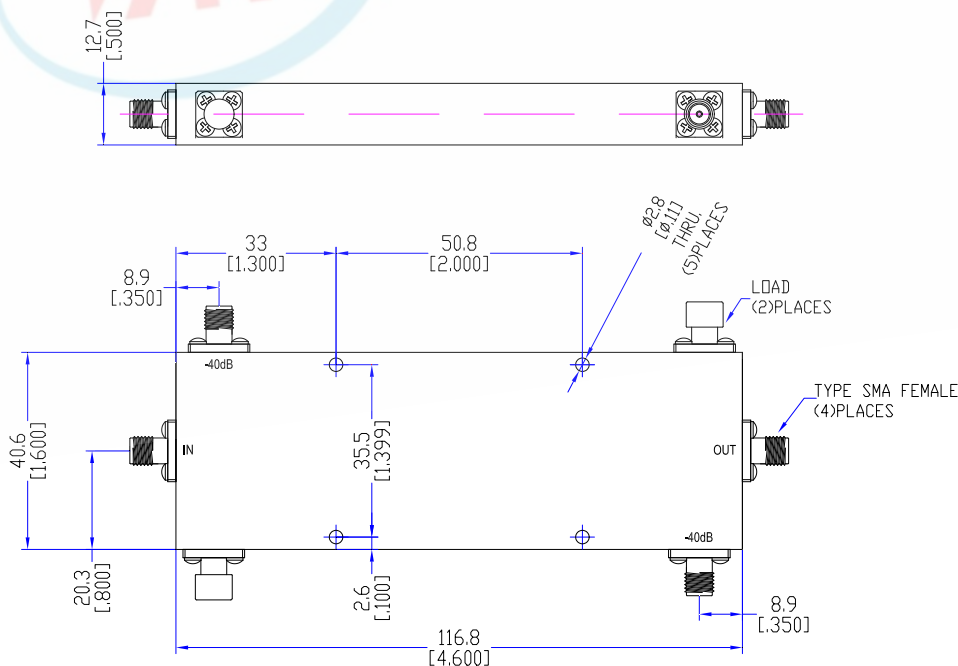

Typical Performance

1. Coupling Factor & Sensitivity, Isolation, VSWR

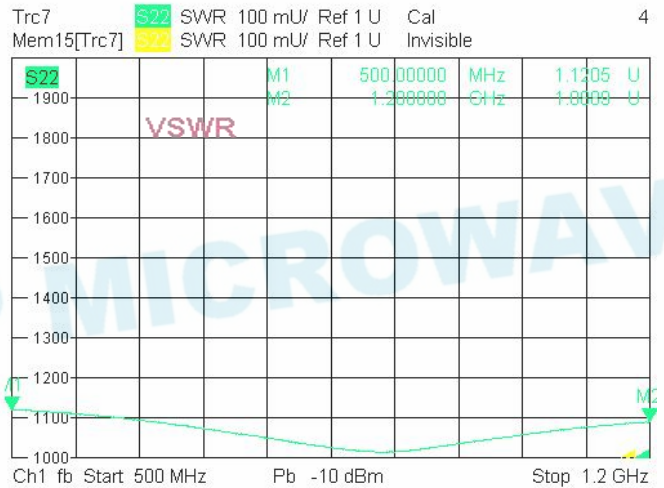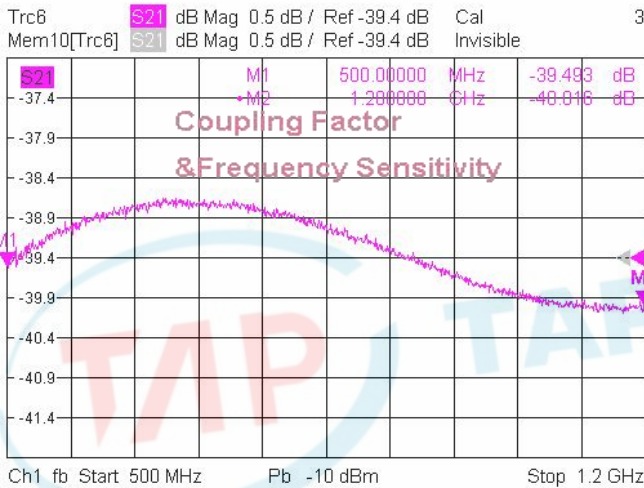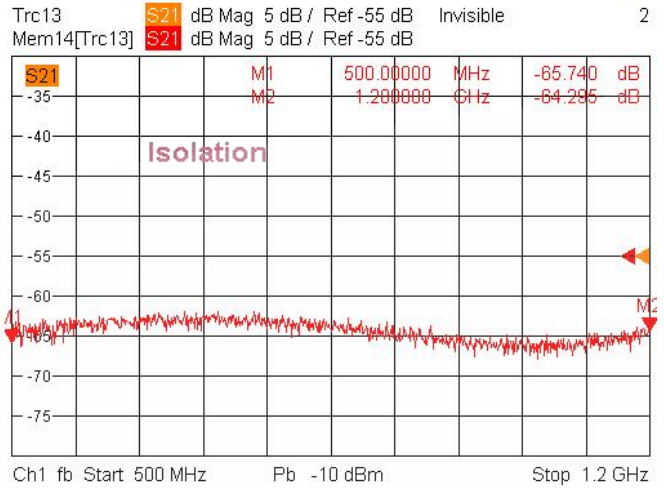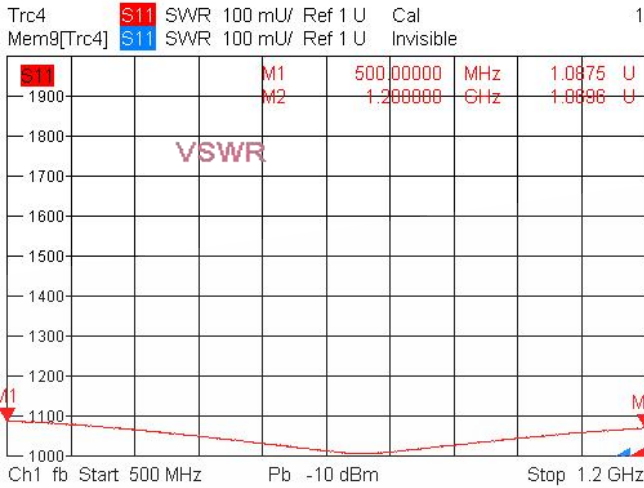


8/17/2024, 3:44 PM




Typical Performance

2. Coupling Factor & Sensitivity, Isolation, VSWR

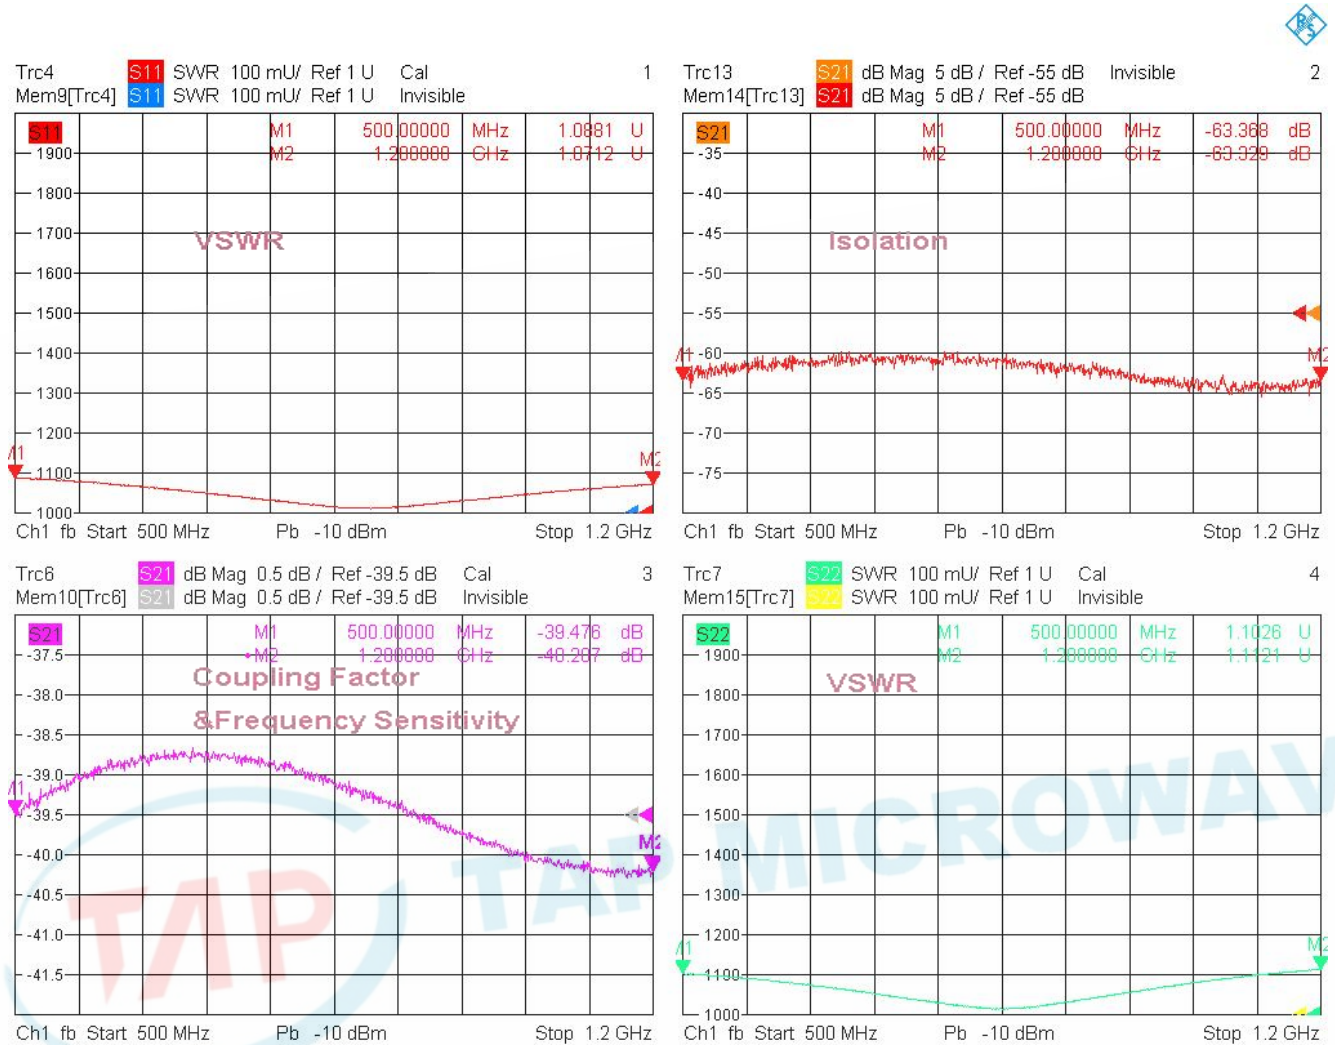

8/17/2024, 3:44 PM

3. Insertion Loss

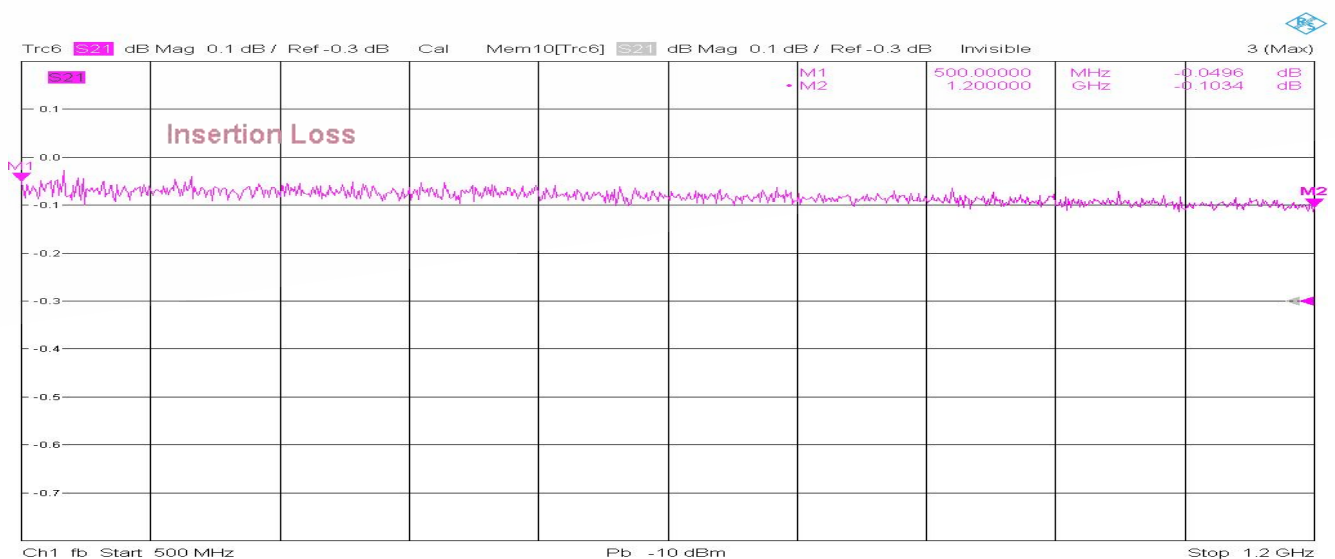

8/17/2024, 3:45 PM

