


## Model THC10180B

### Features

- Excellent phase& amplitude balance
- Low Insertion Loss& VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	1~18GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤4.0dB	Housing	Aluminum, 6061 T6
Isolation	≥14dB		Clear Chem Conversion Film
Amplitude Balance	≤±1.8dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±18°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.80:1	Operating Temperature	-55~+85°C
<sup>1</sup> Power Handling	Average ≤20Watt Peak ≤1KW	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Weight	110g
Port Connectors	2.92mm-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

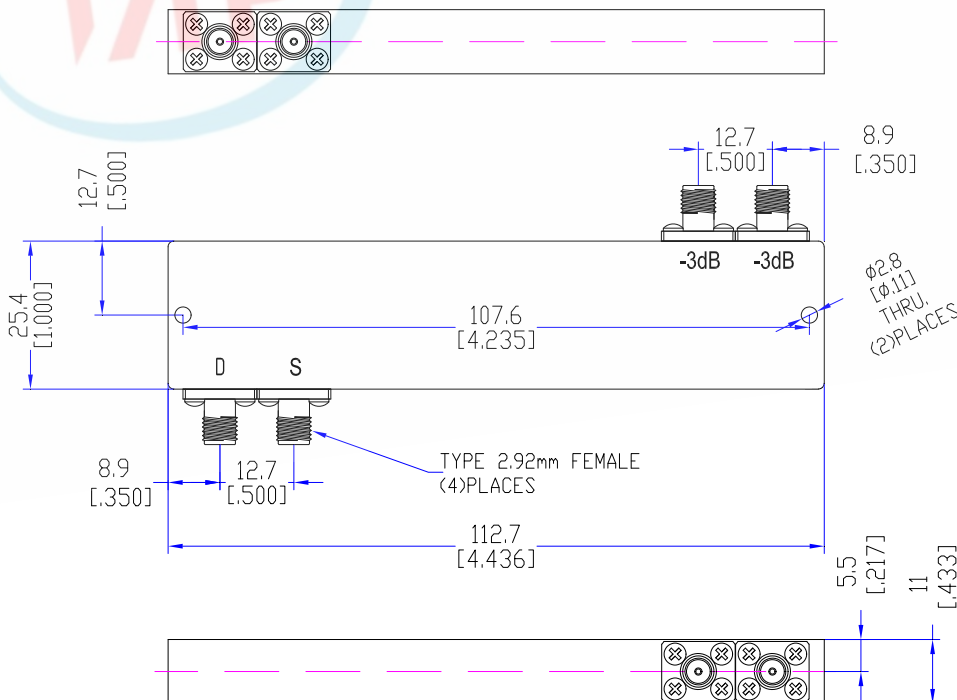

## Typical Performance

### 1. Insertion Loss, Amplitude & Phase Balance, VSWR<sub>0°</sub>

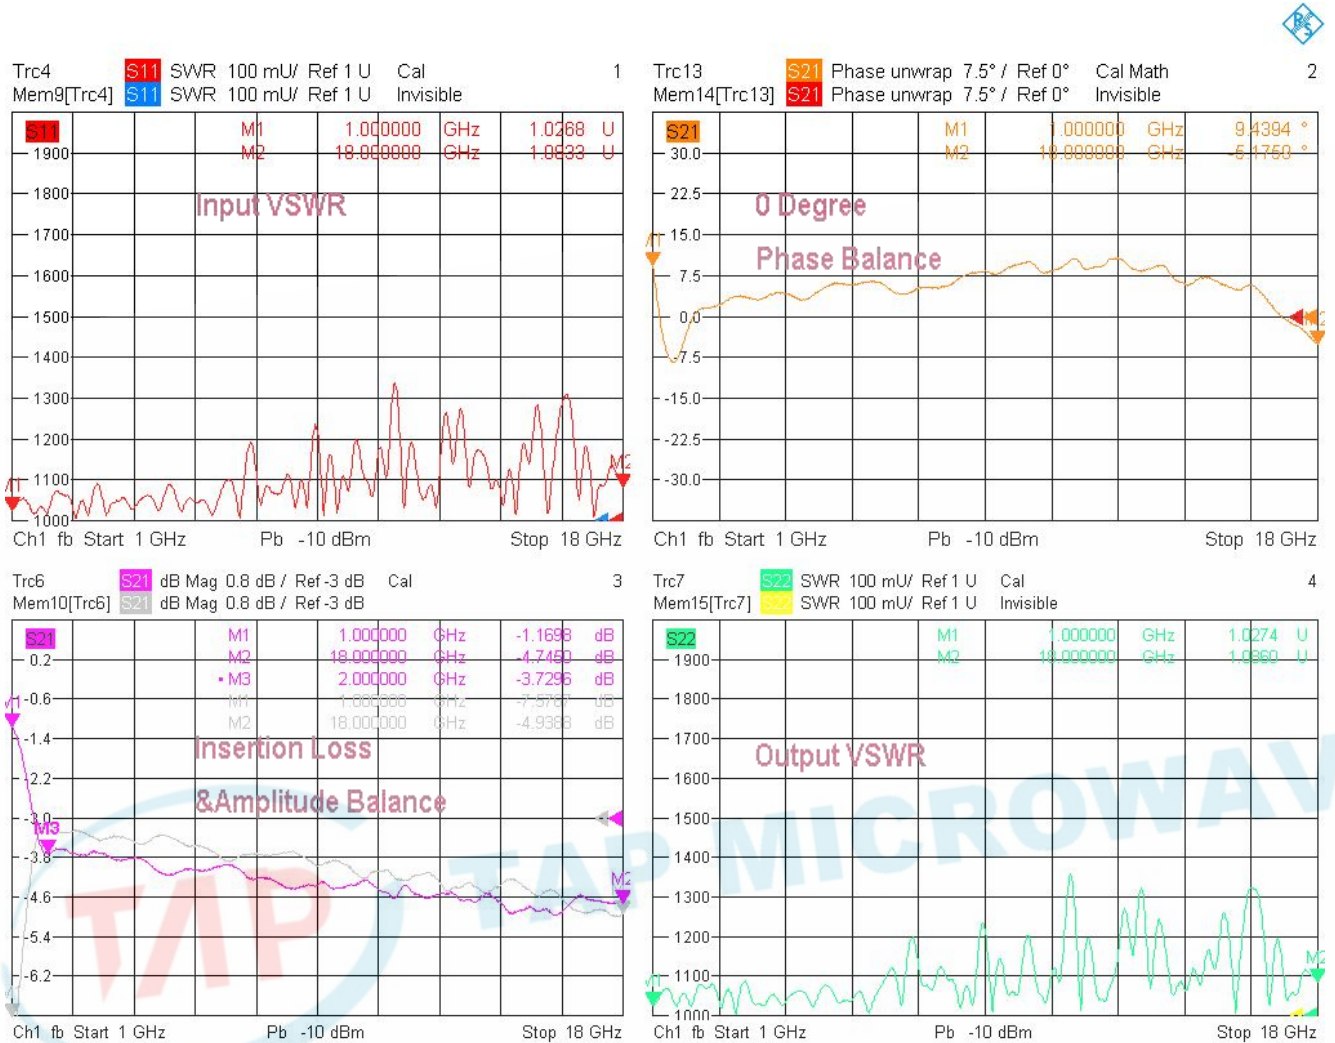


7/1/2024, 9:57 AM



## Typical Performance

### 2. Insertion Loss, Amplitude & Phase Balance, VSWR \_ 180°

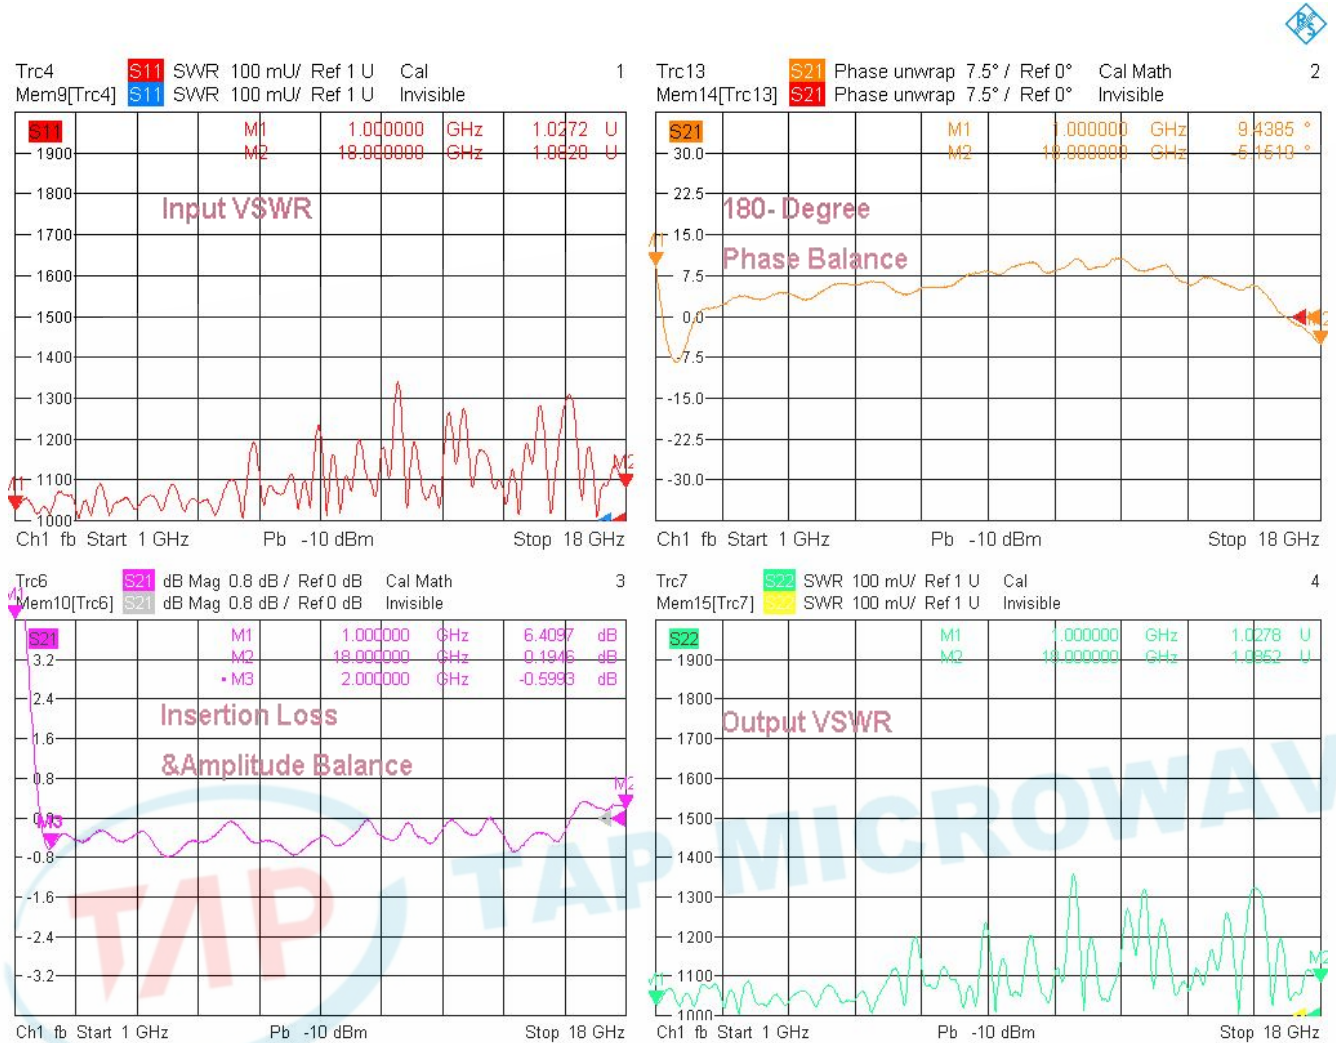

### 3. Isolation

