


Model TDC0640N30

Features

Low VSWR
High Directivity
Broadband & Miniature Size


Technical Data Sheet			
Frequency Range	0.6~4GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.6dB (Excl. Coupling Loss 0.004dB)	Connector Body	Brass, Nickel Plate
Coupling Factor	≤30±1dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±0.3dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥15dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.30:1 Secondary ≤1.30:1	Operating Temperature	-25~+65°C
¹ Power Handling	Incident ≤50Watt; Reflected ≤5Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	300g
Port Connectors	N-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

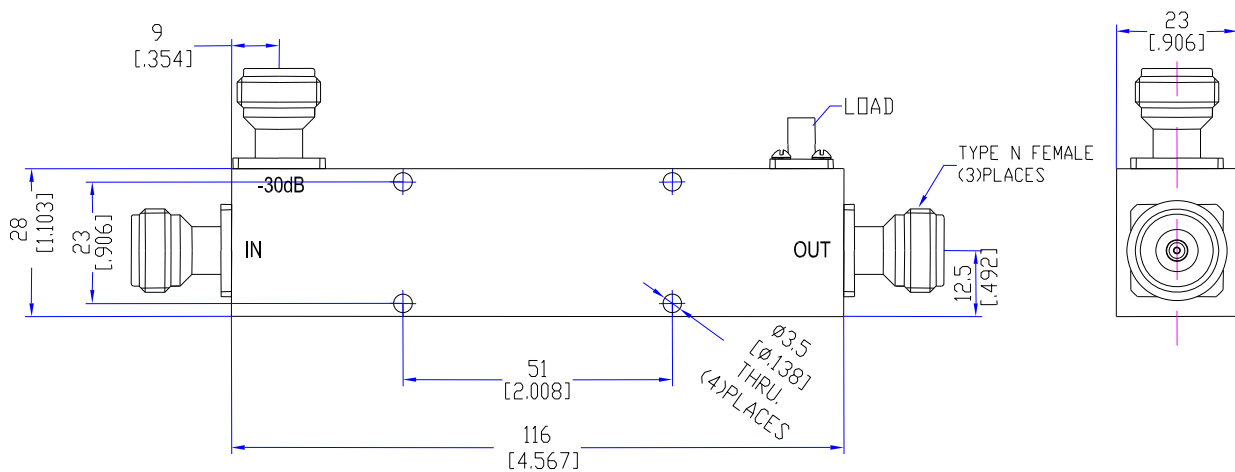


Typical Performance

1. Coupling Factor & Sensitivity, Isolation, VSWR

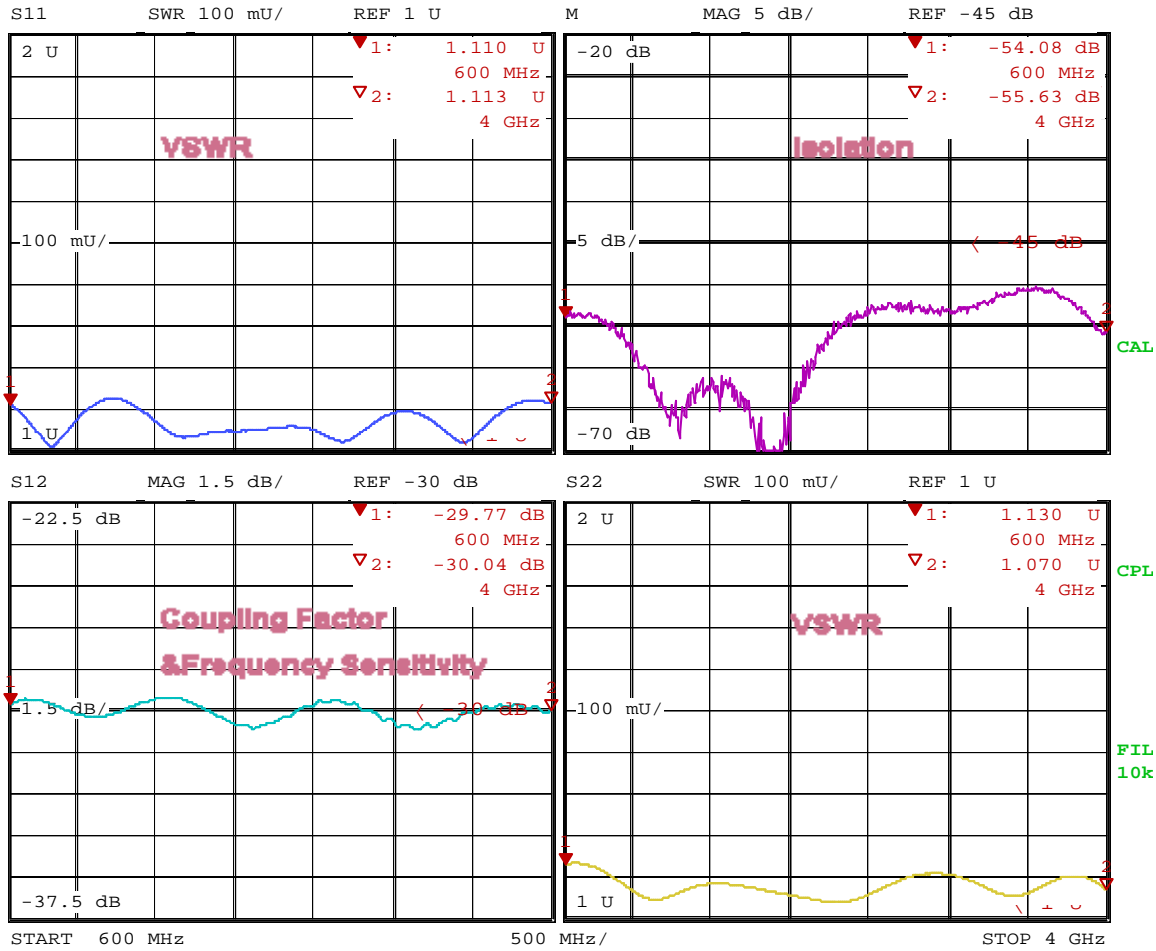

Date: 14.MAY.17 16:58:40

2. Insertion Loss

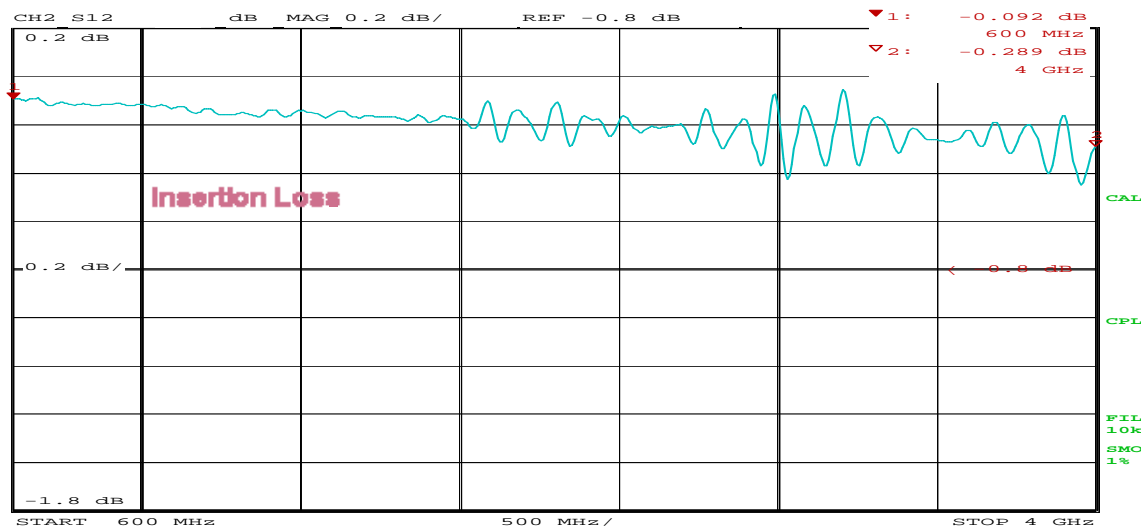

Date: 14.MAY.17 16:59:14

