


## Model TDC20400A20

### Features

Low VSWR  
High Directivity  
Broadband & Miniature Size


| Technical Data Sheet        |                                       |                       |   |
|-----------------------------|---------------------------------------|-----------------------|---|
| Frequency Range             | 2~40GHz                               | Finish                | Painted Blue_ RAL #5007                         |
| Insertion Loss              | ≤1.6dB (Excl. Coupling Loss 0.04dB)   | Connector Body        | Passivated Stainless Steel                      |
| Coupling Factor             | ≤20±1.0dB                             | Housing               | Aluminum, 6061 T6<br>Clear Chem Conversion Film |
| Coupling Sensitivity        | ≤±1.0dB                               | Connector Pin         | Beryllium Copper, Gold Plate                    |
| Directivity                 | ≥12dB                                 | Solder                | Lead Free, RoHS Compliant                       |
| VSWR                        | Primary ≤1.60:1<br>Secondary ≤1.60:1  | Operating Temperature | -55~+85°C                                       |
| <sup>1</sup> Power Handling | Incident ≤20Watt;<br>Reflected ≤1Watt | Operating Humidity    | Up to 95%, Non- Condensing                      |
| Impedance                   | 50Ω                                   | Weight                | 30g   |
| Port Connectors             | 2.92mm-Female                         |                       |   |

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

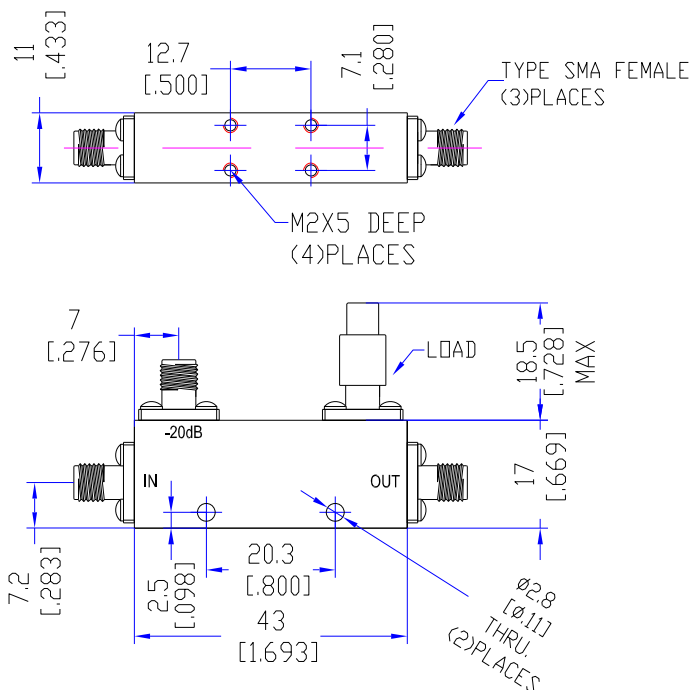


## Typical Performance

### 1. Coupling Factor & Sensitivity, Isolation, VSWR

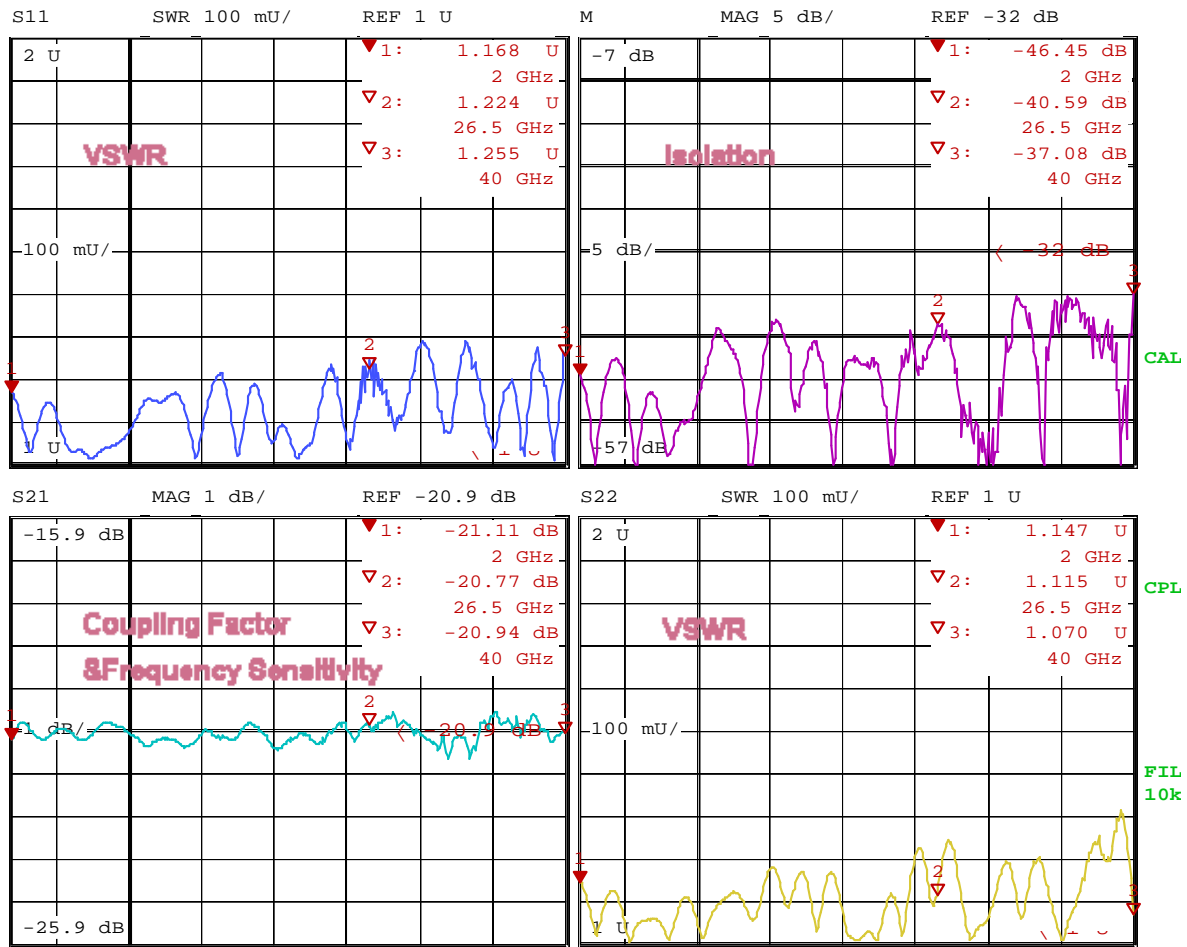

Date: 23.MAY.19 17:06:47

### 2. Insertion Loss

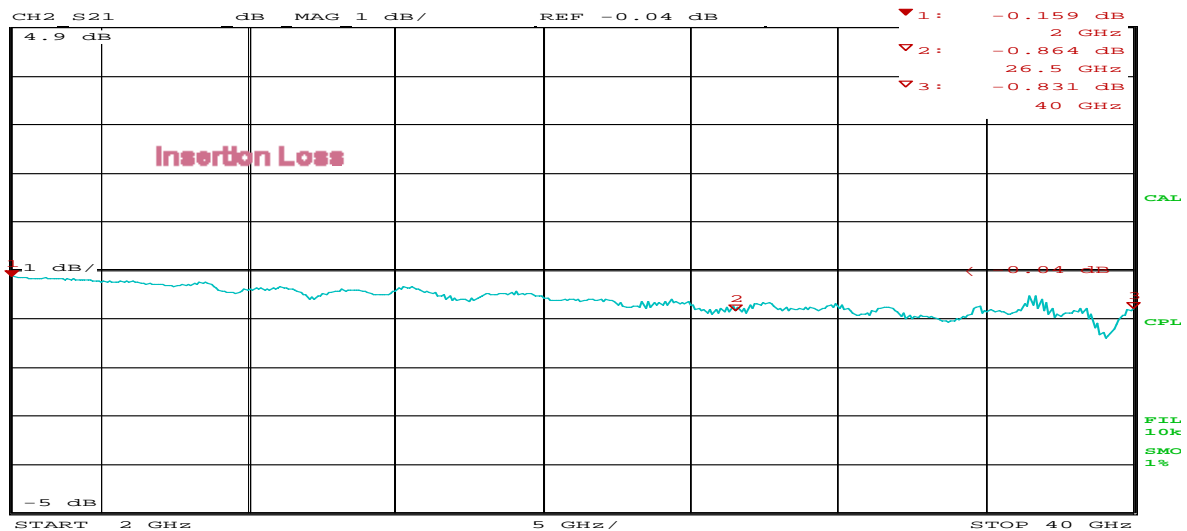

Date: 23.MAY.19 17:08:25

