


Model TPD0627N8B

Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	0.6~2.7GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤1.80dB (Above 6.02dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.50:1 Output ≤1.30:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥18dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.5dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±5°	Operating Temperature	-40~+65°C
¹ Power Handling	Forward ≤30Watt; Rev. ≤1Watt	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	840g
Port Connectors	Input: N-Female Output: SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

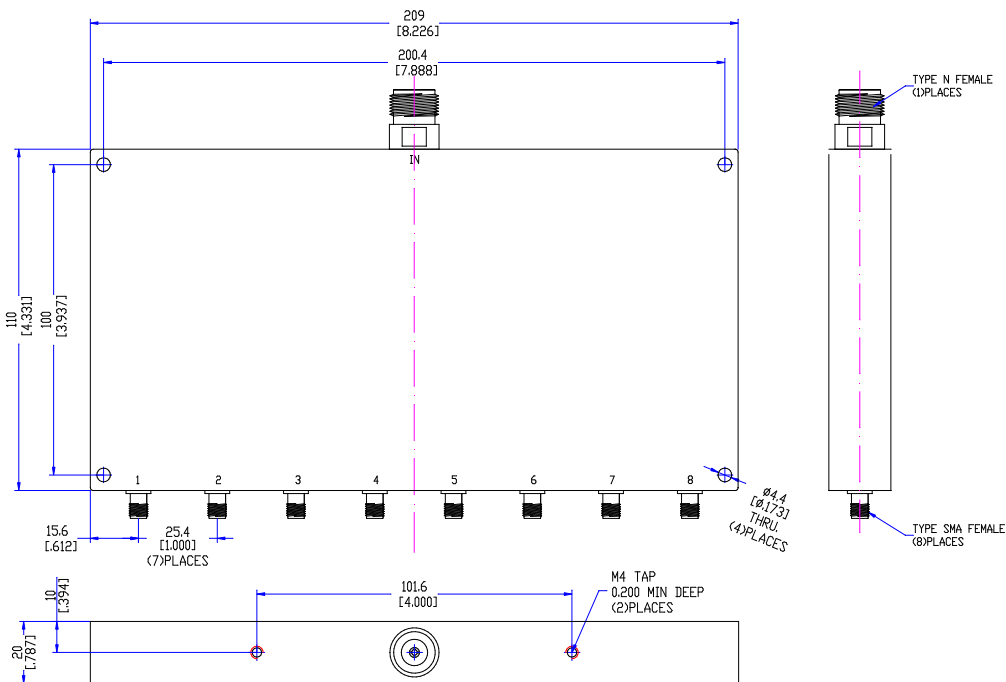


Typical Performance

1. Insertion Loss, Amplitude &Phase Balance, VSWR

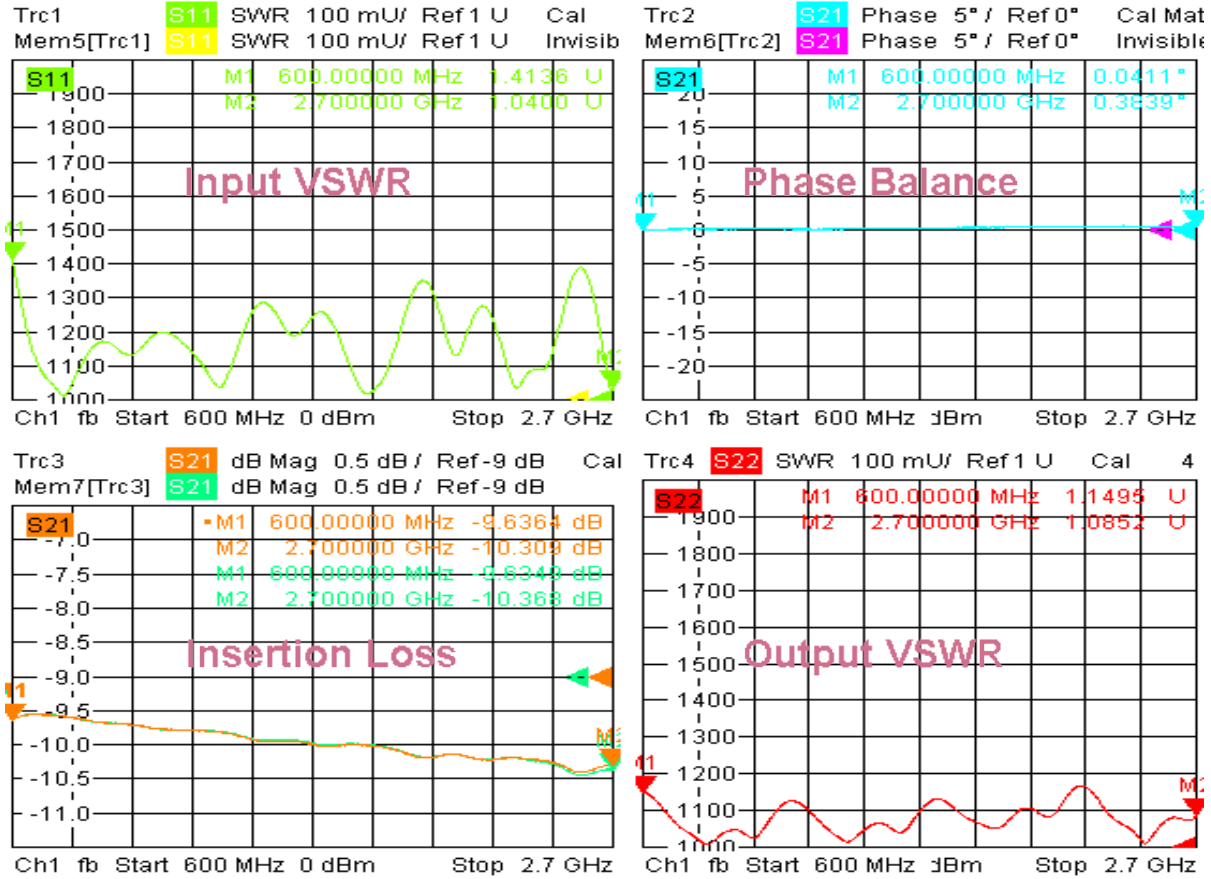

5/12/2020, 4:21 AM

2. Isolation

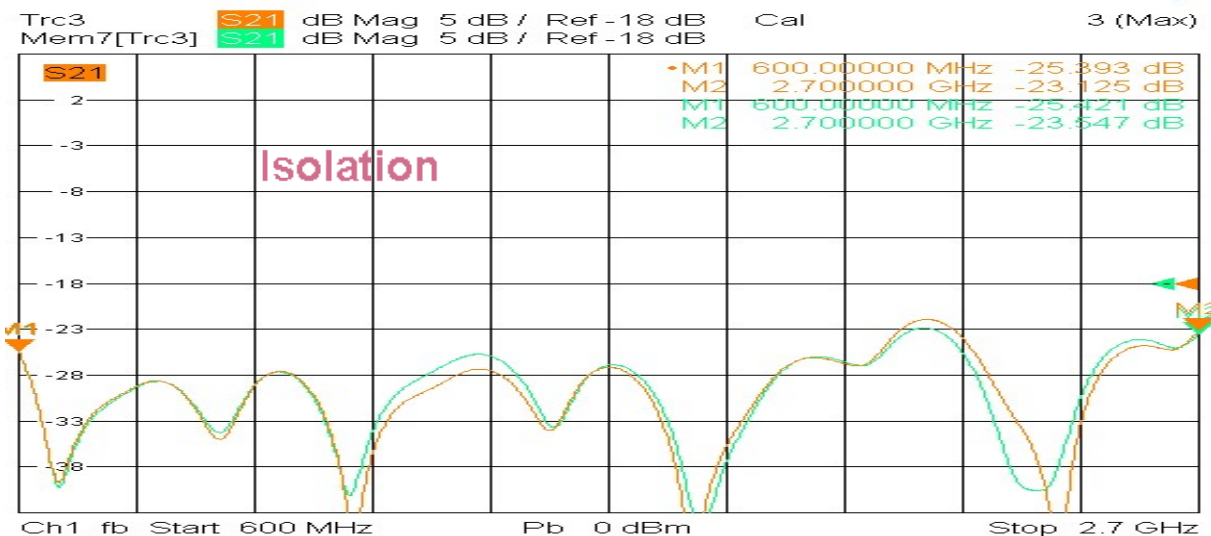

5/12/2020, 4:31 AM

