


Model TPD0922N8

Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	0.9~2.2GHz	Finish	Natural oxygen
Insertion Loss	≤1.6dB (Above 9.03dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.45:1 Output ≤1.30:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥20dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.5dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±5°	Operating Temperature	-55~+85°C
¹ Power Handling	Forward ≤50Watt; Reversed ≤10Watt	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	400g
Port Connectors	N-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

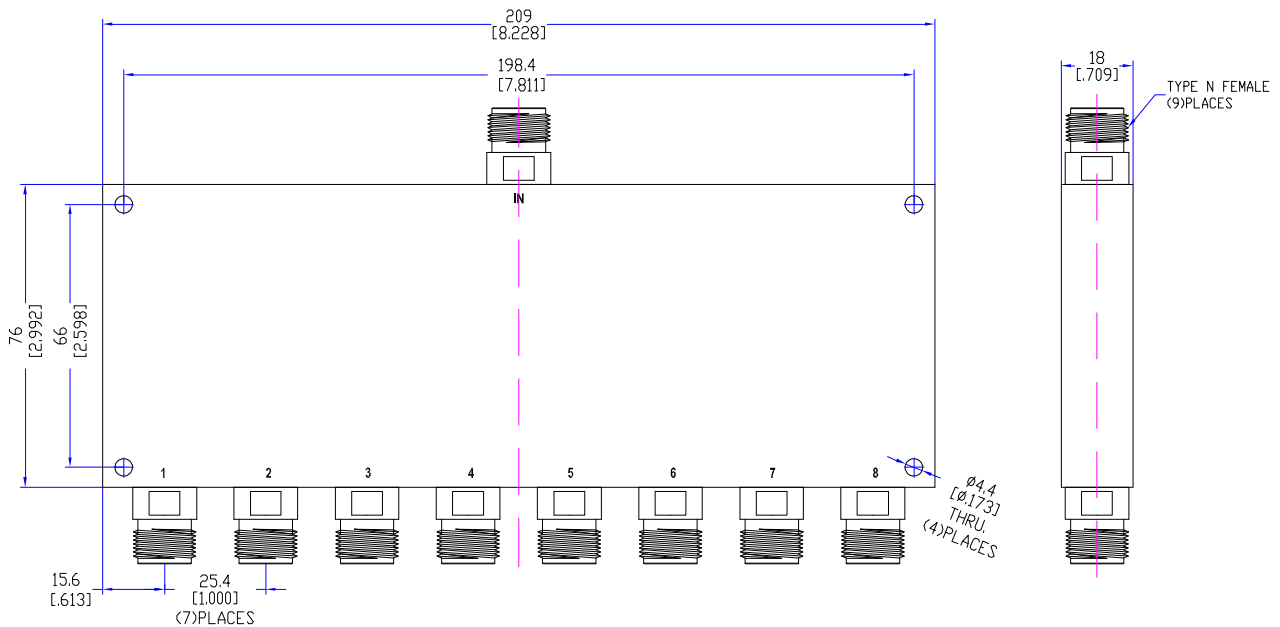


Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR

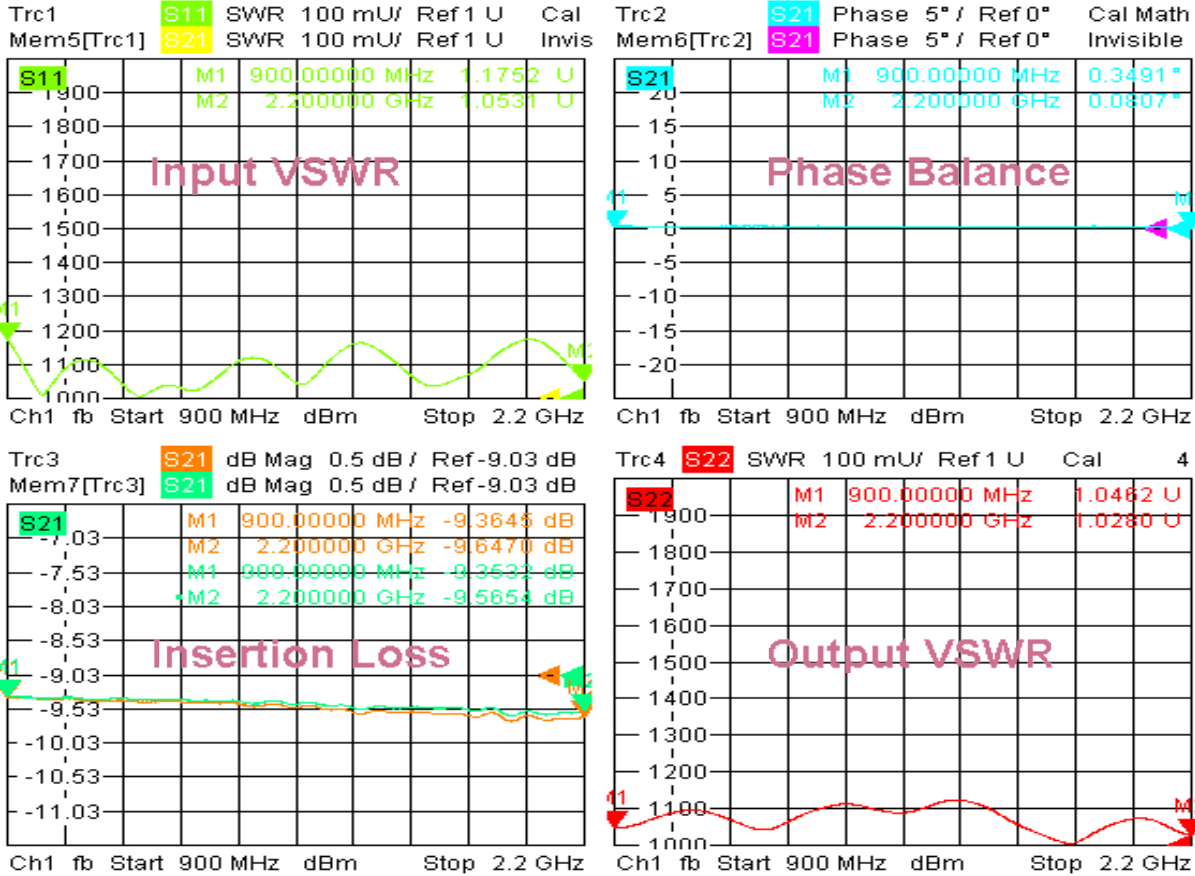

8/9/2018, 5:57 PM

2. Insertion Loss

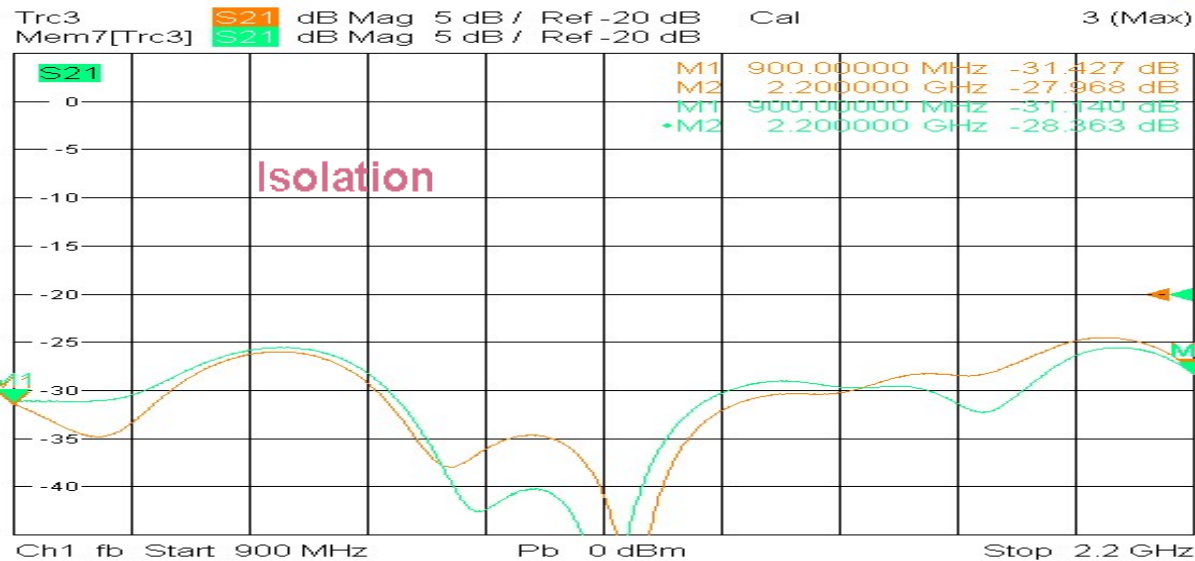

8/10/2018, 10:51 AM

