


## Model TDC0624A10

### Features

Low VSWR  
High Directivity  
Broadband & Miniature Size


Technical Data Sheet			
Frequency Range	0.6~2.4GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.4dB (Excl. Coupling Loss 0.46dB)	Connector Body	Brass, Tri-Alloy Plate
Coupling Factor	≤10±0.7dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±0.7dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥20dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.20:1 Secondary ≤1.20:1	Operating Temperature	-20~+65°C
<sup>1</sup> Power Handling	Incident ≤80Watt; Reflected ≤2Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	70g
Port Connectors	SMA-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

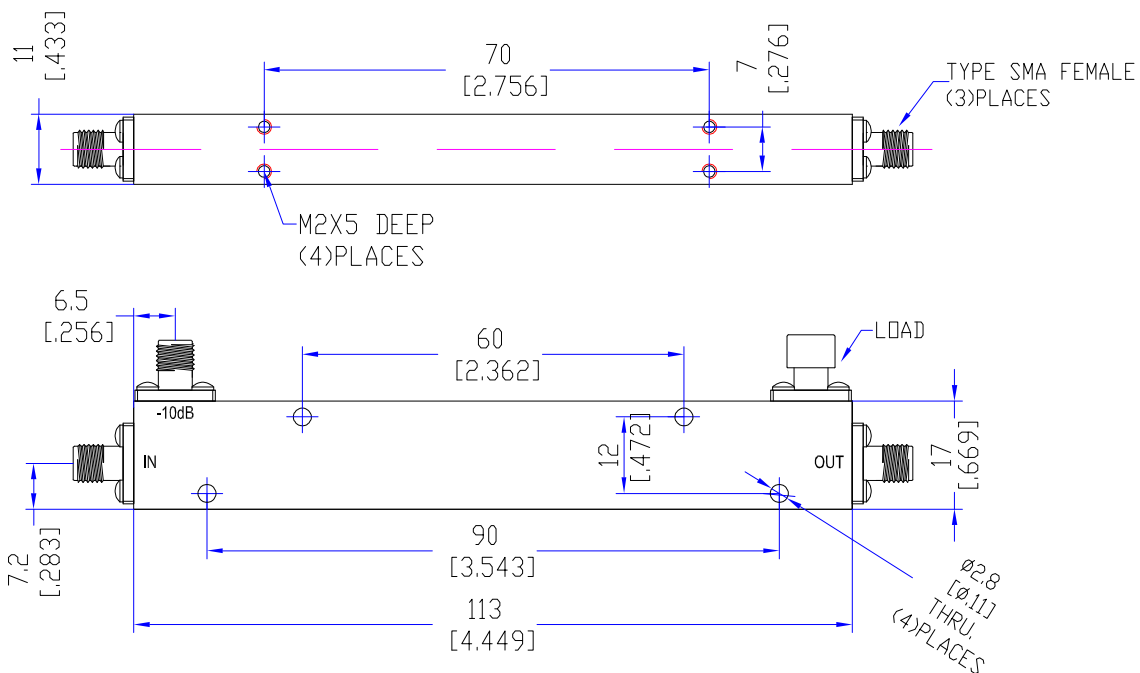


## Typical Performance

### 1. Coupling Factor & Sensitivity, Isolation, VSWR

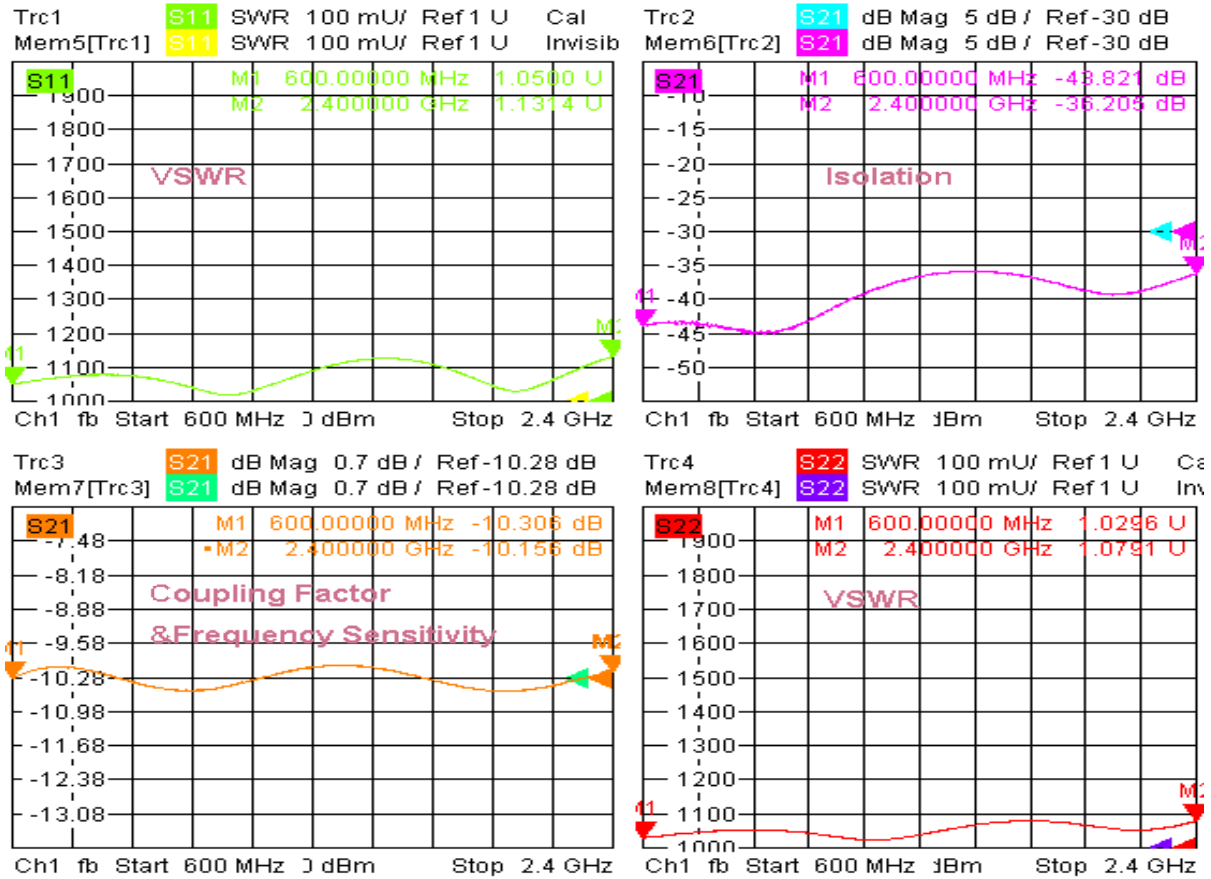

12/29/2020, 12:04 PM

### 2. Insertion Loss

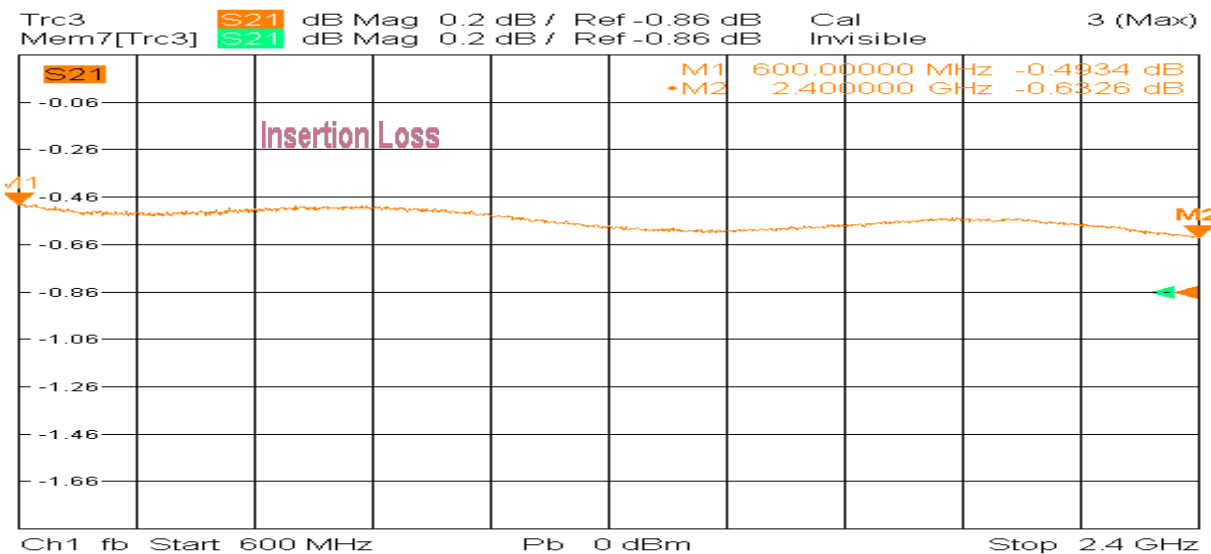

12/29/2020, 1:22 PM

