


**Model TDC265400A20D**

**Features**

- Low VSWR
- High Directivity
- Broadband & Miniature Size





Technical Data Sheet			
Frequency Range	26.5~40GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤2.0dB (Excl. Coupling Loss 0.04dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤20±1.0dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±1.0dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥10dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.60:1 Secondary ≤1.70:1	Operating Temperature	-55~+85°C
<sup>1</sup> Power Handling	Incident ≤20Watt; Reflected ≤20Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	70g
Port Connectors	2.92mm-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

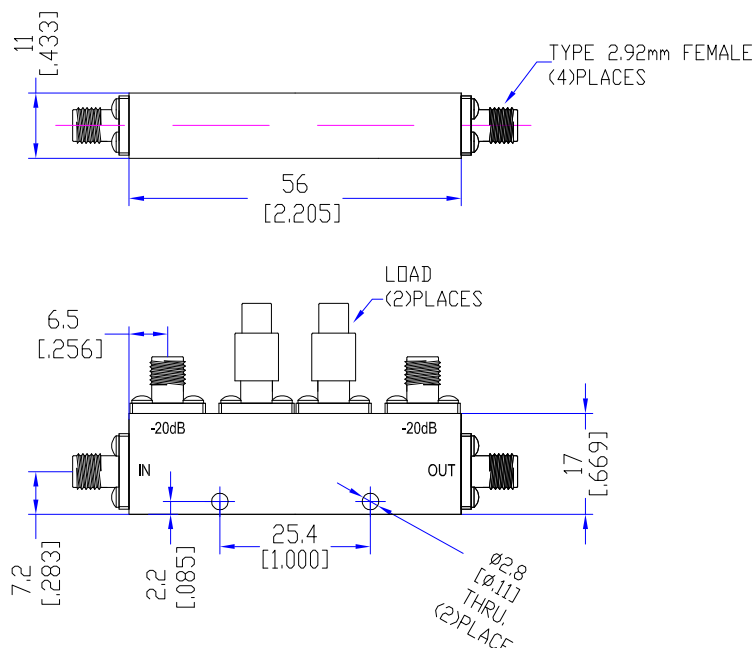

# Typical Performance

## 1. Coupling Factor & Sensitivity, Isolation, VSWR

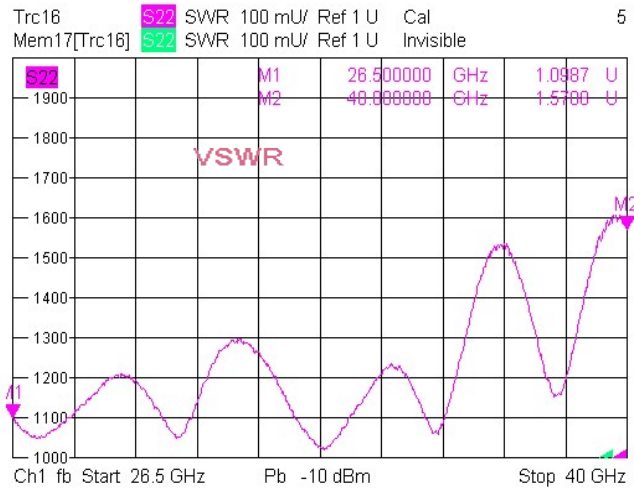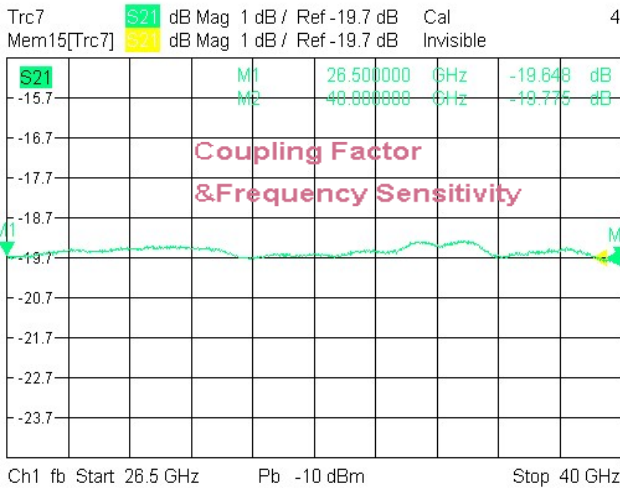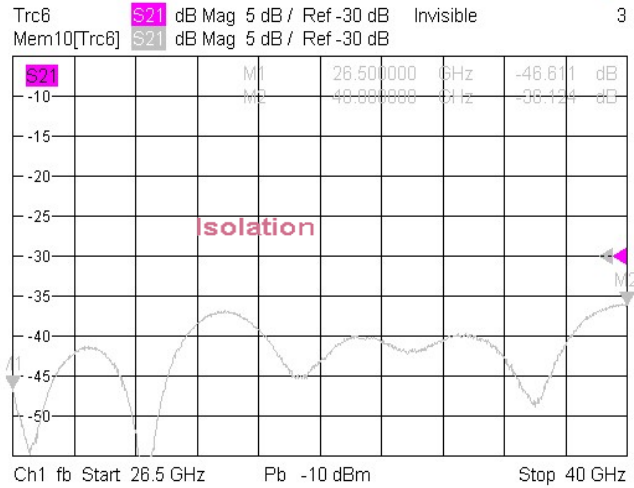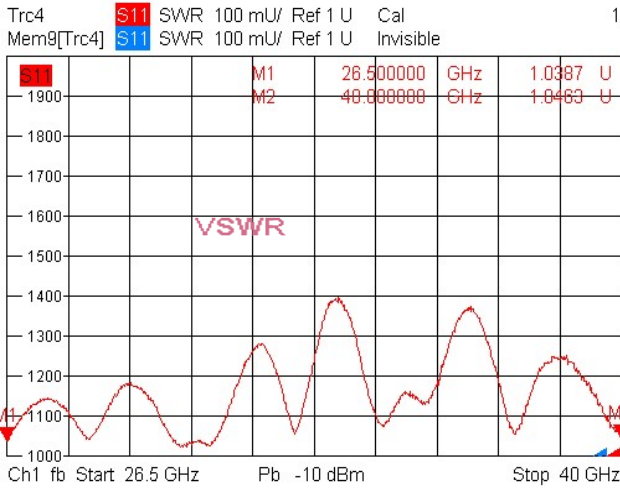


1/18/2022, 5:33 PM




## Typical Performance

### 2. Coupling Factor & Sensitivity, Isolation, VSWR

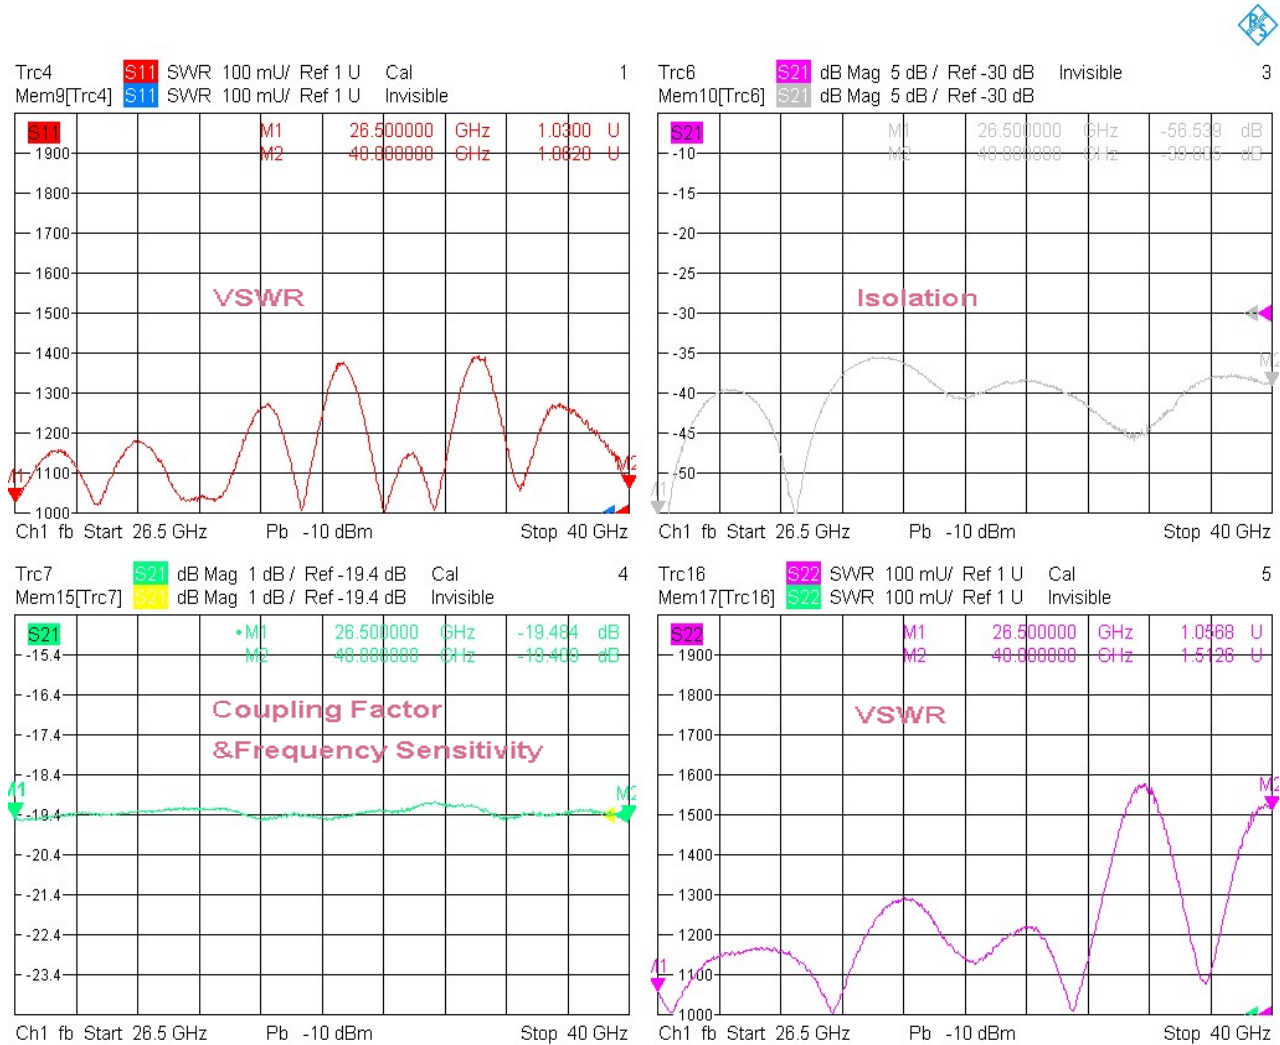

1/18/2022, 5:34 PM

### 3. Insertion Loss

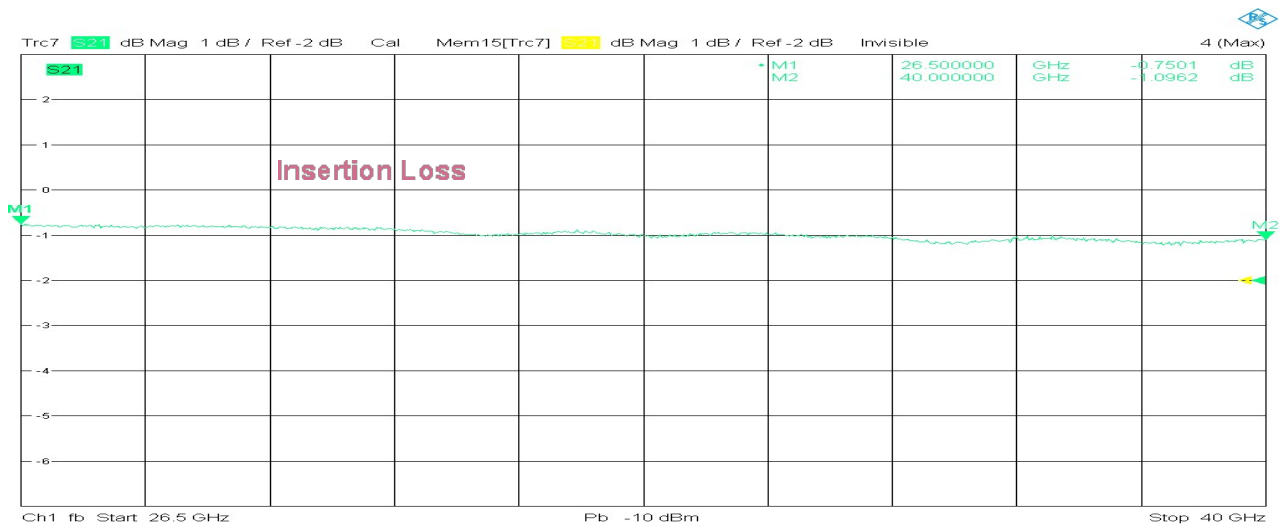

1/18/2022, 5:35 PM

