


Model TDC0770N10DH

Features

Low VSWR
High Directivity
Broadband & Miniature Size


Technical Data Sheet			
Frequency Range	0.7~7GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤0.9dB (Excl. Coupling Loss 0.92dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤10±1.0dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±1.6dB@0.7-0.9GHz ≤±1dB@0.9-8GHz	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥12dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.40:1 Secondary ≤1.40:1	Operating Temperature	-55~+85°C
¹ Power Handling	Incident ≤100Watt; Reflected ≤100Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	520g
Port Connectors	N-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

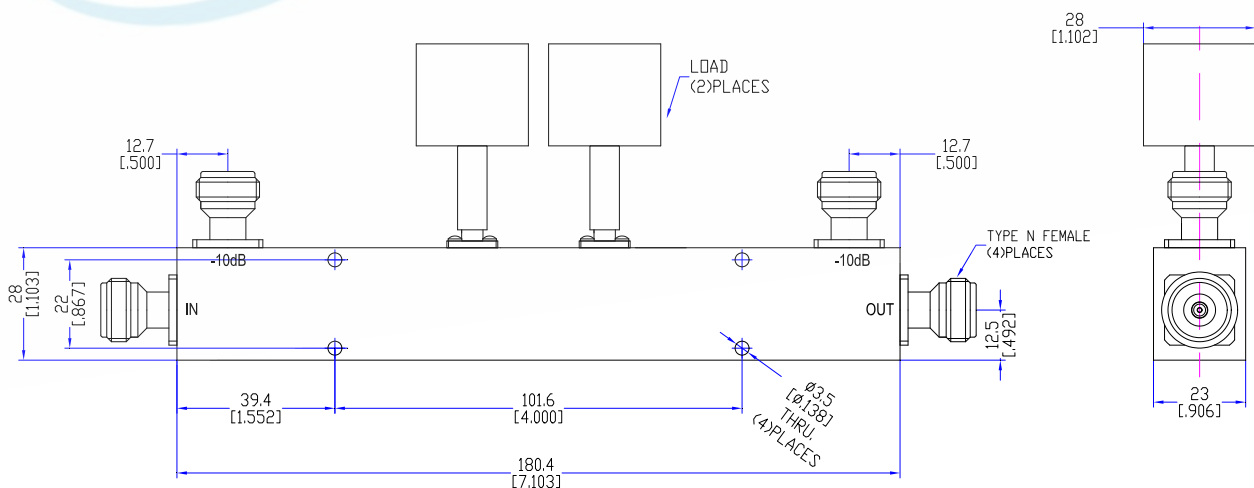

Typical Performance

1. Coupling Factor & Sensitivity, Isolation, VSWR

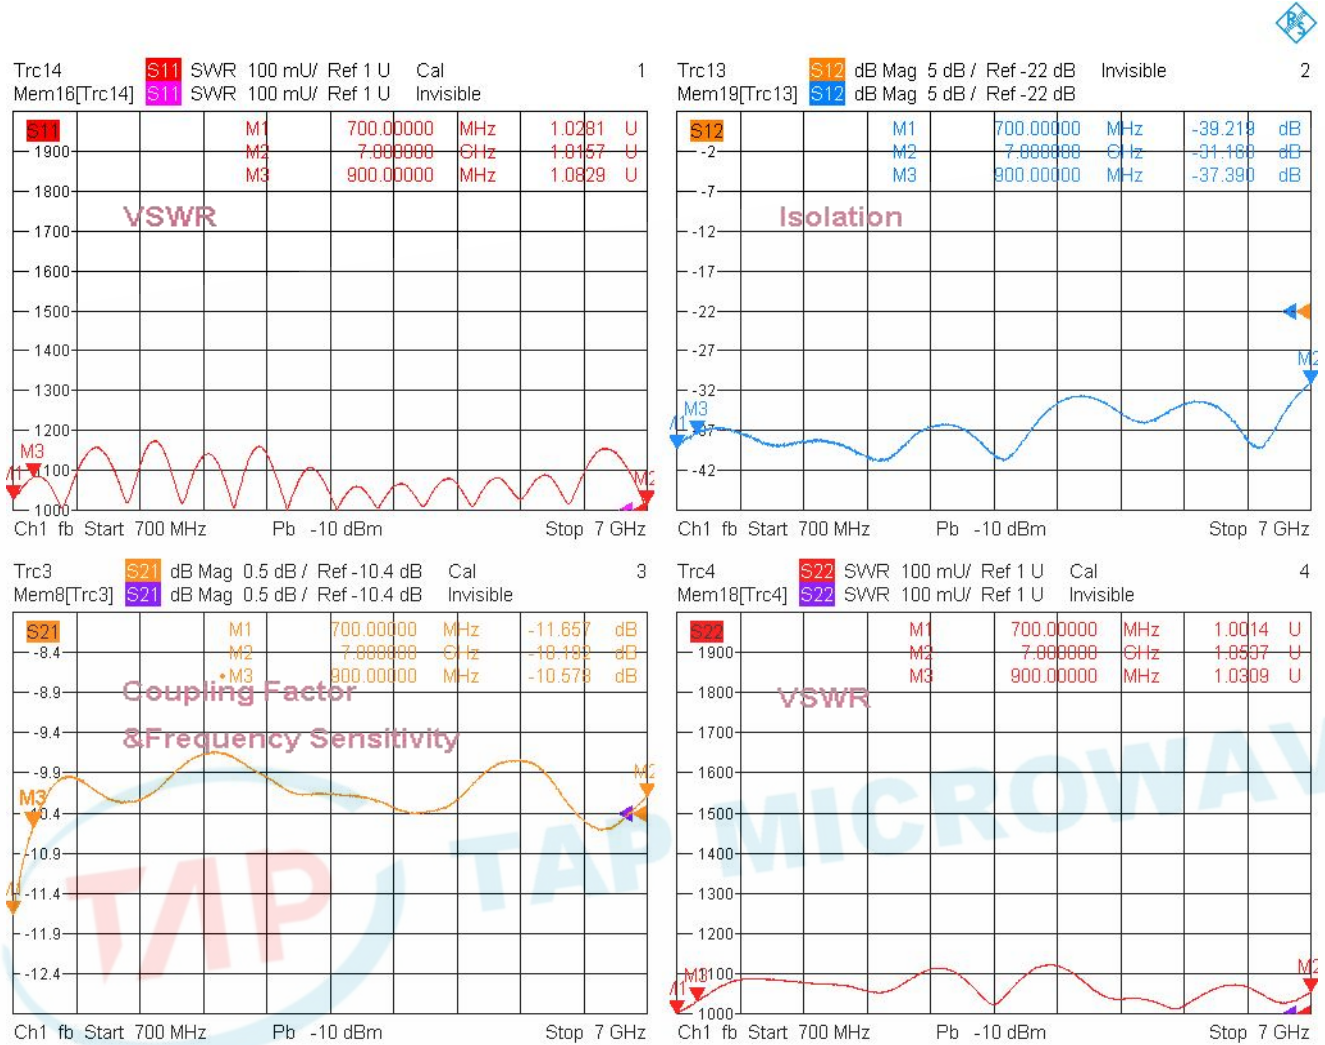


5/14/2024, 10:55 AM




Typical Performance

2. Coupling Factor & Sensitivity, Isolation, VSWR

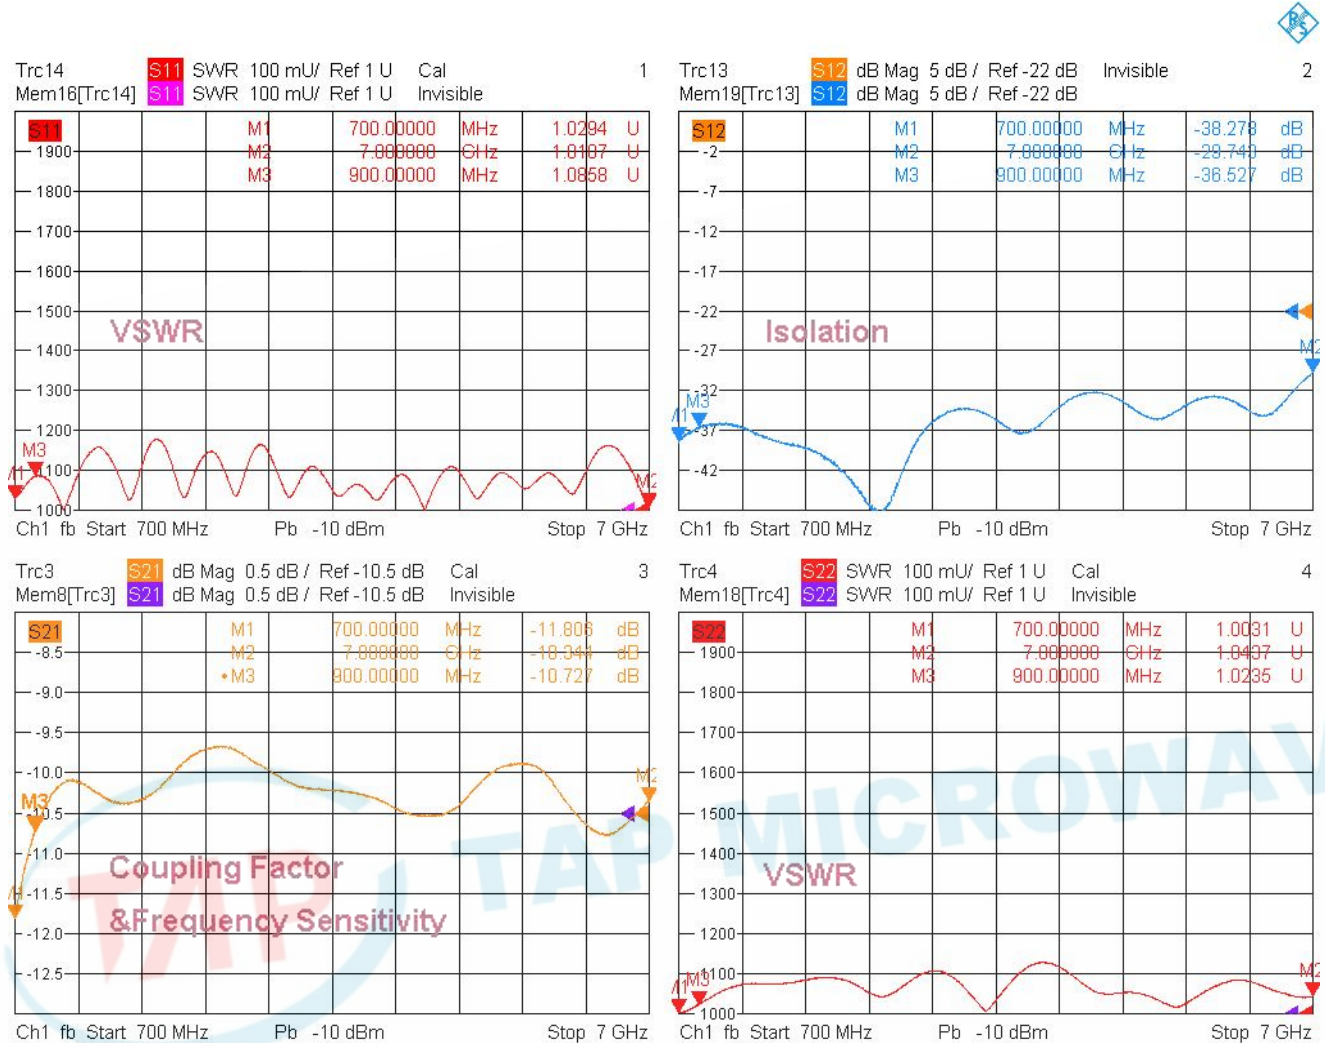

5/14/2024, 10:54 AM

3. Insertion Loss

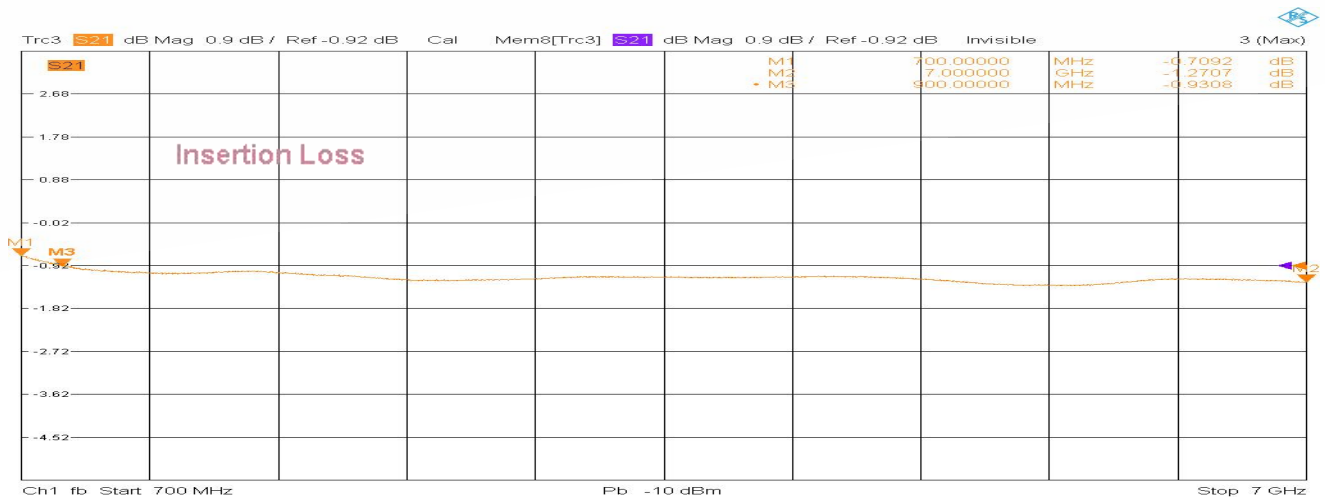

5/14/2024, 11:18 AM

