


### Model THC2223BN

#### Features

Excellent phase & amplitude balance  
Low Insertion Loss & VSWR  
High Isolation


Technical Data Sheet			
Frequency Range	2.2~2.3GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤0.4dB	Housing	Aluminum, 6061 T6
Isolation	≥22dB		Clear Chem Conversion Film
Amplitude Balance	≤±0.4dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±4°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.25:1	Operating Temperature	-55~+85°C
<sup>1</sup> Power Handling	Average ≤50Watt Peak ≤1KW	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	160g
Port Connectors	N-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

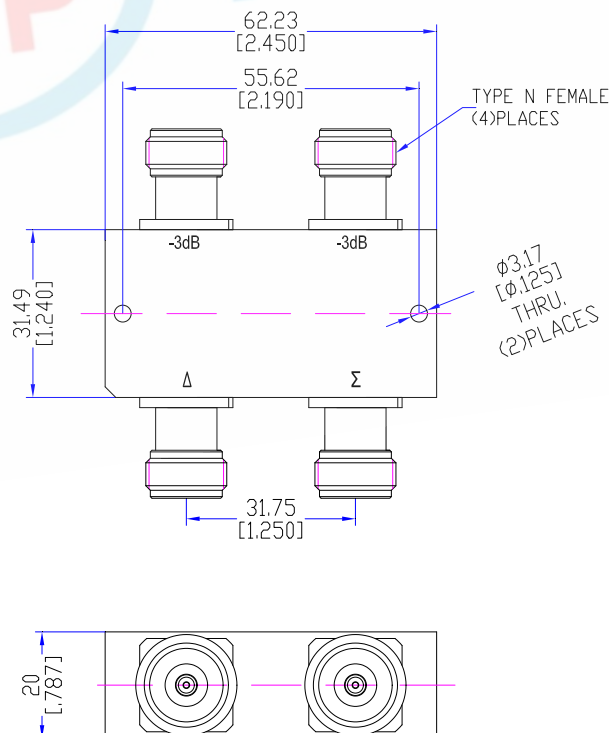

## Typical Performance

### 1. Insertion Loss, Amplitude & Phase Balance, VSWR $_0^\circ$

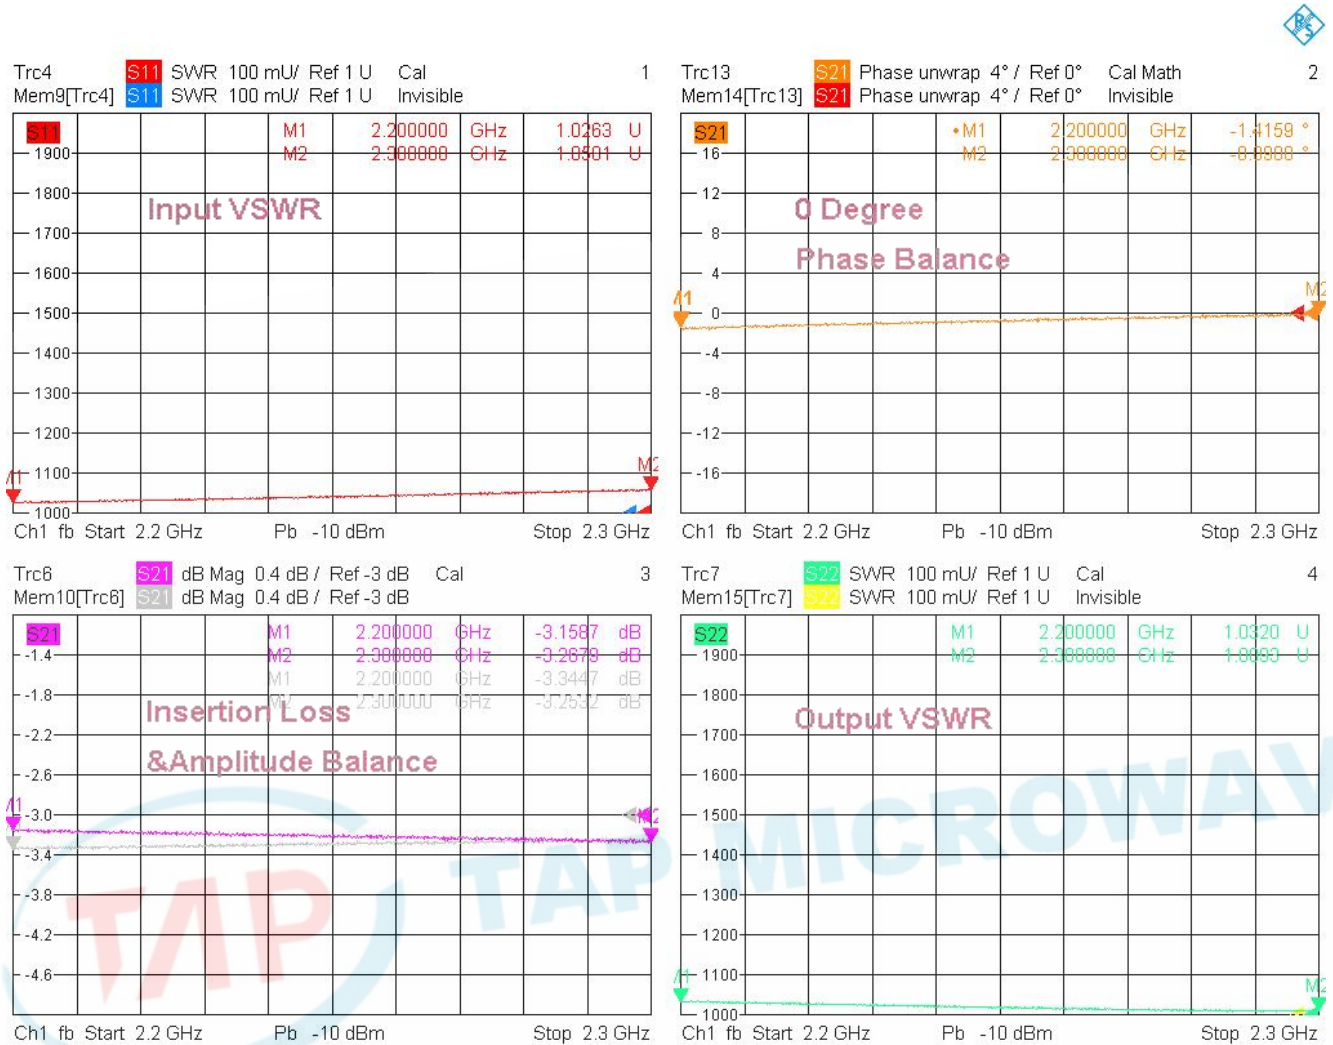


7/22/2024, 10:37 AM




## Typical Performance

### 2. Insertion Loss, Amplitude & Phase Balance, VSWR \_ 180°

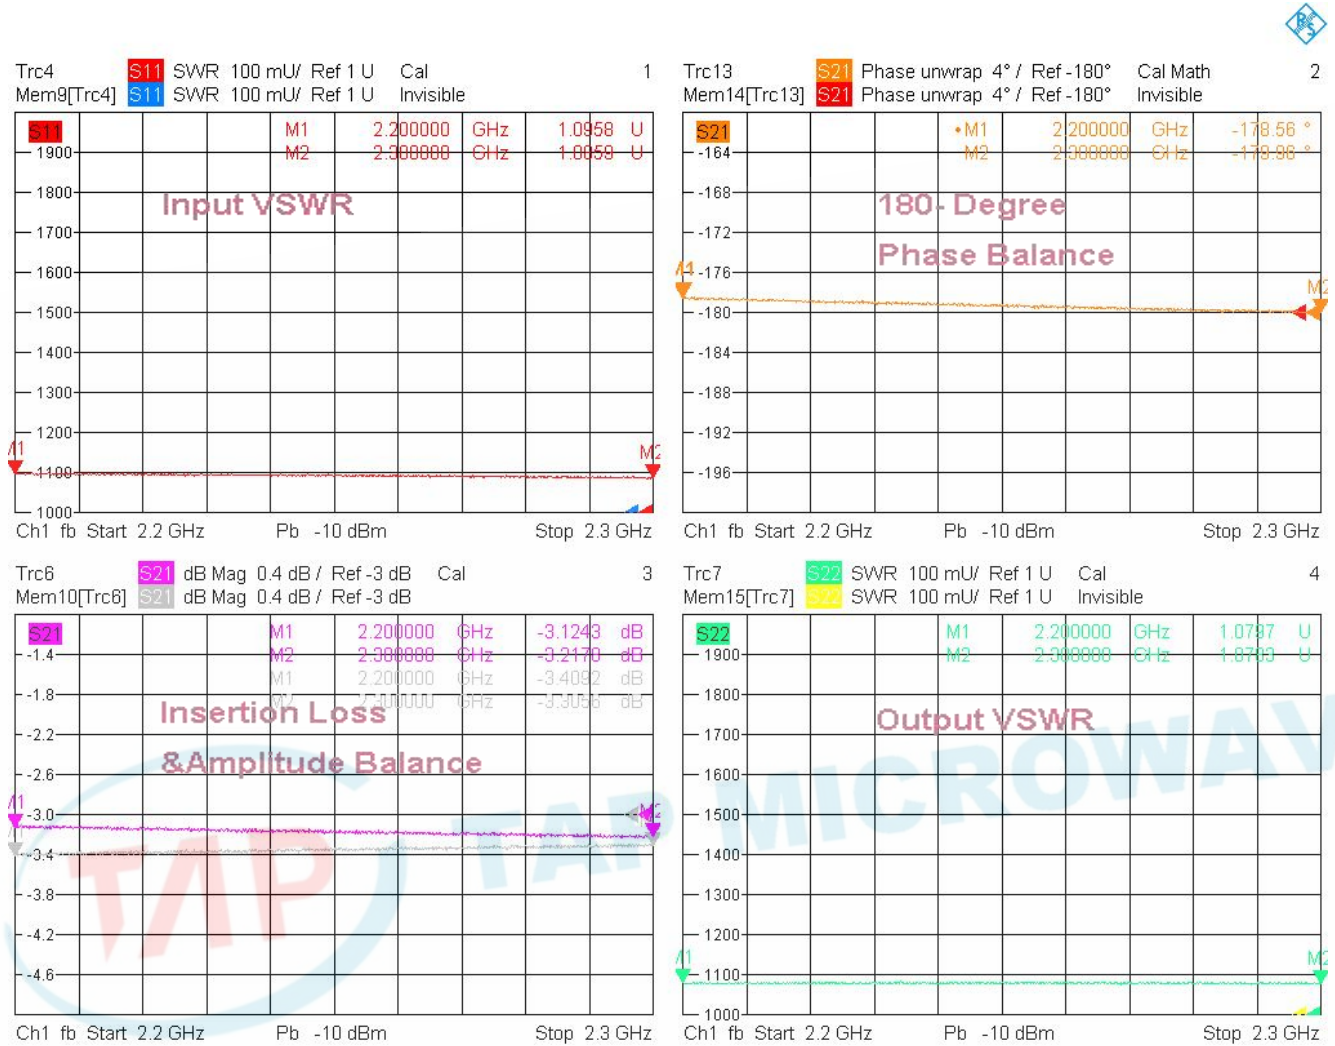

7/22/2024, 10:36 AM

### 3. Isolation

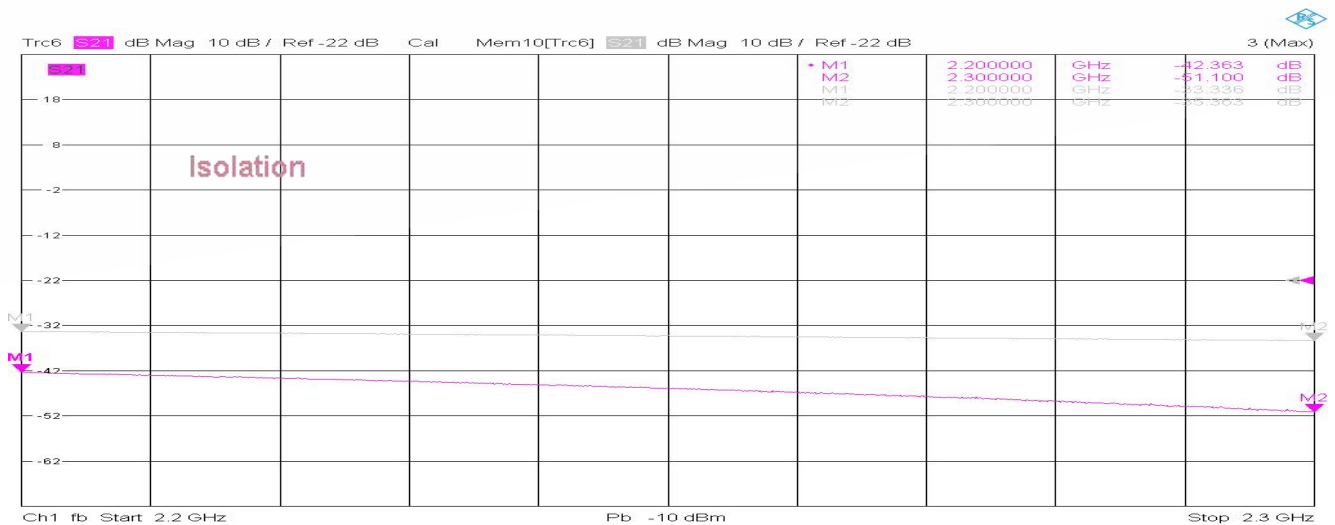

7/22/2024, 10:38 AM

