


Model THC2060NW

Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	2~6GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤0.9dB	Housing	Aluminum, 6061 T6
Isolation	≥18dB		Clear Chem Conversion Film
Amplitude Balance	≤±0.5dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±5°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.35:1	Operating Temperature	-55~+85°C
¹ Power Handling	Average ≤50Watt Peak ≤3KW	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	IP Rate	IP66
Port Connectors	N-Female	Weight	160g

¹Power Handling guaranteed when load's VSWR within 1.50:1.

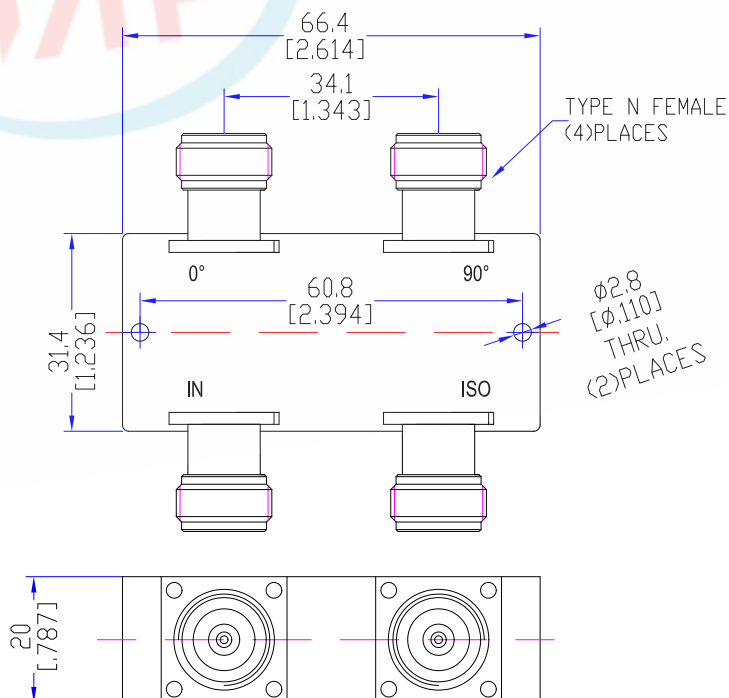

Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR

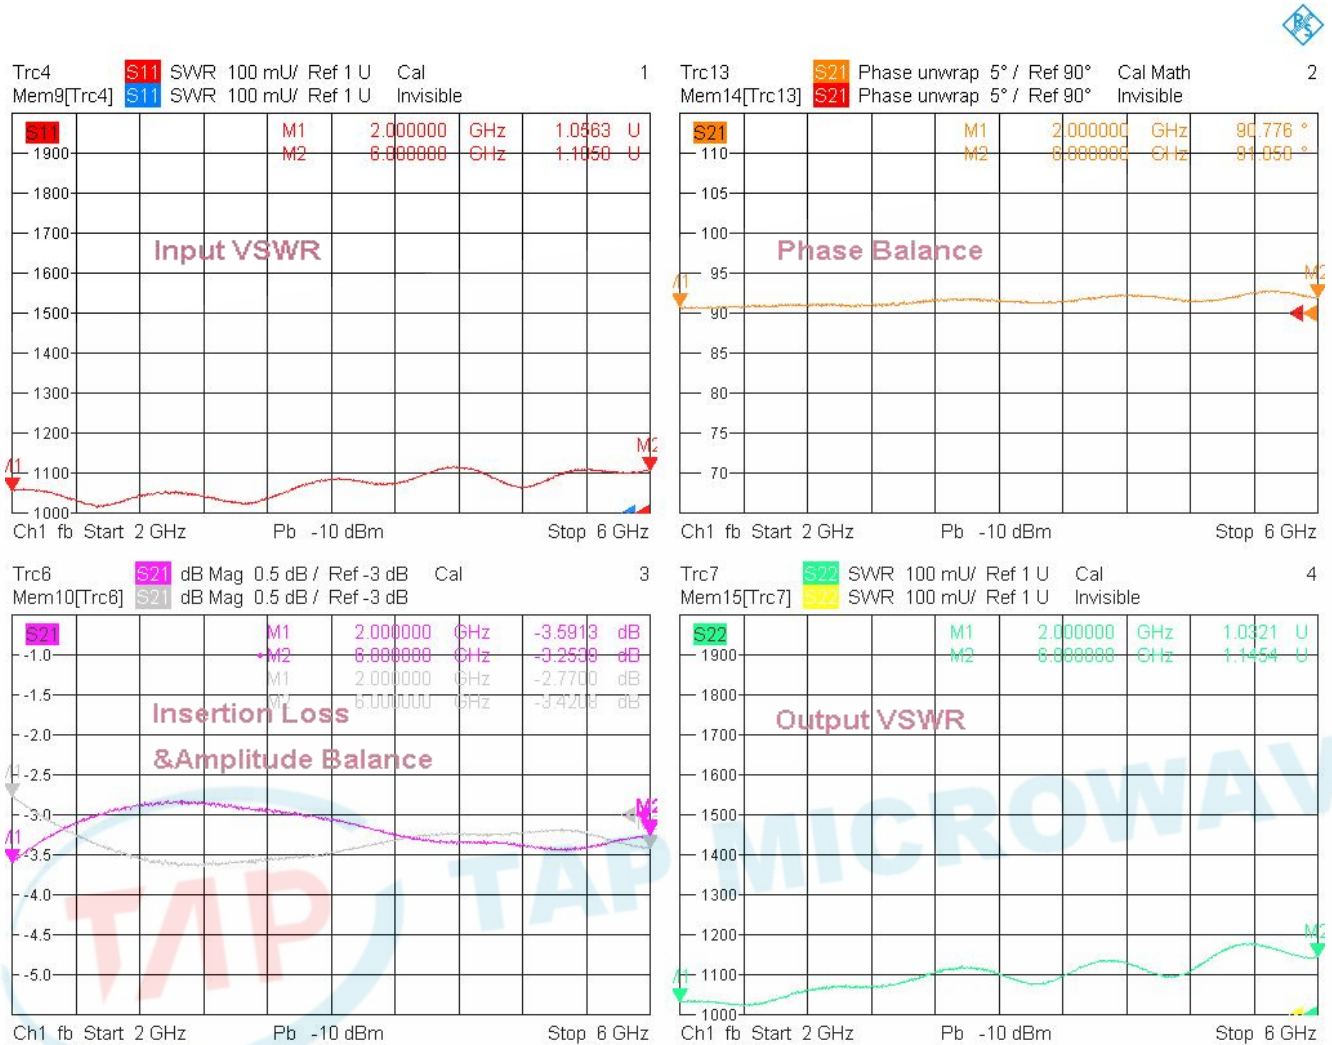


9/4/2024, 11:49 AM




Typical Performance

2. Insertion Loss, Amplitude & Phase Balance, VSWR

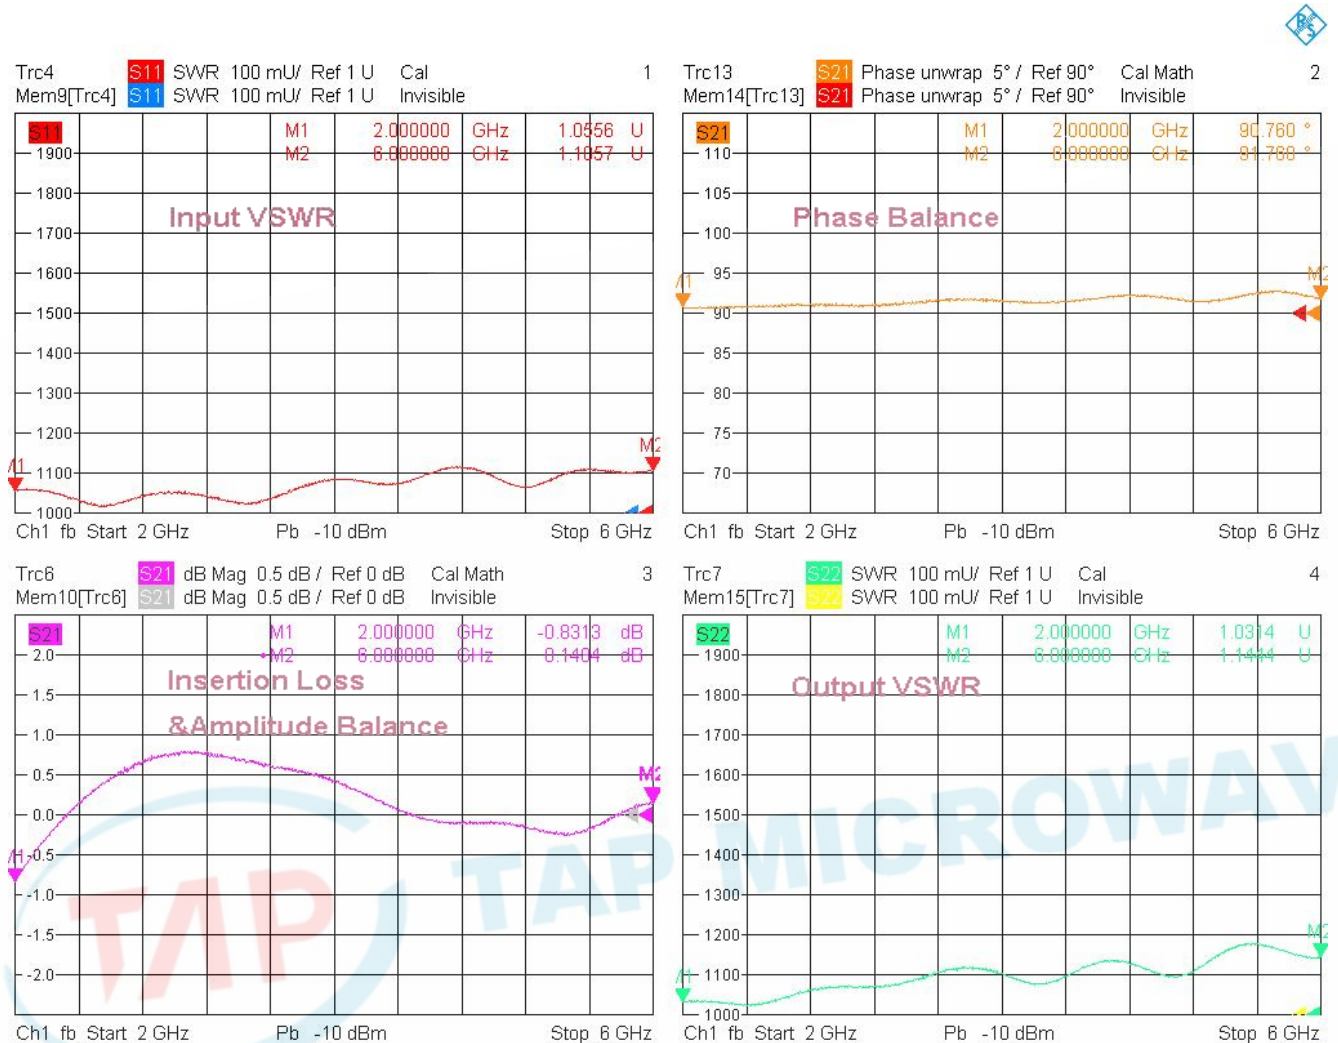

9/4/2024, 11:48 AM

3. Isolation

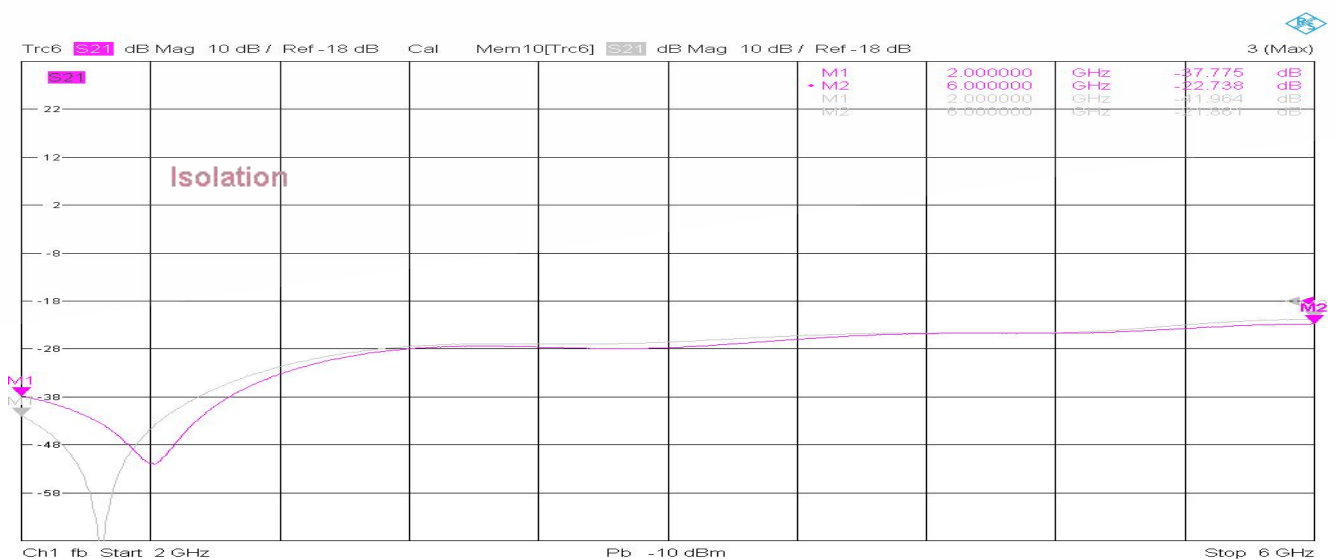

9/4/2024, 11:50 AM

